



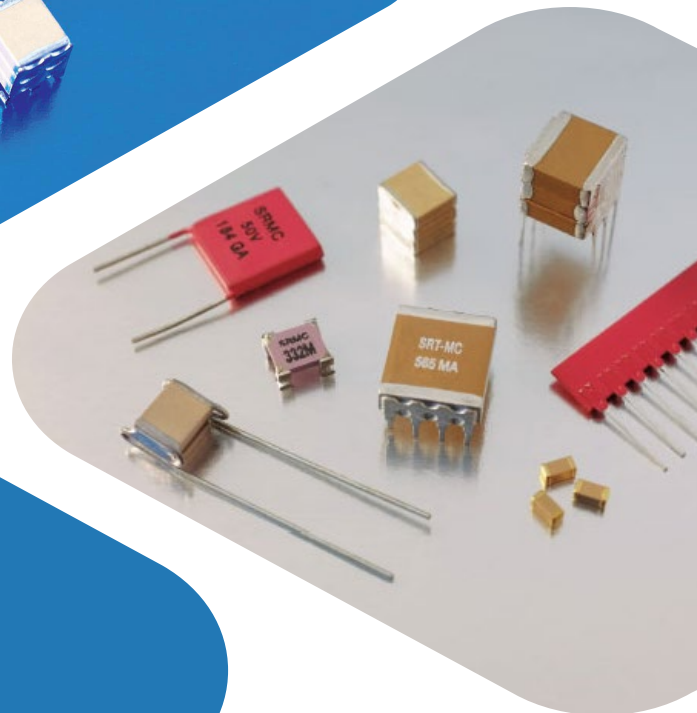

SRT

MICROCÉRAMIQUE

MLCC CAPACITORS

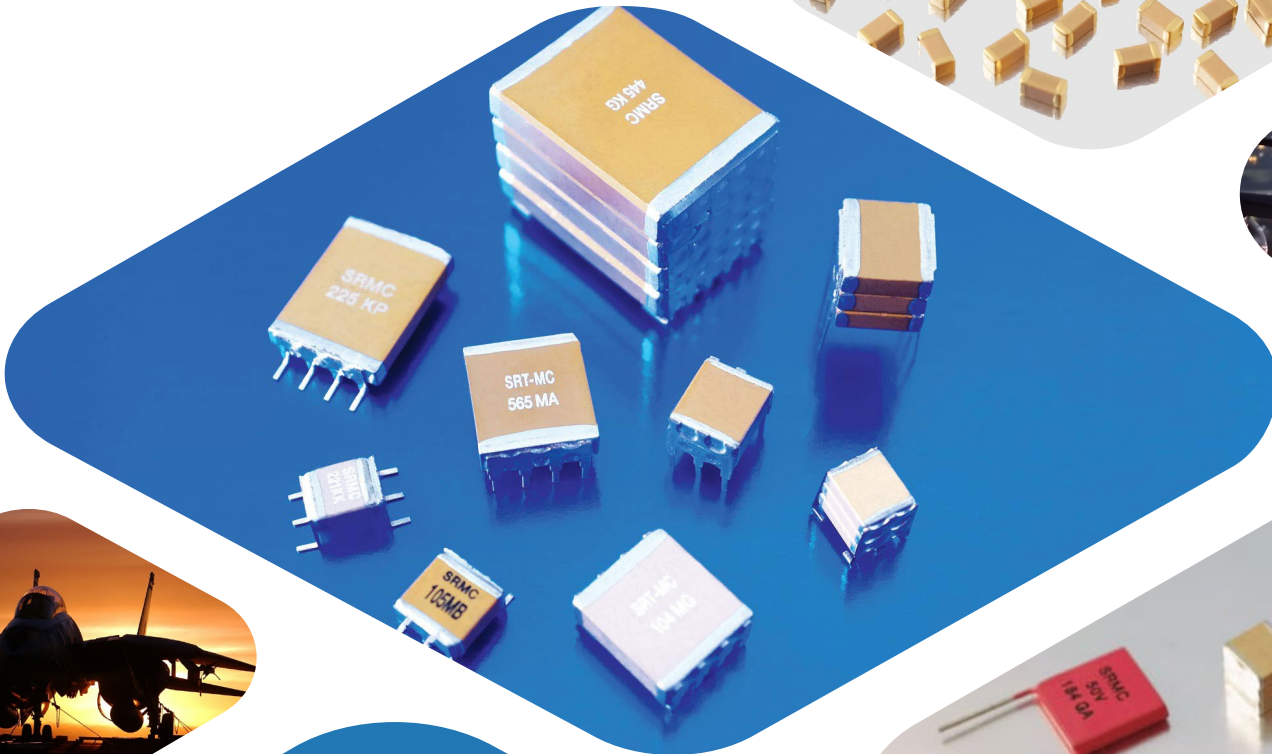

- › MLCC, FILTERS, STACK, RADIAL
- › STANDARD AND CUSTOM PRODUCTS
- › HIGH VOLTAGE, FREQUENCY, PRECISION
- › HIGH REACTIVITY, SHORT LEAD TIMES
- › SERVICE PROVIDER
- › COMPLETE PASSIVE & THERMAL SOLUTIONS
- › MANUFACTURED IN FRANCE



SRT MICROCÉRAMIQUE

We manufacture MultiLayer Ceramic Capacitors and filters in France. Established in 1982 in Vendôme by former Vishay-Vitramon employees, SRT-Microcéramique is one of the only two companies still producing MLCCs in Europe. We are specialized in high value components, high voltage, high frequency, high precision, high reliability, low ESL, non-magnetic components and precision filters.

*Manufactured in Europe,
short lead time guaranteed
(4 to 8 weeks)
No obsolescence*

Applications of our products include commercial aerospace, defense, medical applications (both implantable and imaging), space level, military aircraft and ground-based systems, high temperature (geophysical and geothermal), pulse discharge with high repetition rate, and a variety of commercial and industrial applications.



OUR PRODUCTS

Range from Multi-layer Surface Mount Chip, to Stack, Radial leaded and vertical layers capacitors and filters in a variety of dielectrics and the full range of termination to suit your applications. We can produce large or small quantities.


*Cross reference to most competitors designs :
Exxelia, Syfer, Kemet, Presidio...*

Due to our very flexible production we can guarantee the absence of obsolescence. Our highly qualified engineer team works in close cooperation with our customers to develop custom designs and variations for their specific need.




SMD

- 0201 -> 8060
- COG, X7R, High Q, HT
- Voltage : 16V -> 15KV
- Polymer option
- Sn, Au, AgPd term



STACKS

- High power
- Low volume
- High reliability




RADIALS

- Encapsulated
- Dipped
- Severe environment
- Historical design




NON MAGNETIC

- Cu-Sn termination
- All SMD available
- Medical application
- High Tesla



MICROELECTRONIC

- Vertical layer 0303
- Au termination for bonding
- 0202 single layer (2024)




FILTERS

- EMI M2F MCF MPF series
- High precision
- Large currents



SPECIAL DESIGN

- Barcap capacitors
- Capacitors arrays
- Large cases



CUSTOMS

- Very high tension 32K
- Any value
- Any size
- Any Voltage



SnPb/SAC

- Dipped or electrolytic
- Medical application
- Space application

This document is subject to change without notice.

SERVICES

Thanks to our cutting edge industrial equipment to produce MLCCs, we also offer a large range of services to our partners : full silver-nickel/tin termination process of various electronic components, termination change to lead/silver for medical and space applications, precision sorting and taping, testing and burn-in for high Reliability needs.

| TERMINATION | PRECISION SORTING | BURN IN/TESTING | TERMINATION CHANGE | TAPING | SOURCING |
|--|-------------------|-------------------------------|---|--|--|
| Various SMD components Medical, Space application | Up to 0,03% | High Reliability test program | Ag/Pd Sn/Pb Cu/Sn SAC, Au Medical, Space applications | We can put on reel any kind and any volume of components | Passive and active components from multiple source at best price |

THEY TRUST US

Over the years, we developed close relationships with large international groups and high technology companies, for which we provide unique services and custom products.

Our relationship is based on a culture of trust, service and open communication.

MARKETS APPLICATIONS

AEROSPACE INDUSTRIAL MEDICAL ENERGY RAIL SPACE TELECOM MILITARY

QUALITY AND CERTIFICATIONS

In order to ensure the highest reliability to our customers our quality process includes a full traceability, 100% visual and electrical test and burn-in. For special requirements we offer standard and specific qualification programs including, thermal cycling, humidity test, life test, thermal shock, vibration test, shear test, pull test...



We follow internally AECQ200 and MIL-STD-202 testing. SRT-Microcéramique is ISO-9001 since 2002. We are REACH and conflict of minerals compliant. Most of our products are ROHS certified.

PASSIVE AND THERMAL SOLUTIONS

Our distribution branch Milton Ross Composants, in addition to our own ceramic production can offer the full range (except tantalum) of capacitors (film, electrolytic) and resistors (thick film, thin film, wirebound) through our partnership with specialized manufacturers (mainly European) offering the same high value product, high voltage, high precision, large values, custom products with always the shortest lead time.



INNOVATION : HYDROGEN FUEL

In addition to our constant R&D to improve and innovate in our MLCC discipline we are leveraging our unique ceramic process knowledge to develop in collaboration with the CEA an innovative ceramic fuel cell production line offering the highest performance of the market.



GENERAL INFORMATION

| | |
|--|----|
| Company..... | 2 |
| Services..... | 3 |
| Table of Content..... | 4 |
| Dielectric Types..... | 6 |
| Terminations details..... | 7 |
| Storage and Soldering..... | 8 |
| Footprint..... | 12 |
| How to order, Reliability, Sorting options..... | 13 |
| Packaging dimension and quantity..... | 14 |
| High Reliability Screening Levels..... | 15 |
| Tests and Qualifications..... | 16 |
| Tests and Qualifications Space applications..... | 17 |
| Construction..... | 18 |
| Regulation and compliance..... | 19 |

SMD LOW VOLTAGE

| | |
|---|----|
| SMD Low Voltage Class I..... | 20 |
| SMD Low Voltage N2T..... | 24 |
| SMD Low Voltage Class II..... | 28 |
| High Capacitance capacitors..... | 32 |
| Low Inductance Capacitors Class II..... | 35 |

SMD HIGH VOLTAGE

| | |
|---------------------------------|----|
| SMD High Voltage Class I..... | 38 |
| SMD High Voltage N2T..... | 42 |
| SMD High Voltage Class II..... | 46 |
| SMD Pulse Energy Capacitor..... | 50 |
| SMD Very High Voltage..... | 51 |

NON MAGNETIC

| | |
|-----------------------|----|
| Non Magnetic SMD..... | 52 |
|-----------------------|----|

SPACE MEDICAL APPLICATION

| | |
|--------------------------------|----|
| Space Medical application..... | 53 |
|--------------------------------|----|

HIGH TEMPERATURE

| | |
|------------------------------------|----|
| SMD High Temperature Class I..... | 54 |
| SMD High Temperature Class II..... | 56 |

SAFETY CAP

| | |
|----------------------------|----|
| Safety Certified MLCC..... | 58 |
|----------------------------|----|

HIGH Q

| | |
|------------------------------|----|
| MLCC High Q..... | 60 |
| MLCC High Q RF Power..... | 63 |
| MLCC High Q Design Kits..... | 68 |

MICROELECTRONIC

| | |
|--|----|
| RF DECOUPLING X7R Vertical Electrodes Capacitor..... | 69 |
| SMD Gold Termination..... | 71 |



FILTERS

| | |
|----------------------|----|
| EMI MCF Filter | 73 |
| EMI M2F Filter | 75 |
| EMI MPF Filter | 77 |

STACKED

| | |
|--------------------------------------|----|
| STACKED CAPACITOR High Power | 79 |
| STACKED CAPACITOR High Voltage | 82 |
| STACKED CAPACITOR Vertical | 85 |
| STACKED CAPACITOR High Compact | 88 |

THROUGH HOLE

| | |
|--|----|
| RADIAL CAPACITOR Dipped High Power | 91 |
| RADIAL CAPACITOR Dipped High Voltage | 93 |
| RADIAL CAPACITOR Encapsulated | 95 |
| AXIAL CAPACITOR Encapsulated | 97 |
| 4 LEADS CAPACITOR Encapsulated | 99 |

CUSTOM PRODUCTS

| | |
|-----------------------|-----|
| CUSTOM PRODUCTS | 101 |
|-----------------------|-----|

CROSS REFERENCES

| | |
|-------------------------------------|-----|
| SMD CAPACITORS | 102 |
| RADIAL CAPACITOR Dipped | 104 |
| RADIAL CAPACITOR Encapsulated | 105 |
| AXIAL CAPACITOR Encapsulated | 106 |
| STACKED CAPACITOR Horizontal | 107 |
| STACKED CAPACITOR Vertical | 108 |
| FILM CAPACITORS | 109 |

Different types of dielectrics display very different behaviours when it comes to withstanding power and heat, and don't demonstrate the same capacitance potential. SRT-Microcéramique proposes a wide range of ceramics. You'll find in the page below more information about what type of ceramic is better suited to your needs.

Class I Dielectrics

Class I Dielectrics are the most stable type and are used when the application demands highly stable performance and cannot allow electrical noise or dielectric loss. Variations of voltage and temperature have minimum consequences on this class of dielectrics. Consequently, they are most used for DC blocking, decoupling applications as well as filtering with low capacitance.

Q (Code Q)

- High Q (>2000)
- RF application up to 30 Ghz
- High Current

NPO (Code A)

- Most stable type
- Lower capacitance
- Good for avoiding electrical noise

Class I N2200 Dielectrics

Class I stability with close to Class II volumetric capacitance

N2T (Code P)

- Ultra stable
- No piezo electric effect
- High current pulse discharge

Class II Dielectrics

Class II Dielectrics display stable performance and possess a better volumetric efficiency than class I. Thus, they are used in bypassing, filtering, coupling and decoupling applications.

X7R (Code Y)

- Good volumetric efficiency
- High capacitance
- Stable

BX/BY (Code X/2C1)

- Improved ESR
- Better voltage coefficient
- MIL specifications

X7S/X7T/X6S/X5R/Y5V (Code T/W/R/S/V)

- Highest capacitance per volume
- Less stable
- Low voltage

| Dielectric | Class I | | | Class II | | | | | | | | |
|---------------------------------|---------------------------------------|------------|------------------|------------------|---------------|----------|------------------------------------|-----------------|-----------------|-----------------|---------------|----------------|
| | High Q | NPO/COG | N2T | X7R | BX | 2C1 | X5R | X7S | X6S | X7T | Z5U | Y5V |
| SRT Code | Q | A | P | Y | X | BY | R | T | S | W | U | V |
| Type | Ultra Stable | | | Stable | | | | | | | | |
| Temperature Range | -55°C +125°C (250°C) | | | -55°C +125°C | | | -55°C +85°C | -55°C +125°C | -55°C +105°C | -55°C +125°C | +10°C +85°C | -30°C +85°C |
| T° Coefficient no DC applied | ± 30ppm | | 2200ppm ± 350 | ± 15% | | ± 20% | ± 15% | ± 22% | | +22% -33% | +22% -56% | +22% -82% |
| T° Coefficient rated DC applied | - | | | - | +15 -25% | +20 -30% | - | | | | | |
| Dielectric constant | 10-100 | | 450 | 2000-3000 | | | 3000-20000 | | | | | |
| Dissipation Factor | 0.01% | 0.05% 0.1% | | 1% 3.5% | | | 2.5% 15% | | | 5% 20% | | |
| IR 25°C/Un | 100 GΩ or 1000 Ω-F whichever is less | | | | | | 10 GΩ or 100 Ω-F whichever is less | | | | | |
| Dielectric strenght ≤200V | 2.5 Ur 5 seconds 50mA max | | | | | | | | | | | |
| Dielectric strenght <500V | Ur + 250V 5 seconds 50mA max | | | | | | | | | | | |
| Dielectric strenght <1000V | 1.5 Ur 5 seconds 50mA max | | | | | | | | | | | |
| Dielectric strenght ≥1000V | 1.2 Ur 5 seconds 50mA max | | | | | | | | | | | |
| Piezo effect | No piezo | | | piezo effect | | | | | | | | |
| Ageing | None | | | 2% per decade | 1% per decade | | 4% per decade | 5% per decade | | | 7% per decade | |
| Tolerance | ± 0.25pF ± 0.5pF ± 1% ± 2% ± 5% ± 10% | | | ± 5% ± 10% ± 20% | | | ± 10% ± 20% | | | -20% +80% | | |
| Termination | X,F,P,C,W,H,I | | | | | | X,P,G,W,H,I | | | | | |

All our capacitors are available with a wide range of termination to fit your specific needs :

Tin (Code X)

- Standard termination
- ROHS
- Dipped Silver, Nickel barrier, Sn plated
- Process qualified according to JDEC JESD201A regarding whisker mitigation

Polymer (Code P)

- Flexible termination
- Improve bending tolerance
- ROHS
- Available on all components
- Designed for gluing

Silver-Palladium (Code F)

- Excellent contact properties
- Resist to leaching during hand soldering
- Dipped Silver-Palladium
- ROHS

Gold Flash (Code W)

- Glueing
- ROHS
- Max 0.2µm Gold Flash

Gold Thick (Code G)

- Microelectronic applications
- Wire Bonding/glueing
- ROHS
- Min 2.5µm Gold

Non Magnetic (Code C/CP)

- High Tesla Applications
- IRM, particule accelerators
- Dipped Silver, Copper barrier, Sn plated
- ROHS

Solderable Silver (Code Q)

- Medical or space application
- Whiskers free
- High temperature
- ROHS

Dipped SAC 305 (Code S/SP)

- Sn96.5 Ag3 Cu0.5
- Medical, space and oil application
- Whiskers free
- High reliability
- ROHS

Dipped Tin-Lead (Code H/HP)

- Sn62 Pb36 Ag2
- Medical or Oil application
- Whiskers free
- High reliability

Electrolytical Tin-Lead (Code I/IP)

- Minimum Pb 5%
- Medical or space application
- Whiskers free
- High reliability

| TERMINATION | CODE | ROHS | NON MAGNETIC | IMPROVED BOARD FLEX | SOLDERING | GLUING | WIRE BONDING |
|---------------------|------|------|--------------|---------------------|-----------|--------|--------------|
| Sn | X | 0 | | | 0 | | |
| Polymer | P | 0 | | 0 | 0 | | |
| AgPd | F | 0 | | | 0 | 0 | |
| Gold Flash | W | 0 | | | 0 | 0 | |
| Gold Thick | G | 0 | | | 0 | 0 | 0 |
| Non Magnetic | C | 0 | 0 | | 0 | | |
| Solderable Silver | Q | 0 | | | 0 | | |
| Dipped SnPb | H | | | | 0 | | |
| Dipped SAC | S | 0 | | | 0 | | |
| Electrolytical SnPb | I | | | | 0 | | |
| Lead | - | 0 | | 0 | 0 | | |
| Non Magn Lead | C | 0 | 0 | 0 | 0 | | |
| Lead Frame | - | 0 | | 0 | 0 | | |
| Non Magn Lead Frame | C | 0 | 0 | 0 | 0 | | |

0 = COMPLIANT

STORAGE

To preserve the solderability of terminations, observe the following storage conditions :

- Indoors at 5–40°C and 20–70% relative humidity.
- Free from harmful gases (sulfuric acid, ammonia, hydrogen sulfide, chlorine).
- Original sealed packaging until use; re-seal opened packs as soon as possible.

Tape-and-reel products must be stored away from direct sunlight, which can degrade the carrier tape or the cover adhesive.

Use within 24 months from shipment. For longer storage, perform a solderability check before mounting (terminal Sn dipping test per IPC J-STD-002).

HANDLING

MLCCs are dense, hard, brittle ceramic bodies, abrasive against soft materials. They are sensitive to mechanical shock and to PCB bending stress after assembly. Handle with care to avoid cracks, chips, and metallization damage :

- Use plastic or vacuum tweezers. Metal tweezers can scratch the terminations or chip the ceramic edge.
- Do not stack loose parts in trays — chip-against-chip contact during transport produces micro-cracks.
- Tape-and-reel packaging is suitable for automatic pick-and-place equipment.
- For SMD stacks, large case sizes, and radial leaded parts, single-piece handling and dedicated trays are recommended.

After mounting, avoid board flexing during depaneling, tightening, or testing. Chip cracks induced by board bending remain the dominant failure mode in service.

PREHEAT

Preheat brings the entire assembly to a uniform intermediate temperature before solder melting, limiting the thermal gradient at the moment the solder reaches liquidus. The temperature differential between the solder and the component surface (ΔT) must be kept as small as possible.

- Standard ramp-up rate : $\leq 3^\circ\text{C/s}$.
- Fragile profile ramp-up rate : $\leq 2^\circ\text{C/s}$.
- The preheat plateau (T_{min} to T_{max} for reflow; T_{pre} for wave and vapour phase) must be held long enough for the component body to reach equilibrium with the board.

Refer to the applicable profile graph and parameter table.

SOLDERING FLUX

Use mildly activated rosin (RMA) or no-clean (RA without active halides) fluxes. Avoid strongly activated or water-soluble fluxes, which leave corrosive residues incompatible with high-reliability applications.

- Halide content < 0.2 wt% (chlorine equivalent).
- Rosin-based, pH-neutral residues.
- For AgPd terminations (code F), use fluxes free of strong organic acids to limit silver leaching during the time above liquidus.

Solder volume must be controlled to avoid stress between the solder fillet, the component, and the substrate. Excessive solder height transmits board flex directly to the ceramic body and is the most frequent cause of installation cracks.

SOLDERING TYPE

The following solder alloys are compatible with SRT MLCCs:

- SnPb eutectic (Sn63/Pb37, Sn62/Pb36/Ag2) — standard for SnPb terminations (code S). Peak $\leq 215^\circ\text{C}$.
- Lead-free SAC305 (Sn96.5/Ag3.0/Cu0.5) and equivalent standard for Sn terminations (codes X). Peak $\leq 245^\circ\text{C}$.
- High-Ag SnPb ($\geq 2\%$ Ag) — recommended for AgPd terminations (code F) to limit silver leaching.
- Au-Sn eutectic (Au80/Sn20) — required for bonding gold terminations (code G). Reflow under N₂ atmosphere is mandatory.

For non-magnetic terminations (code C), use SnPb or lead-free SAC305 only.

SOLDERING ATMOSPHERE

Soldering atmosphere affects wetting quality and oxidation of sensitive metallizations :

- **Air**: standard for Sn, NiSn, and SnPb terminations on chip MLCCs ≤ 1812 .
- **Nitrogen (N₂)** is recommended for:
 - All fragile profile applications.
 - AgPd terminations (code R) — limits silver tarnishing.
 - Gold terminations (code G) — required to control AuSn₄ intermetallic growth.
 - Microflex polymer terminations — preserves the polymer matrix.
 - Lead-free reflow of SMD stacks and large case sizes (≥ 2225).

Target oxygen level for N₂-protected reflow : ≤ 1000 ppm.

SOLDERING HEIGHT

Solder fillet height must comply with IPC-A-610 (Class 2 or 3 per application) :

- Minimum solder climb on the termination : 25% of chip thickness or 500 µm, whichever is less.
- Maximum solder climb : 100% of chip thickness, not exceeding the top metallization wrap.
- For SMD stacks and radial leaded parts, refer to the part-specific datasheet for recommended footprint dimensions and fillet geometry.

Excessive fillet height transmits PCB bending forces to the ceramic body and is the leading cause of in-service crack failures.

COOLING

After soldering, cool the assembly gradually to room temperature :

- Standard ramp-down rate : $\leq 6^{\circ}\text{C/s}$ for SnPb reflow, $\leq 4^{\circ}\text{C/s}$ for lead-free reflow.
- Fragile profile ramp-down rate : $\leq 2^{\circ}\text{C/s}$.
- Natural cooling in still air is recommended.
- Forced cooling, immediate fluid immersion, or direct contact with cold surfaces are prohibited — the resulting thermal shock causes ceramic and solder joint cracks.

CLEANING

When a cleaning step is used, all flux residues must be removed to prevent surface electrolytic corrosion. Compatible cleaning processes :

- Vapour-phase or spray cleaning with electronic-grade solvents (semi-aqueous, modified alcohol, or fluorinated).
- Ultrasonic cleaning is acceptable for chip MLCCs, but must be avoided for SMD stacks and radial leaded parts — mechanical resonance of the lead-frame or leadwires can fatigue the solder joint.
- Temperature differential between the assembly and the cleaning fluid : $\Delta T \leq 100^{\circ}\text{C}$.
- Immersion time ≤ 5 min for vapour solvents, ≤ 2 min for ultrasonic.

No-clean fluxes leave benign residues and do not require cleaning, provided the chosen flux is qualified for the application's reliability requirements.

SOLDERING CONDITIONS


| Product family | wave | Reflow standard | Reflow fragile | Hand soldering ¹ |
|---|----------------|-----------------|----------------|-----------------------------|
| Chip MLCC 0201, 0402, 0505, 0603 | ✓ | ✓ | | ✓ |
| Chip MLCC 0805, 1111, 1206, 1210 – $t < 1.25$ mm | ✓ | ✓ | | ✓ |
| Chip MLCC 0805, 1111, 1206, 1210 – $t \geq 1.25$ mm | | ✓ | | ✓ |
| Chip MLCC 1812, 2220 | | ✓ | recommended | ✓ |
| Chip MLCC ≥ 2225 (3640 to 80150) | | | required | with extreme care |
| EMI filters (≤ 2220) | | ✓ | | ✓ |
| High compact and SRMC/SRTV stacks ≤ 2220 | | ✓ | recommended | ✓ |
| SRMC/SRTV stacks > 2220 | | | required | with extreme care |
| Radial leaded (through-hole) | ✓ ² | | | ✓ ³ |

¹ Hand soldering is always a last resort; refer to the Hand soldering section.

² Wave possible only for standard radial sizes; preheat to within 100°C of wave temperature.


³ Mandatory part preheat to 150°C minimum; for HV radials, within 50°C of iron temperature.

WAVE SOLDERING PROFILE

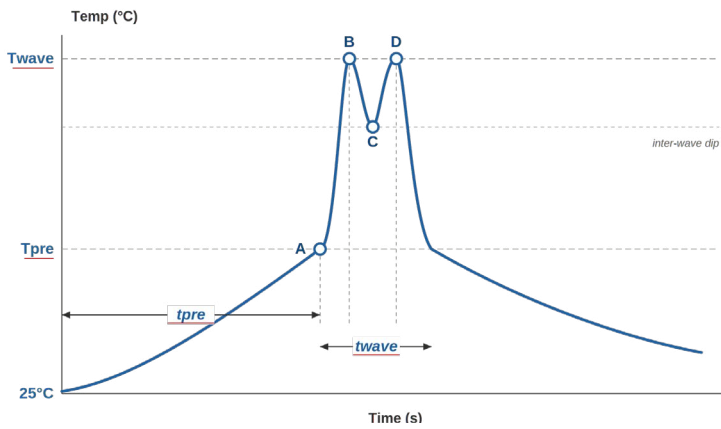


| Parameter | Standard |
|----------------------------------|---|
| Tpre (A) – bottom-side preheat | 100–130°C |
| Ramp-up to A | ≤ 3°C/s |
| tpre – preheat dwell | 60–120 s |
| Twave (B / D) – wave temperature | 235–260°C |
| Number of waves | 2 (turbulent + laminar) |
| Contact time per wave | 1–3 s |
| twave – total contact time | ≤ 10 s |
| Inter-wave dip (C) | ≥ 200°C |
| Ramp-down rate (forced air) | ≤ 4°C/s |
| Max passes | 2 |
| Atmosphere | N ₂ recommended for AgPd terminations |
| Note | Not applicable to fragile parts. Refer to reflow profile. |

LEADFREE REFLOW SOLDERING PROFILE (SAC305)

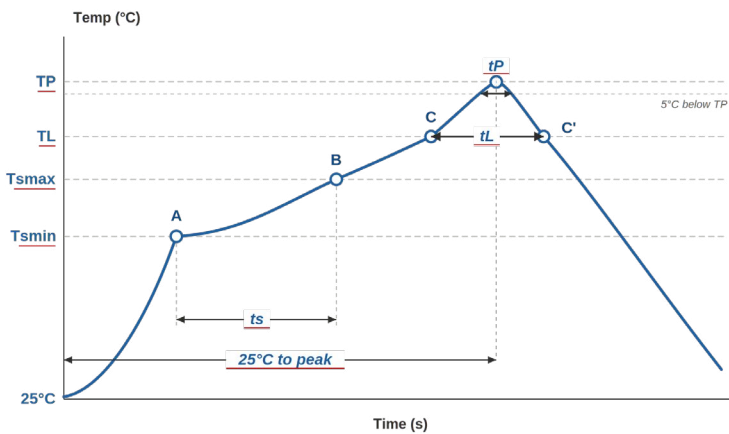


| Parameter | Standard | Fragile |
|-----------------------|-----------------------|----------------------------|
| Tsmmin (A) | 150°C | 150°C |
| Tsmmax (B) | 190°C | 190°C |
| ts (A→B) | 60–120 s | ≥ 120 s |
| Ramp-up rate | ≤ 3°C/s | ≤ 2°C/s |
| TL (C) | 217°C | 217°C |
| tL (C→C') | 40–90 s | 30–60 s |
| TP | 245°C max | 240°C max |
| tP (within 5°C of TP) | ≤ 10 s | ≤ 5 s |
| Ramp-down rate | ≤ 4°C/s | ≤ 2°C/s |
| 25°C to peak | ≤ 8 min | ≤ 8 min |
| Max reflow passes | 3 | 2 |
| Atmosphere | air or N ₂ | N ₂ recommended |

SNPB REFLOW SOLDERING PROFILE

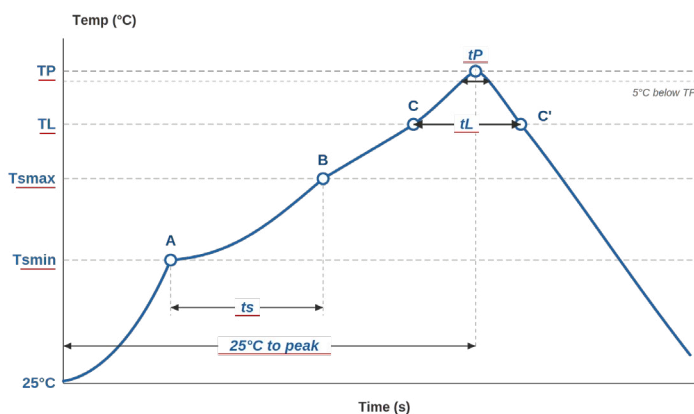

| Parameter | Standard | Fragile |
|-----------------------|-----------------------|----------------------------|
| Tsmmin (A) | 100°C | 100°C |
| Tsmmax (B) | 150°C | 150°C |
| ts (A→B) | 60–120 s | ≥ 120 s |
| Ramp-up rate | ≤ 3°C/s | ≤ 2°C/s |
| TL (C) | 183°C | 183°C |
| tL (C→C') | 60–90 s | 30–60 s |
| TP | 215°C max | 210°C max |
| tP (within 5°C of TP) | ≤ 10 s | ≤ 5 s |
| Ramp-down rate | ≤ 6°C/s | ≤ 2°C/s |
| 25°C to peak | ≤ 6 min | ≤ 6 min |
| Max reflow passes | 3 | 2 |
| Atmosphere | air or N ₂ | N ₂ recommended |

VAPOUR PHASE REFLOW PROFILE

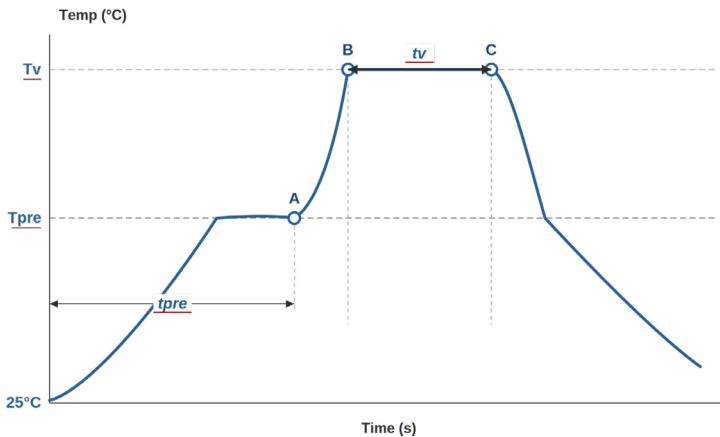

| Parameter | Standard | Fragile |
|--------------------------------|-----------------------------------|-----------------------------------|
| Tpre (A) – preheat plateau | 100–130°C | 100–130°C |
| Ramp-up to A | ≤ 3°C/s | ≤ 2°C/s |
| tpre – preheat dwell | 60–120 s | ≥ 120 s |
| Tv (B / C) – vapor temperature | 215°C (SnPb) or 230°C (SAC305) | 215°C (SnPb) or 230°C (SAC305) |
| tv (B→C) – time in vapor | 30–60 s | 30–45 s |
| Ramp-down rate (after C) | ≤ 4°C/s | ≤ 2°C/s |
| Max reflow passes | 3 | 2 |
| Atmosphere | process vapor (inert) | process vapor (inert) |

HAND SOLDERING

Hand soldering is not recommended; localized thermal shock can crack the ceramic body. Hot-air pencil reflow is preferred for rework. When a soldering iron must be used, observe the following procedure :

- Soldering iron tip diameter ≤ 3.0 mm; wattage ≤ 20 W.
- Pre-heat the component to 150°C minimum before iron contact.
- Iron tip temperature ≤ 280°C; contact time ≤ 5 s per termination.
- Pre-tin the iron tip with the required volume of solder; do not feed solder wire onto the part.
- Do not touch the ceramic body directly with the iron tip — apply heat to the termination metallization only.
- After soldering, allow the part to cool gradually at room temperature.
- Forced cooling is not allowed.

For fragile parts (SMD stacks > 2220, case sizes ≥ 2225, radial leaded HV, AgPd or gold terminations), additional precautions apply :

- Preheat the part to within 50°C of the iron tip temperature.
- Total iron contact time ≤ 3 s per termination.
- Single hand-soldering operation only; rework requires part replacement.

RADIAL LEADED SOLDERING

Through-hole radial leaded capacitors are soldered by wave or by hand. Reflow is not applicable to leaded parts — no surface pads are available for solder paste deposition.

For wave soldering of standard radial sizes :


- Preheat the PCB underside to within 100°C of the wave temperature.
- Wave temperature : 235–260°C; total contact time ≤ 10 s.
- Two waves (turbulent + laminar) typically applied.

For high-voltage radials and large lead diameters, wave soldering is **not recommended**. Use hand soldering with the procedure above, including :

- Part preheat to within 50°C of the iron tip temperature.
- Iron contact time ≤ 5 s per lead.
- Allow each lead to cool before soldering the next.


TYPICAL SMD FOOTPRINT WAVE SOLDERING

| SIZE | FOOTPRINT DIMENSIONS IN MM | | | | | |
|------|----------------------------|------|------|------|------|------|
| | A | B | C | D | E | F |
| 0603 | 2.40 | 1.00 | 0.70 | 1.00 | 3.10 | 1.40 |
| 0805 | 3.20 | 1.30 | 0.90 | 1.40 | 4.10 | 1.85 |
| 1206 | 4.80 | 1.80 | 1.25 | 2.30 | 5.90 | 2.25 |
| 1210 | 4.80 | 2.70 | 1.25 | 2.30 | 5.90 | 3.15 |

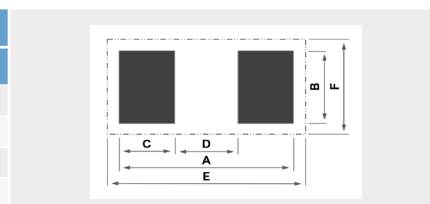


TYPICAL SMD FOOTPRINT REFLOW SOLDERING

| SIZE | FOOTPRINT DIMENSIONS IN mm | | | | | |
|-------------------|----------------------------|-------|------|-------|-------|-------|
| | A | B | C | D | E | F |
| 0201 | 1.00 | 0.40 | 0.30 | 0.40 | 1.25 | 0.85 |
| 0204 | 1.00 | 1.20 | 0.30 | 0.40 | 1.25 | 1.65 |
| 0402 | 1.50 | 0.60 | 0.40 | 0.70 | 1.75 | 1.05 |
| 0306 | 1.30 | 1.80 | 0.40 | 0.50 | 1.55 | 2.25 |
| 0404 | 1.50 | 1.20 | 0.40 | 0.70 | 1.75 | 1.65 |
| 0504 | 1.90 | 1.20 | 0.40 | 1.10 | 2.15 | 1.65 |
| 0505 | 1.90 | 1.50 | 0.50 | 0.90 | 2.15 | 1.95 |
| 0508 | 1.90 | 2.20 | 0.50 | 0.90 | 2.15 | 2.75 |
| 0603 | 2.30 | 1.00 | 0.60 | 1.10 | 2.55 | 1.55 |
| 0612 | 2.30 | 3.40 | 0.60 | 1.10 | 2.55 | 3.95 |
| 0805 | 2.90 | 1.45 | 0.90 | 1.10 | 3.15 | 2.00 |
| 1206 | 4.10 | 1.80 | 0.90 | 2.30 | 4.35 | 2.45 |
| 1210 | 4.10 | 2.70 | 1.00 | 2.10 | 4.35 | 3.35 |
| 1808 | 5.50 | 2.20 | 1.20 | 3.10 | 5.75 | 2.85 |
| 1812 | 5.50 | 3.40 | 1.20 | 3.10 | 5.75 | 4.05 |
| 1825 | 5.50 | 6.70 | 1.20 | 3.10 | 5.75 | 7.35 |
| 2211 | 6.80 | 3.00 | 1.40 | 4.00 | 7.05 | 3.65 |
| 2220 | 6.80 | 5.40 | 1.40 | 4.00 | 7.05 | 6.05 |
| 2225 | 6.80 | 6.70 | 1.65 | 3.50 | 7.05 | 7.50 |
| 2525 | 7.70 | 6.75 | 1.65 | 4.40 | 7.95 | 7.55 |
| 2825 | 8.40 | 6.70 | 1.65 | 5.10 | 8.65 | 7.50 |
| 3033 | 9.00 | 8.80 | 1.95 | 5.10 | 9.25 | 9.60 |
| 3640 | 11.60 | 4.60 | 2.35 | 6.90 | 11.85 | 5.40 |
| 4017 | 11.60 | 5.45 | 2.35 | 6.90 | 11.85 | 6.25 |
| 4020 | 11.60 | 10.70 | 2.35 | 6.90 | 11.85 | 11.50 |
| 4040 | 11.60 | 26.20 | 2.35 | 6.90 | 11.85 | 27.00 |
| 40100 | 15.50 | 13.20 | 2.35 | 10.80 | 15.75 | 14.00 |
| 5550 | 16.70 | 20.80 | 2.35 | 12.00 | 16.95 | 21.60 |
| 6080 | 18.30 | 15.70 | 2.35 | 13.60 | 18.55 | 16.50 |
| 6660 | 21.90 | 15.70 | 2.35 | 17.20 | 22.15 | 16.50 |
| 8060 | 21.90 | 38.90 | 2.35 | 17.20 | 22.15 | 39.70 |
| 80150 | 4.15 | 2.60 | 1.15 | 1.75 | 5.05 | 3.30 |
| HIGH COMPACT 1210 | 5.75 | 3.40 | 1.35 | 2.70 | 6.70 | 4.20 |
| HIGH COMPACT 1812 | 6.80 | 5.50 | 1.70 | 2.80 | 7.70 | 6.30 |
| HIGH COMPACT 2220 | 6.80 | 5.50 | 1.70 | 2.80 | 7.70 | 6.30 |

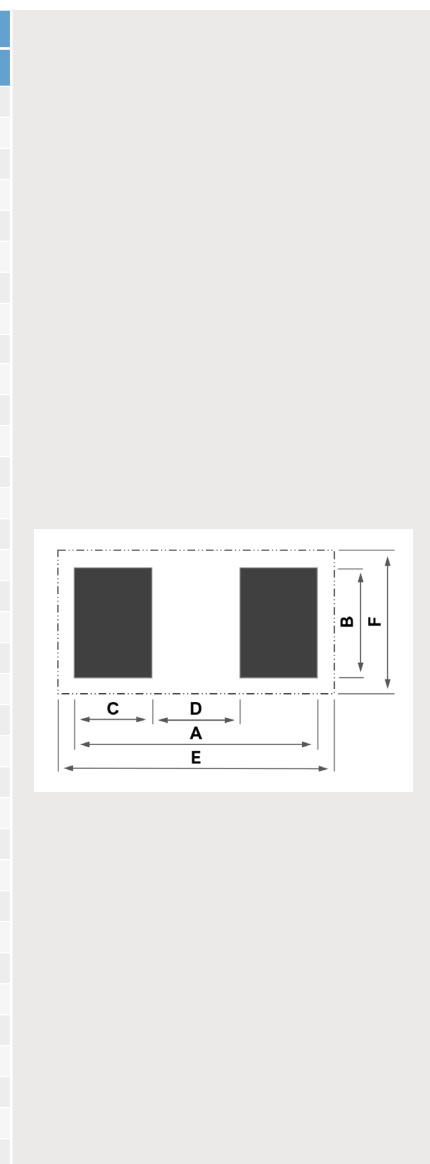

TYPICAL FILTER FOOTPRINT REFLOW SOLDERING

| SIZE | FOOTPRINT DIMENSIONS IN mm | | | | | | | |
|------|----------------------------|------|------|------|------|------|------|------|
| | A | B | C | D | G | H | I | J |
| 0603 | 2.30 | 1.00 | 0.55 | 1.20 | 0.60 | 0.30 | 1.40 | 0.60 |
| 0805 | 2.90 | 1.45 | 0.70 | 1.50 | 0.80 | 0.35 | 1.85 | 1.05 |
| 1206 | 4.10 | 1.80 | 0.95 | 2.20 | 1.00 | 0.60 | 2.20 | 1.40 |
| 1806 | 5.50 | 1.80 | 1.15 | 3.20 | 1.50 | 0.85 | 2.20 | 1.40 |
| 1812 | 5.50 | 3.40 | 1.15 | 3.20 | 1.50 | 0.85 | 3.90 | 3.00 |
| 2220 | 6.80 | 5.40 | 1.25 | 4.30 | 2.00 | 1.15 | 7.20 | 5.00 |

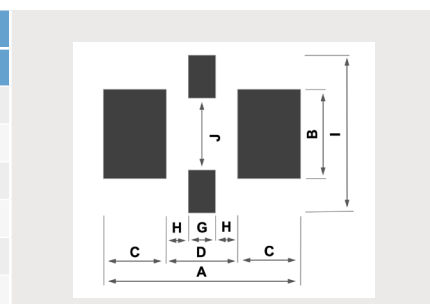

This document is subject to change without notice.

ORDERING INFORMATION

| SRMC | - | 0603 | Y | 102 | J | A | - | L | 040 | - | - | - | B | - |
|-------|---------------|----------|------------|---|-------------------|-------------|--|---------|--------|---------|-----------------------|----------|-----------------|------------------------|
| SERIE | HT | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINAISON | FORM | HEIGHT | LEADS | COATING/MARKING | CUR-RENT | PACKAGING | SPECIAL |
| - | - | 0201 | Q = High Q | Expressed in picofarads (pF) | A = ± 0.05pF/0.5% | V = 2.5V | X = Nickel Tin | - | - | - | - | - | B = Reel | - |
| FK | H = High Temp | 0204 | A = NP0 | | B = ± 0.1pF | Y = 4V | F = Palladium-Silver | J | 020 | - | - | - | V = Bulk | BM = BME |
| FH | | 0402 | P = N2T | The first two digits are significant, | C = ± 0.25pF | R = 6.3V | P = Polymer Tin (Flex) | L | 030 | 2 to 10 | I = Conformal-Coating | 1 | T = Tray | Dxx = Reliability spec |
| SREV | | 0303 | X = BX | | D = ± 0.5pF | Q = 10V | C = Copper Tin (Non magnetic) | D | 040 | B | H = Epoxy Coating | 2 | Package | |
| MCF | | 0306 | Y=X7R | the third digit gives the number of noughts | E = ± 0.1% | J = 16V | (Non magnetic) | M | 050 | | M = Marked | | W = Waffle Pack | Exx = Sorting spec |
| M2F | | 0404 | BY=2C1 | Example : 102 = 1 000pF | F = ± 1% | X = 25V | CP = Copper Polymer Tin (Non magnetic) | T = 2 | 070 | | R = Resistor | | | |
| MPF | | 0504 | S = X5R | | G = ± 2% | Z = 35V | HP = Dipped SnPb Polymer | leads | 080 | | | | | |
| SRMC | | 0505 | T = X7S | | J = ± 5% | A = 50V | H = Dipped SnPb | U = 4 | 090 | | | | | |
| SRHS | | 0508 | R = X6S | | K = ± 10% | U = 63V | S = Dipped SAC | leads | 100 | | | | | |
| SRHD | | 0603 | W = X7T | For special values R is used as decimal separator | M = ± 20% | B = 100V | SP = Polymer Dipped SAC | leads | 110 | | | | | |
| SRTV | | 0612 | U = Z5U | Example 12R7 = 12.7pF | Z = -20% +80% | N = 150V | I = Electrolytic SnPb | plain J | 120 | | | | | |
| SR | | 0805 | V = Y5V | Example 1340R0 = 1340pF | | C = 200V | IP = Polymer Electrolytical SnPb | Lead | 130 | | | | | |
| SA | | 1206 | | | | P = 250V | | | 140 | | | | | |
| SF | | 1210 | | | | D = 300V | | | 160 | | | | | |
| | | 1808 | | | | E = 500V | | | 180 | | | | | |
| | | 1812 | | | | F = 630V | | | | | | | | |
| | | 1825 | | | | G = 1000V | Q = Solderable Silver | | | | | | | |
| | | 2211 | | | | 1K2 = 1200V | - = Tin Plated Lead Frame | | | | | | | |
| | | 2220 | | | | 1K4 = 1400V | N = SnPb Plated Lea Frame | | | | | | | |
| | | 2225 | | | | O = 1500V | M = Microstrip | | | | | | | |
| | | 2325 | | | | 1K7 = 1700V | A = Axial Ribbon | | | | | | | |
| | | 2525 | | | | 1K8 = 1800V | R = Radial Ribbon | | | | | | | |
| | | 2825 | | | | H = 2000V | U = Axial Wire | | | | | | | |
| | | 3033 | | | | T = 2500V | V = Radial Wire | | | | | | | |
| | | 3640 | | | | I = 3000V | CM = Microstrip (Non magnetic) | | | | | | | |
| | | 4040 | | | | M = 3600V | CA = Axial Ribbon (Non magnetic) | | | | | | | |
| | | 40100 | | | | K = 4000V | CR = Radia Ribbon (Non magnetic) | | | | | | | |
| | | 5550 | | | | L = 5000V | CU = Axial Wire (Non magnetic) | | | | | | | |
| | | 6080 | | | | 6 = 6000V | CV = Radial Wire (Non magnetic) | | | | | | | |
| | | 6560 | | | | S = 7200V | | | | | | | | |
| | | 6660 | | | | 7K5 = 7500V | | | | | | | | |
| | | 7274 | | | | 8 = 8000V | | | | | | | | |
| | | 7565 | | | | 10 = 10000V | | | | | | | | |
| | | 8060 | | | | 12 = 12000V | | | | | | | | |
| | | 80150 | | | | 15 = 15000V | | | | | | | | |
| | | 15080 | | | | | | | | | | | | |
| | | 40 to 94 | | | | | | | | | | | | |

RELIABILITY/SCREENING LEVEL


| OPTIONAL CODE | TESTING DETAIL |
|---------------|--|
| D20 | Generic AECQ-200 |
| D55681 | DPA & 100% Burn-In Per Group A of MIL-PRF-55681 |
| D123 | Group A & B Per MIL-PRF-123 |
| D3009 | DPA & 100% Burn-In according to ECSS-3009 for space application |
| COTS1 | Class 1 COTS+ according to ECSS-Q-ST-60-13C-Rev1 |
| COTS2 | Class 2 COTS+ according to ECSS-Q-ST-60-13C-Rev1 |
| COTS3 | Class 3 COTS+ according to ECSS-Q-ST-60-13C-Rev1 |
| D03 | High Temperature application Burn-In 100% 125° 168H 2Un, 6.5% AQL |
| D05 | Burn-In 100% 125° 168H 2Un, less than 5% default allowed VRT CEI 68-2-14 10 cycles 0V -55°C/+125°C, less than 5% default allowed 20 pieces life test 125°C, 1.5Un, 1 default allowed |

SORTING


| OPTIONAL CODE | SORTING DETAIL |
|---------------|--|
| E01 | 2 cells sorting 0 to +2,5 & +2,5 to +5 (% or pF accoding to value) |
| E02 | 4 cells sorting -5 to -2,5 ; -2,5 to 0 ; 0 to +2,5 & +2,5 to 5 (% or pF accoding to value) |
| E21 | 2% cells |

PACKAGE DIMENSION AND QUANTITY

| SIZE | THICKNESS | PAPER TAPE | | PLASTIC TAPE | |
|-------------------|------------|------------|---------|--------------|-----------|
| | | 7 REEL | 13 REEL | 7' REEL | 13 REEL |
| 0201 | 0.3 ± 0.05 | 10 K | 50 K | | |
| 0402 | 0.5 ± 0.05 | 10 K | 50 K | | |
| 0504 | 0.6 ± 0.05 | | | 4K | 15K |
| | 0.9 ± 0.05 | | | 4K | 15K |
| 0603 | 0.7 ± 0.07 | 4K | | 4K | 15K |
| | 0.9 ± 0.07 | 4K | 15K | 4K | 15K |
| | 0.9 ± 0.07 | | | 4K | 15K |
| | 1.1 ± 0.07 | | | 4K | 15K |
| 0805 | 0.8 ± 0.07 | 4K | 15K | 4K | 15K |
| | 0.9 ± 0.07 | | | 4K | 10K |
| | 1.1 ± 0.07 | | | 3K | 10K |
| | 1.3 ± 0.07 | | | 3K | 10K |
| 1206 | 1.1 ± 0.1 | | | 3K | 10K |
| | 1.4 ± 0.1 | | | 3K | 8K |
| | 1.8 ± 0.1 | | | 2K | 8K |
| 1210 | 1.4 ± 0.1 | | | 3K | 8K |
| | 1.8 ± 0.1 | | | 1K | 6K |
| 1808 | 1.4 ± 0.1 | | | 3K | 8K |
| 1812 | 1.6 ± 0.1 | | | 2K | 8K |
| | 2.1 ± 0.1 | | | 1K | 6K |
| | 2.8 ± 0.1 | | | 1K | 6K |
| 2220 | 1.8 ± 0.1 | | | 1K | 6K |
| | 3.0 ± 0.1 | | | 0.5K | 2K |
| 2225 | 3.0 ± 0.1 | | | 0.5K | 2K |
| 3033 | 3.0 ± 0.1 | | | 0.5K | 2K |
| 3640 | 3.0 ± 0.1 | | | 0.5K | 2K |
| 5440 | 3.9 ± 0.1 | | | | 0.5K - 1K |
| HIGH COMPACT 1210 | | | | 1K | 6K |
| HIGH COMPACT 1812 | | | | 1K | 6K |
| HIGH COMPACT 2220 | | | | 0.5K | 2K |

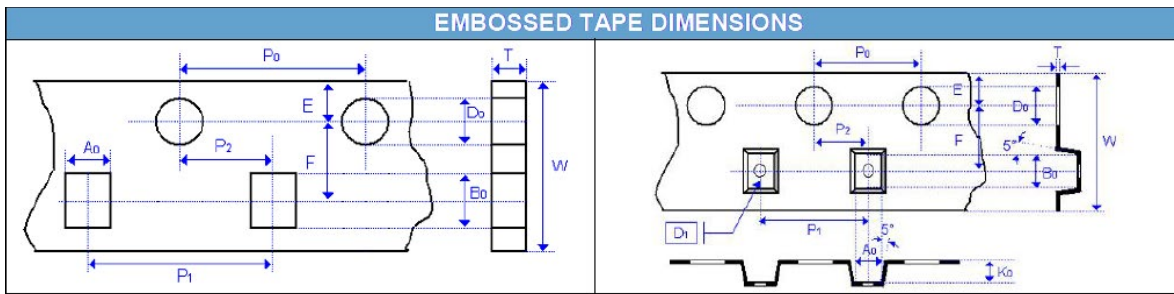

| REEL SIZE | 7 | 7 | 13 |
|-----------|-------------------|-------------------|-------------------|
| C | 13.0 +0.5/-0.2 | 13.0 +0.5/-0.2 | 13.0 +0.7/-0.3 |
| W1 | 8.4 +1.5/-0 | 12.4 +2.0/-0 | 8.4 +2.0/-0 |
| A | 178.0 ±0.10 | 178.0 ±0.10 | 330.0 ±1.0 |
| N | 60.0 ±1.0 | 80.0 ±1.0 | 100 ±1.0 |

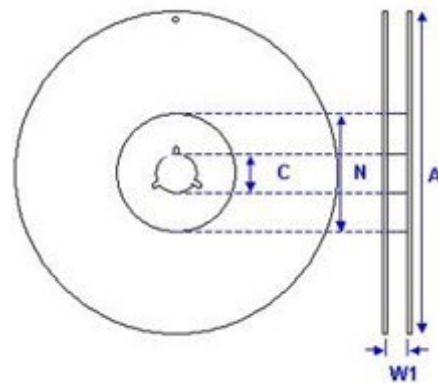

This document is subject to change without notice.

PRODUCTION CONTROL

Comparison of the Screening/Testing of the standard and High Reliability SRT-Microcéramique components

| | TEST/STRESS | STANDARD SMD | STACKS SRMC RADIALS | HIGH TEMPERATURE | IAW ESA-ESCC3009 | COTS1 | COTS2 | COTS3 | IAW MIL-PRF-55681 GROUP A | IAW MIL-PRF-123 GROUP A |
|---------------------|-----------------------------|------------------------------------|---|------------------------------|--|---|---|---|---|--|
| | CODE | | | D03 | D3009 | COTS1 | COTS2 | COTS3 | D55681 | D123 |
| | SCOPE | PME MLCC X7R, BX, NPO, N2T, High Q | Encapsulated, Dipped radial and Stacks SRMC | Type 1, Type 2 Chips | SRT PME BME, Radials, Stacks, X7R, BX, N2T, NPO, High Q | Class 1 BME Chips | Class 2 BME Chips | Class 3 BME Chips | SRT PME BME X7R, NPO, BX, N2T, High Q | SRT PME BME X7R, BX, NPO, N2T, High Q |
| PROCESS / SCREENING | Burn-In | | 100% Chips 24H +Stack 48H Tmax 2Un PDA 6.5% | 100% 168H Tmax 2Un PDA 6.5% | 100% 96H Tmax 2Un PDA 5% | 100% 96H Tmax 2Un PDA 5% | 100% 96H Tmax 2Un PDA 5% for non AEC-Q200 | 100% 96H Tmax 2Un PDA 5% for non AEC-Q200 | 100% 100H Min Tmax 2Un PDA 8% | 100% 168H Min 0.1%/1pc last 48H 125°C 2Un PDA 5% |
| | Capa, DF, IR, VP (25°C) | 100% | 100% | 100% | 100% | 100% | 100% | 100% | 100% | 100% |
| | IR (125°C) | | | | | | | | Sample | Sample |
| | Voltage Breakdown | 10 pcs/lot | 10 pcs/lot | 10 pcs/lot | 10 pcs/lot | 10 pcs/lot | 10 pcs/lot | 10 pcs/lot | 10 pcs/lot | 10 pcs/lot |
| | Dimension | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot |
| | DPA | per lot | per lot | per lot | per lot | per lot | per lot | per lot | per lot | per lot |
| | Visual | 100% | 100% | 100% | 100% | 100% | 100% | 100% | 100% | 100% |
| | Solderability | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot |
| | Leaching | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 6 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot |
| | Termination thickness | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot | 5 pcs/lot |
| TC | per ceramic lot | per ceramic lot | per ceramic lot | per ceramic lot | per ceramic lot and in LAT | in LAT | in LAT | in LAT | per ceramic lot | per ceramic lot |
| LAT | On request | On request | On request | On request | Flying Part | Flying part | Flying part | Flying part | On request | On request |
| LAT SUBGROUP 1 | Mounting | | | | 20 serialized pcs on PCB | | | | | |
| | Thermal Shock | | | | 10 Cycles 30mn/1mn | | | | | |
| | Humidity | | | | For Un<500V 1000h 85/85 | | | | | |
| Criteria | | | | No visual/electrical default | | | | | | |
| LAT SUBGROUP 2A | Mounting | | | | 20 serialized pcs on PCB | 20 serialized pcs on PCB | 20 serialized pcs on PCB | 20 serialized pcs on PCB | 20 serialized pcs on PCB for non AEC-Q200 | |
| | Operationnal Life | | | | 1000h ±24 125°C 2Un Un=500V 1.5Un Un=500V 1.3Un 500V<Un≤1250V 1Un Un>1250V | 1000h ±24 max T° 2Un Un=500V 1.5Un Un=500V 1.3Un 500V<Un≤1250V 1Un Un>1250V | 1000h ±24 max T° 2Un Un=500V 1.5Un Un=500V 1.3Un 500V<Un≤1250V 1Un Un>1250V | 1000h ±24 Max T° 2Un Un=500V 1.5Un Un=500V 1.3Un 500V<Un≤1250V 1Un Un>1250V | | |
| | Criteria | | | | No visual/electrical default | No visual/electrical default | No visual/electrical default | No visual/electrical default | | |
| LAT SUBGROUP 2B | Mounting | | | | 6 serialized pcs on PCB | 6 serialized pcs on PCB non AEC-Q200 | | | | |
| | TC | | | | IR at 125°C Cp at -55°C/20°C+125°C | IR at 125°C Cp at -55°C/20°C+125°C | | | | |
| | Shear Test | | | | 5N 10s | 5N 10s | | | | |
| | Criteria | | | | No visual/electrical default | No visual/electrical default | | | | |
| LAT SUBGROUP 3 | Mounting | | | | 6 pcs serialized | 6 pcs serialized | | | | |
| | Solderability | | | | Solder bath 235°C 5s included in screening | Solder bath 235°C 5s included in screening | | | | |
| | Permanence of Marking | | | | ESCC24800 when applicable | ESCC24800 when applicable | | | | |
| | Criteria | | | | No visual/electrical default | No visual/electrical default | | | | |
| | Thermal Cycle (optional) | | | | | | | | | |
| | Ultrasonic, Xray (optional) | | | | | | | | | |

- All components components can be proposed with SbPb termination (electrolytical I or Dipped H) with 5% min Pb for whisker mitigation
- Standard NiSn Termination is qualified according to JDEC JESD201A regarding whisker mitigation
- Other termination available Silver Palladium F, Solderable Silver Q, Thick Gold G, Flash Gold W, Non Magnetic Copper C, Polymer option P
- ECSS COTS framework is used to propose space ready components Class 1 to 3 based on SRT or customer chosen BME chips either AEC-Q200 (preferred) or non AEC-Q200. Size can start from 0201 and resistors can also be proposed and termination be changed.
- Specific High Reliability programs can be established to fit customer requirement for medical, defense, space, high stress applications.

This document is subject to change without notice.

RELIABILITY PRINCIPLES OVERVIEW GENERAL PRODUCTION

In order to guarantee highly reliable products to their customers, SRT-Microcéramique follows a strict quality policy which is explained below :

- According to AECQ philosophy, each component belongs to a family, which most restrictive members (four corners) have been fully qualified.
- PME components are produced in our Vendôme facility, with very stable process and equipments, in order to ensure Reliability and reproductibility.
- Reliability is based on batch tests, new product or equipment-specific qualifications and periodic requalifications.
- In addition to those regular tests, our quality departement launches regular accelerated tests to further deepens our reliability datas.
- Tests and qualifications of our standard products are based on AECQ methodology and are qualified according to the following limits.
- In accordance to AECQ methodology, specifics tests and limits can be adapted to fit our clients' needs.
- A whole range of stricter reliability tests can be offered for high Reliability products (burn-in, shocks, pulses...) for medical, space and defense applications.
- Based on our reliability database, FIT datas can be provided if necessary.

PRODUCTION CONTROL

Test conducted on each lot according to AECQ-200 framework

| FREQUENCY | TEST/STRESS | REFERENCE | AEC-Q | DETAIL |
|---------------|-------------------------|---------------------|-------------|------------------------------|
| 100% | Capa, DF, IR | CECC-32100-4.6 | | according to datasheet |
| 100% | Visual | CECC-32100-4.5 | AEC-Q200-9 | no visual defects |
| 50/lot | DPA | SRT QC1302 | AEC-Q200-5 | internal component integrity |
| 5/lot | Dimension | CECC-32100-4.5 | AEC-Q200-5 | according to datasheet |
| 5/lot | Solderability | CECC-32100-4.11 | AEC-Q200-18 | 0 fail |
| 5/lot | Leaching | SRT QC1105 | | 0 fail |
| 5/lot | Termination Thickness | SRT QC1108 | | 0 fail |
| 10/lot | Voltage Breakdown | CECC-32100-4.6.4 | | 0 fail |
| 1/ceramic lot | Temperature coefficient | CECC 32100-Prgph4,7 | | according to datasheet |

QUALIFICATIONS

Each component family has been qualified according to CECC and AECQ tests methodology, which are renewed on a periodic basis.

| FREQUENCY | TEST/STRESS | REFERENCE | AEC-Q | DETAIL |
|-----------|-----------------------------|------------------------------------|-------------|--|
| Qualif | Electrical Characterization | CECC-32100-4.6 4.7 | AEC-Q200-19 | measure before test according to datasheet and after test according to post environmental limits |
| Qualif | Temperature Cycling | JESD22 Method-JA method 104 | AEC-Q200-4 | 1,000 cycles -55°C to +125°C Measurement at 24 ± 2 hours after test conclusion |
| Qualif | Biased Humidity | MIL-STD-202 Method 103 | AEC-Q200-7 | 1,000 hours 85°C/85%RH. Rated voltage. Measurement at 24 ± 2 hours after test conclusion |
| Qualif | Operational Life | MIL-STD-202 Method 108 condition D | AEC-Q200-8 | 1,000 hours at 125°C with applied Voltage : 2xRV RV≤500V, 1.2xRV 500V<RV≤1250V, RV RV>1250V |
| Qualif | Terminal Strength | CECC-32100-4.8 | AEC-Q200-6 | 1.8kg 60 seconds |
| Qualif | Vibration | MIL-STD-202 Method 204 | AEC-Q200-14 | 5g 20min 12cycles 3 orientations 10-2000Hz |
| Qualif | Board Flex | CEC 32100-4.9 | AEC-Q200-21 | 3mm Type 1, 2mm Type 2, Measurement at 24 ± 2 hours after test conclusion |

POST ENVIRONMENTAL STRESS LIMIT

| DIELECTRIC | DISSIPATION FACTOR (MAXIMUM) | CAPACITANCE SHIFT | INSULATION RESISTANCE |
|------------|------------------------------|-------------------|-----------------------|
| NPO | ≤ 4 10 ⁻³ | ±2% | 10% initial limit |
| N2T | ≤ 6 10 ⁻³ | ±4% | 10% initial limit |
| X7R | ≤ 0.035 | ±15% | 10% initial limit |

This document is subject to change without notice.

SPACE LEVEL COMPONENT SCREENED AND QUALIFIED ACCORDING TO ESCC-3009

SRT-Microcéramique can propose a wide range of BME and PME component from its catalog qualified and tested according to ESCC-3009 Revision 5 specifications for space applications. Both for development en evaluation and flight ready with full lot validation and ESCC standard documentation. Specific qualification programmes can be included to meet final customer requirement.

SRT manufactured PME with standard production control or requalified source BME components directly or after termination change or mounting enter the following screening process :

SCREENING D3009

| FREQUENCY | TEST/STRESS | REFERENCE | DETAIL |
|-----------|------------------------------------|---|---|
| 100% | Voltage conditioning | IEC Publication No. 60384-1 clause 4.23 | 100% 96H Tmax 2Un PDA 5% |
| 100% | Capa, DF, IR, VP (25°C) | ESCC3009 Chart F3 | According to datasheet |
| 5/Lot | High and Low Temperatures Electri- | ESCC3009 Chart F3 | According to datasheet, 0 fail or 100% |
| 5/lot | Dimension | ESCC Basic Specification No. 20500 | According to datasheet (done in manufacturing, requalification process) |
| 5/lot | DPA | ESCC Basic Specification No. 23400 | Internal component integrity |
| 100% | Visual | ESCC Basic Specification Nos. 20400 and 20500 | No defect |
| 5/lot | Solderability | IEC Publication No. 60068-2-58 | 0 fail |

LOT VALIDATION D3009

| GROUP | NB PCS | TEST/STRESS | REFERENCE | DETAIL |
|-------------|--------|-----------------------|---|---|
| SUBGROUP 1 | 20 | Mounting | ESCC3009 8.6 | 20 serialized pcs on PCB |
| | | Thermal Shock | ESCC3009 8.7, IEC No. 60068-2-14 | 10 Cycles 30mn/1mn |
| | | Humidity | ESCC3009 8.2 | For Un<500V 1000h 85/85 Un≥500V not applicable |
| | | Criteria | ESCC3009 | No visual/electrical default |
| SUBGROUP 2A | 40 | Mounting | ESCC3009 8.6 | 40 serialized pcs on PCB |
| | | Operational Life | ESCC3009 Chart F4, IEC No. 60384-1 clause 4.23. | 1000h ±24 125°C (optional 2000h) 2U U<500V 1.5U 500≤U<1000 1.2U 1000≤U≤2000 1U U>2000 |
| | | Criteria | ESCC3009 | No visual/electrical default |
| SUBGROUP 2B | 6 | Mounting | ESCC3009 8.6 | 6 serialized pcs on PCB |
| | | TC | ESCC3009 8.10 | IR at 125°C, CP at -55°C/25°C/125°C |
| | | Shear Test | ESCC3009 8.7, IEC No. 60384-1 | 5N 10s |
| | | Criteria | ESCC3009 | No visual/electrical default |
| SUBGROUP 3 | 6 | Solderability | ESCC3009 8.11, IEC No. 60068-2-58 | Solder bath 235°C 5s included in screening |
| | | Permanence of Marking | ESCC3009 8.12 | ESCC24800 when applicable |
| | | Criteria | ESCC3009 | No visual/electrical default |

LAT3=LVT3 = Subgroup 3/LAT2=LVT2 = Subgroup 2A + Subgroup 2B + Subgroup 3/LAT1=LVT1 = Subgroup 1 + Subgroup 2A + Subgroup 2B + Subgroup 3

SPACE LEVEL COMPONENT SCREENED ACCORDING TO COTS+ ECSS-Q-ST-60-13C-REV1

SRT-Microcéramique can apply the COTS+ qualification framework to any suitable component AEQ-200 or not, with or without termination change, to make them fly ready, offering a wide range of possibilities at competitive cost, either in Class 1 (COTS1), Class 2 (COTS2) or Class 3 (COTS3).

EVALUATION/SCREENING/LAT COTS1/COTS2/COTS3

Class 1 (COTS1), Class 2 (COTS2), Class 3 (COTS3)


| AECQ-200 | CLASS 1 | CLASS 2 | CLASS 3 | CATEGORY | TEST TYPE | SAMPLE | PROCEDURE |
|----------|---------|---------|---------|------------|------------------------------|--------|--------------------|
| Yes | X | X | X | Evaluation | Construction Analysis | 5 | ESCC21001 |
| Yes | X | X | X | Evaluation | Temperature characterization | 5 | ESCC3009 8.10 |
| Yes | X | | | Evaluation | Life Test 2000h | 40 | ESCC3009 8.6 + 8.9 |
| Yes | X | | | Screening | Complete screening | 100% | ESCC3009 chart F3 |
| Yes | X | X | X | LAT | DPA | 3 | ESCC21001 |
| Yes | X | X | | LAT | Life Test 1000h | 20 | ESCC3009 8.6 + 8.9 |
| No | X | X | X | Evaluation | Construction Analysis | 5 | ESCC21001 |
| No | X | X | X | Evaluation | Temperature characterization | 5 | ESCC 3009 8.10 |
| No | X | X | | Evaluation | Complete evaluation | 72 | ESCC 3009 chart F4 |
| No | | | X | Evaluation | Life Test 1000h | 40 | ESCC3009 8.6 + 8.9 |
| No | X | X | X | Screening | Complete screening | 100% | ESCC3009 chart F3 |
| No | X | X | X | LAT | DPA | 3 | ESCC21001 |
| No | X | | | LAT | Complete LAT | 52 | ESCC 3009 chart F4 |
| No | | X | X | LAT | Life Test 1000h | 20 | ESCC3009 8.6 + 8.9 |

TINNING


All component for space application can be proposed with dipped SnPb termination (Sn62 Pb36 Ag2) or SAC 305 (Sn96.5 Ag3 Cu0.5) for maximum reliability and whiskers avoidance.

This document is subject to change without notice.


PME (Precious Metal Electrodes)

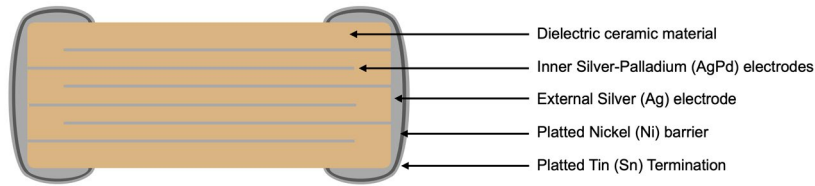


PME (Precious Metal Electrodes) Polymer Soft Termination

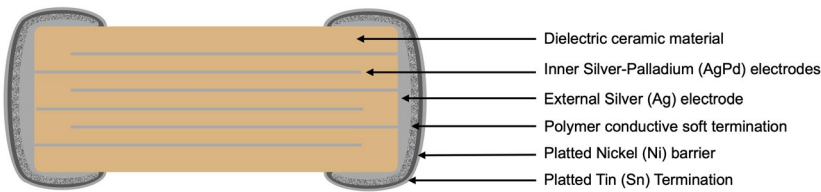


PME (Precious Metal Electrodes) Non Magnetic

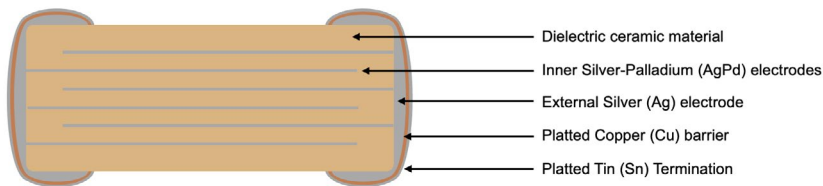

BME (Basis Metal Electrodes) code BM

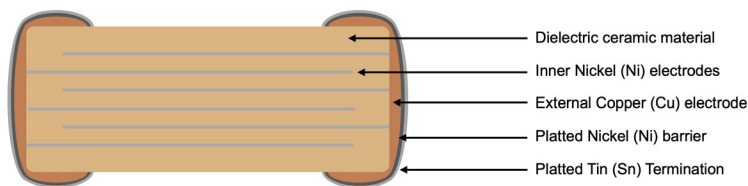

BME (Basis Metal Electrodes) code BM Polymer Soft Termination

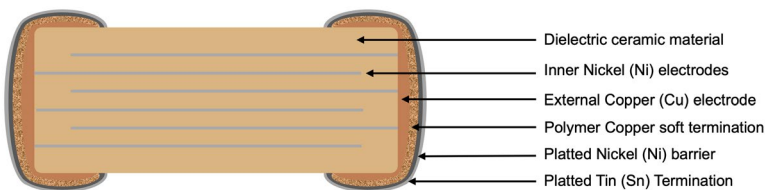

REACH Compliance

- SRT-Microcéramique delivers non-chemical articles only.
- These contain no substances which are intended to be released under normal or reasonably foreseeable conditions of use according to Reach article 7(1).

SRT-Microcéramique confirms hereby that our products contain none of the substances which are listed in the present candidate list of the European Chemicals Agency (ECHA), above a concentration of 0.1% by weight of the whole component.

Candidate list of substances (European Chemicals Agency ECHA) :
<http://echa.europa.eu/fr/candidate-list-table>

ROHS COMPLIANCE

SRT-Microcéramique herewith confirms that RoHS-compliant SRT-microcéramique products are conforming to the following EU directives:
EU directive 2015/863/EU EU directive 2011/65/EU EU directive 2003/11/EC

Following restricted materials are not used and do not exceed the legal limits: Lead (Pb, see exemptions),

- Mercury (Hg)
- Cadmium (Cd)
- Chromium (Cr VI)
- Polybrominated biphenyls (PBB) Polybrominated diphenyl ethers (PBDE) Bis(2-Ethylhexyl) phthalate (DEHP) Benzyl butyl phthalate (BBP)
- Dibutyl phthalate (DBP) Diisobutyl phthalate (DIBP)

Exemptions: The following exemptions according to the RoHS annexe are applicable:

Identity 7(a) :

- Lead in high melting temperature type solders (i.e lead-based alloys containing 85% by weight or more lead).

Identity 7(c)-I :

- Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.

The components are suitable for a lead-free process according to EN 60068-2-58 and in accordance with the IPC/JEDEC standard J-Std-020D. The lead free process has been tested using solder alloy Sn96.5Ag3Cu0.5

Export controls and dual-use regulations

Some SRT-Microcéramique components fall under 'dual-use' items under international export controls definition - those that can be used for civil or military purposes which meet certain specified technical standards.

The defining criteria for a dual use component is one with a voltage rating of >750Vdc and a capacitance value of >250nF when measured at 750Vdc and a series inductance <10nH. Components defined as dual-use under the above criteria may require a licence for export across international borders. Please contact us for further information on specific part numbers.

ISO9001:2015

In their design, research and development as well as the manufacturing of MLCC capacitors, customer service and distribution SRT-Microcéramique uses and maintains a Management System audited and certified in accordance to : **ISO9001:2015**

You may contact us for any inquiry regarding the regulations and compliance listed above.

SMD Low Voltage Class I


10V - 1000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : timing, precision circuitry, filtering



RoHS compliant

FEATURES

- Ultra stable temperature compensating classe I ceramic
- Custom voltage, package size, capacitance value on request
- Tested in accordance to CECC 32100 and AEC-Q200
- CECC 30600 et NFC 83-131 compliant
- Available in stack or radial
- Wide range of termination
- All PME SMD available in non magnetic

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
± 30ppm with 0Vdc applied

DISSIPATION FACTOR :
≤ 1.10-3 at 1Vrms and 1MHz for values ≤ 1000pF
≤ 1.10-3 at 1Vrms and 1KHz for values > 1000pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0201 | 0402 | 0504 | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 5440 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Min | 0.1 pF | 0.1 pF | 0.1 pF | 0.1 pF | 0.1 pF | 0.4 pF | 0.4 pF | 1.0 pF | 1.0 pF | 1.0 pF | 1.0 pF | 1.0 pF | 4.7 pF | 10 pF | 10 pF | 10 pF | 10 pF |
| 10V | 1.0 nF | 10 nF | 1.5 nF | 15 nF | 47 nF | 470 nF | 470 nF | 22 nF | 220 nF | 100 nF | 470 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 25V | 1.0 nF | 8.2 nF | 1.5 nF | 15 nF | 47 nF | 470 nF | 220 nF | 22 nF | 220 nF | 100 nF | 470 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 50V | 1.0 nF | 8.2 nF | 1.5 nF | 10 nF | 47 nF | 220 nF | 100 nF | 22 nF | 220 nF | 100 nF | 470 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 63V | 100 pF | 1.0 nF | 1.5 nF | 10 nF | 39 nF | 100 nF | 100 nF | 22 nF | 150 nF | 100 nF | 330 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 100V | 100 pF | 1.0 nF | 1.5 nF | 10 nF | 39 nF | 100 nF | 100 nF | 22 nF | 150 nF | 100 nF | 330 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 200V | | 330 pF | 1.2 nF | 2.2 nF | 10 nF | 22 nF | 47 nF | 22 nF | 100 nF | 100 nF | 150 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 250V | | 330 pF | 1.2 nF | 2.2 nF | 10 nF | 22 nF | 47 nF | 22 nF | 100 nF | 100 nF | 150 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 500V | | 180 pF | 1.0 nF | 1.0 nF | 3.3 nF | 8.2 nF | 15 nF | 18 nF | 47 nF | 100 nF | 100 nF | 82 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF |
| 630V | | | | | 560 pF | 2.2 nF | 6.8 nF | 12 nF | 15 nF | 47 nF | 56 nF | 68 nF | 82 nF | 120 nF | 180 nF | 220 nF | 270 nF |
| 1000V | | | | | 220 pF | 820 pF | 2.7 nF | 6.8 nF | 6.8 nF | 15 nF | 33 nF | 100 nF | 47 nF | 56 nF | 82 nF | 120 nF | 180 nF |

Max values italic obtained with BME parts

ORDERING INFORMATION


| 0603 | A | 101 | J | B | X | B | - |
|--|------------|--|---|--|---|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0201 0402 0504 0603 0805 1206 1210 1808 1812 1825 2220 2225 2825 3033 3640 4040 5440 | A = NPO | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0,5% if > 10pF and ±0,05pF if < 10pF B = ± 0.1pF C = ± 0,25pF D = ± 0,5pF E = 0.1% F = ± 1% G = ± 2% J = ± 5% K = ± 10% | Q = 10V J = 16V X = 25V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V F = 630V G = 1000V | X = Nickel Tin F = Palladium-Silver P = Polymer Tin (Flex) C = Copper Tin (Non magnetic) W = Nickel Gold H = Dipped SnPb I = Electrolytic SnPb Q = Solderable Silver | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec D20 = AECQ-200 |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS

| | 0201 | 0402 | 0504 | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 5440 |
|------------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Length (L) | 0.60 ± 0.03 | 1.00 ± 0.1 | 1.25 ± 0.1 | 1.60 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 4.60 ± 0.3 | 4.60 ± 0.4 | 5.60 ± 0.4 | 5.60 ± 0.4 | 7.10 ± 0.4 | 7.60 ± 0.4 | 9.15 ± 0.8 | 10.20 ± 0.8 | 13.70 ± 1.0 |
| Width (W) | 0.30 ± 0.03 | 0.50 ± 0.1 | 1.00 ± 0.1 | 0.80 ± 0.2 | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 8.40 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 |
| Thickness max(T) | 0.35 | 0.60 | 1.00 | 0.92 | 1.40 | 1.70 | 2.50 | 2.20 | 3.30 | 3.60 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| Termination (P) | Min Max | 0.10 0.20 | 0.10 0.40 | 0.10 0.40 | 0.25 0.70 | 0.25 0.70 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 1.00 | 0.25 1.00 | 0.25 1.20 | 0.50 1.50 | 0.80 1.50 | 0.80 1.50 |

For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W)



This document is subject to change without notice.



STANDARD SIZE : 0201 to 1808

| SIZE | 0201 | | 0402 | | | | 0504 | | | | 0603 | | | | 0805 | | | | 1206 | | | | 1210 | | | | 1808 | | | |
|------|--------|-----|------|-----|------|-----|------|------|------|------|------|-----|------|------|------|-------|-----|-----|------|------|------|-------|------|-----|------|------|------|-------|--|--|
| | CODE | CAP | 10V | 50V | 100V | 25V | 50V | 100V | 250V | 500V | 25V | 50V | 100V | 250V | 500V | 1000V | 25V | 50V | 100V | 250V | 500V | 1000V | 25V | 50V | 100V | 250V | 500V | 1000V | | |
| 0R1 | 0.1 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0R3 | 0.3 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0R5 | 0.5 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0R8 | 0.8 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1R0 | 1.0 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1R2 | 1.2 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1R5 | 1.5 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1R8 | 1.8 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2R2 | 2.2 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2R7 | 2.7 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3R3 | 3.3 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3R9 | 3.9 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4R7 | 4.7 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5R6 | 5.6 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6R8 | 6.8 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8R2 | 8.2 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100 | 10 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 120 | 12 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 | 15 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 180 | 18 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 220 | 22 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 270 | 27 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 330 | 33 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 390 | 39 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 470 | 47 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 560 | 56 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 680 | 68 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 820 | 82 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 101 | 100 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 121 | 120 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 151 | 150 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 181 | 180 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 221 | 220 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 271 | 270 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 331 | 330 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 391 | 390 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 471 | 470 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 561 | 560 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 681 | 680 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 821 | 820 pF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 102 | 1.0 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 122 | 1.2 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 152 | 1.5 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 182 | 1.8 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 222 | 2.2 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 272 | 2.7 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 332 | 3.3 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 392 | 3.9 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 472 | 4.7 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 562 | 5.6 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 682 | 6.8 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 822 | 8.2 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 103 | 10 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 123 | 12 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 153 | 15 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 183 | 18 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 223 | 22 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 273 | 27 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 333 | 33 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 393 | 39 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 473 | 47 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 563 | 56 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 683 | 68 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 823 | 82 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 104 | 100 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 124 | 120 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 154 | 150 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 184 | 180 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 224 | 220 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 274 | 270 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 334 | 330 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 394 | 390 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 474 | 470 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 564 | 560 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 684 | 680 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |
| 824 | 820 nF | ● | ● | ● | ● | | | | | | | | | | | | | | | | | | | | | | | | | |

● BME parts (AEC-Q200) ● BME parts (Industrial)


This document is subject to change without notice.






TYPICAL CHARACTERISTICS


NPO Temperature coefficient of capacitance

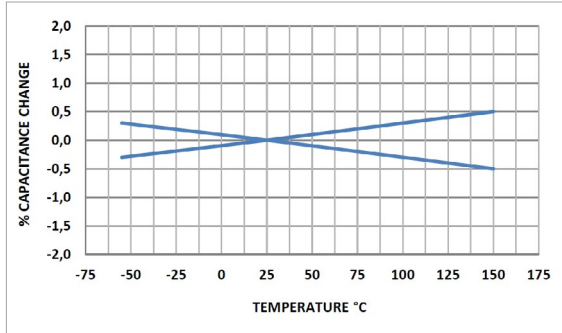


NPO Insulation resistance vs. temperature

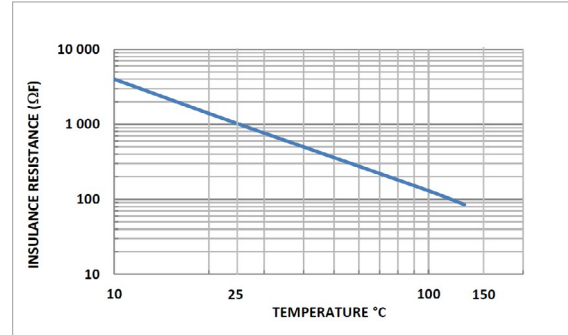


NPO Aging rate

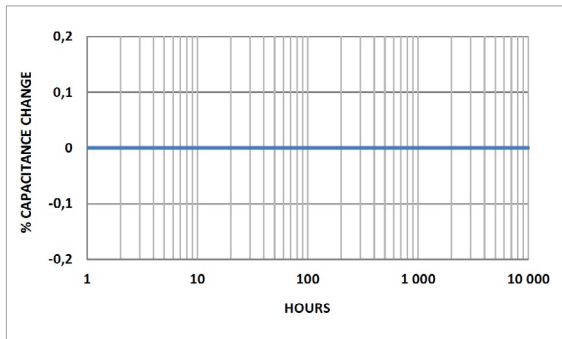


NPO Voltage coefficient of capacitance

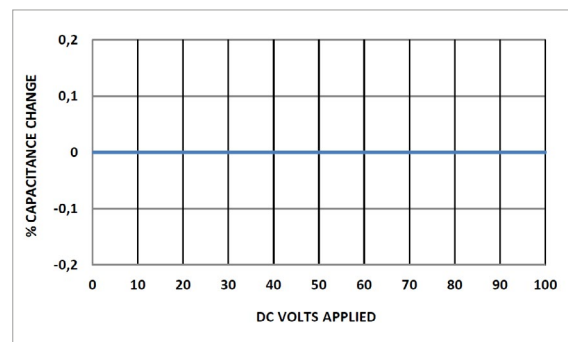

NPO Change of Capacitance with Frequency

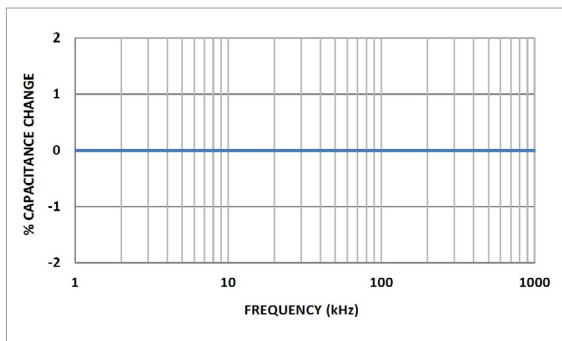

NPO Dissipation factor vs. frequency

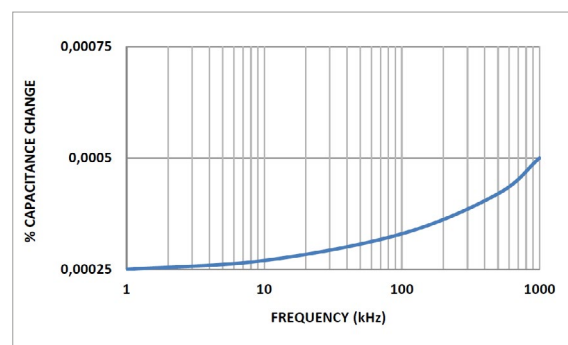

SMD Low Voltage N2T


10V - 1000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : timing, filtering, pulse discharge



FEATURES

- Class 1
- Close to Class 2 volumetric capacitance, high power
- No piezo electric effect, high current pulse discharge
- Custom voltage, package size, capacitance value on request
- Available in stack or radial
- Wide range of termination
- All PME SMD available in non magnetic termination

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
-2200 ± 350 ppm/C° with 0Vdc applied

DISSIPATION FACTOR :
≤ 1.10-3 at 1Vrms and 1MHz for values ≤ 100pF
≤ 1.10-3 at 1Vrms and 1KHz for values > 100pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0402 | 0504 | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 5440 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| Min | 0.3 pF | 0.3 pF | 0.3 pF | 1.0 pF | 4.7 pF | 4.7 pF | 4.7 pF | 4.7 pF | 10 pF | 10 pF | 10 pF | 10 pF | 47 pF | 47 pF | 47 pF | 47 pF |
| 10V | 1.2 nF | 39 nF | 1.5 nF | 15 nF | 220 nF | 15 nF | 82 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 120 nF | 680 nF | 820 nF | 5.6 μF | 330 nF |
| 25V | 1.2 nF | 39 nF | 1.5 nF | 15 nF | 220 nF | 15 nF | 82 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 120 nF | 680 nF | 820 nF | 5.6 μF | 330 nF |
| 50V | 1.2 nF | 39 nF | 1.2 nF | 15 nF | 220 nF | 15 nF | 82 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 120 nF | 680 nF | 820 nF | 5.6 μF | 330 nF |
| 63V | 1.2 nF | 39 nF | 1.2 nF | 15 nF | 220 nF | 15 nF | 82 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 120 nF | 680 nF | 820 nF | 5.6 μF | 330 nF |
| 100V | 1.2 nF | 39 nF | 1.2 nF | 15 nF | 220 nF | 15 nF | 82 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 120 nF | 680 nF | 820 nF | 5.6 μF | 330 nF |
| 200V | 1.0 nF | 39 nF | 1.2 nF | 15 nF | 220 nF | 15 nF | 82 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 120 nF | 680 nF | 820 nF | 5.6 μF | 330 nF |
| 250V | 1.0 nF | 33 nF | 1.2 nF | 15 nF | 220 nF | 15 nF | 82 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 120 nF | 680 nF | 820 nF | 5.6 μF | 330 nF |
| 500V | 330 pF | 6.8 nF | 1.0 nF | 6.8 nF | 82 nF | 15 nF | 47 nF | 330 nF | 68 nF | 180 nF | 1.0 μF | 120 nF | 390 nF | 560 nF | 2.7 μF | 330 nF |
| 630V | | | 560 pF | 4.7 nF | 47 nF | 12 nF | 39 nF | 270 nF | 56 nF | 150 nF | 820 nF | 82 nF | 330 nF | 470 nF | 2.2 μF | 270 nF |
| 1000V | | | 220 pF | 1.8 nF | 15 nF | 6.8 nF | 15 nF | 120 nF | 33 nF | 100 nF | 470 nF | 56 nF | 220 nF | 330 nF | 1.2 μF | 180 nF |

ORDERING INFORMATION


| 0805 | P | 101 | J | A | X | B | - |
|--|------------|---|---|---|---|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0402 0504 0603 0805 1206 1210 1808 1812 1825 2220 2225 2825 3033 3640 4040 5440 | P = N2T | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0,25pF D = ± 0,5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% | Q = 10V X = 25V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V F = 630V G = 1000V | X = Nickel Tin F = Palladium-Silver P = Polymer Tin (Flex) C = Copper Tin (Non magnetic) W = Nickel Gold H = Dipped SnPb I = Electrolytic SnPb Q = Solderable Silver | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS

| | 0402 | 0504 | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 5440 |
|------------------|------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Length (L) | 1.00 ± 0.1 | 1.25 ± 0.1 | 1.60 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 4.60 ± 0.3 | 4.60 ± 0.4 | 5.60 ± 0.4 | 5.60 ± 0.4 | 7.10 ± 0.4 | 7.60 ± 0.4 | 9.15 ± 0.8 | 10.20 ± 0.8 | 13.70 ± 1.0 |
| Width (W) | 0.50 ± 0.1 | 1.00 ± 0.1 | 0.80 ± 0.2 | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 8.40 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 |
| Thickness max(T) | 0.60 | 1.00 | 0.92 | 1.40 | 1.70 | 2.50 | 2.20 | 3.30 | 3.60 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| Termination (P) | Min Max | 0.10 0.40 | 0.10 0.40 | 0.25 0.70 | 0.25 0.70 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 1.00 | 0.25 1.00 | 0.25 1.00 | 0.50 1.20 | 0.80 1.50 | 0.80 1.50 | 0.80 1.50 |

For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W)




This document is subject to change without notice.




TYPICAL CHARACTERISTICS


N2T Capacitance vs. temperature

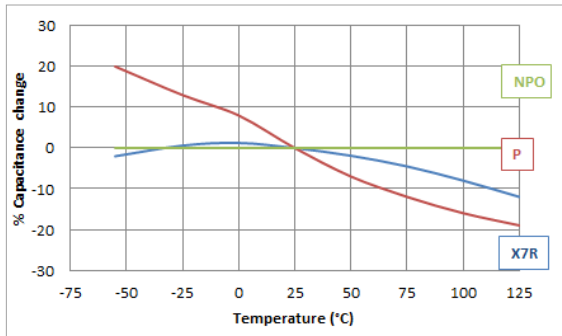

N2T Dissipation factor vs. temperature

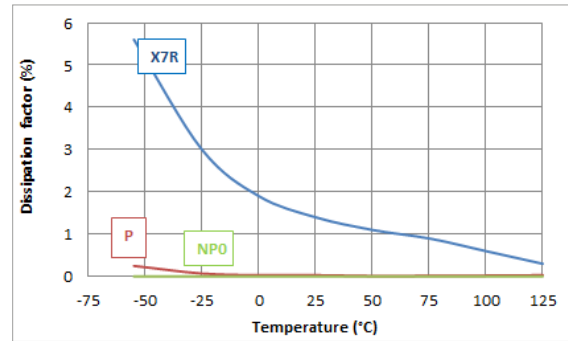

N2T Capacitance vs. voltage

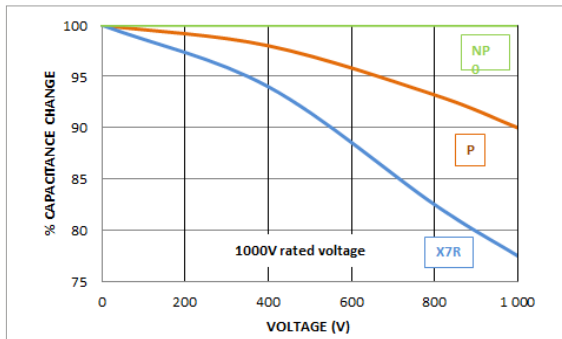

SMD Low Voltage Class II



10V - 1000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : passing, coupling, filtering, blocking



FEATURES

- Temperature stable classe II ceramic
- Custom voltage, package size, capacitance value on request
- Tested in accordance to CECC 32100 and AEC-Q200
- CECC 30700 et NFC 83-132 compliant
- Available in stack or radial
- Wide range of termination
- All PME values available in non magnetic termination
- BX range with improved ESR and voltage coef, MIL specifications

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
X7R : ± 15% with 0Vdc applied
BX : +15% -25% at rated voltage

DISSIPATION FACTOR :
≤ 2.5% at 1kHz for C ≥ 100pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U ≤ 200V | U + 250V 200 < U ≤ 500 | 1.5U 500 < U < 1000 | 1.2U U ≥ 1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0201 | 0402 | 0504 | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 5440 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Min | 100 pF | 2.2 pF | 2.2 pF | 2.2 pF | 6.8 pF | 10 pF | 10 pF | 10 pF | 10 pF | 33 pF | 33 pF | 33 pF | 33 pF | 100 pF | 100 pF | 100 pF | 100 pF |
| 10V | 100 nF | 2.2 μF | 39 nF | 4.7 μF | 22 μF | 22 μF | 47 μF | 470 nF | 33 μF | 10 μF | 47 μF | 15 μF | 2.7 μF | 3.9 μF | 5.6 μF | 6.8 μF | 8.2 μF |
| 25V | 10 nF | 220 nF | 39 nF | 2.2 μF | 10 μF | 10 μF | 22 μF | 470 nF | 22 μF | 10 μF | 47 μF | 15 μF | 2.7 μF | 3.9 μF | 5.6 μF | 6.8 μF | 8.2 μF |
| 50V | 1.5 nF | 100 nF | 39 nF | 1.0 μF | 4.7 μF | 10 μF | 10 μF | 470 nF | 6.8 μF | 10 μF | 22 μF | 2.7 μF | 3.9 μF | 5.6 μF | 6.8 μF | 8.2 μF | 8.2 μF |
| 63V | | 10 nF | 39 nF | 100 nF | 1.0 μF | 4.7 μF | 10 μF | 470 nF | 4.7 μF | 10 μF | 22 μF | 10 μF | 2.7 μF | 3.9 μF | 5.6 μF | 6.8 μF | 8.2 μF |
| 100V | | 10 nF | 39 nF | 100 nF | 1.0 μF | 4.7 μF | 10 μF | 470 nF | 4.7 μF | 10 μF | 22 μF | 10 μF | 2.7 μF | 3.9 μF | 5.6 μF | 6.8 μF | 8.2 μF |
| 200V | | 6.8 nF | 39 nF | 39 nF | 100 nF | 220 nF | 390 nF | 470 nF | 820 nF | 1.8 μF | 1.8 μF | 2.2 μF | 2.7 μF | 3.9 μF | 5.6 μF | 6.8 μF | 8.2 μF |
| 250V | | 5.6 nF | 33 nF | 27 nF | 82 nF | 220 nF | 330 nF | 470 nF | 820 nF | 1.8 μF | 1.8 μF | 2.2 μF | 2.7 μF | 3.9 μF | 5.6 μF | 6.8 μF | 8.2 μF |
| 500V | | 1.2 nF | 6.8 nF | 6.8 nF | 27 nF | 82 nF | 180 nF | 220 nF | 330 nF | 8.2 μF | 8.2 μF | 1.0 μF | 1.2 μF | 1.8 μF | 2.7 μF | 2.7 μF | 3.9 μF |
| 630V | | | | 3.9 nF | 15 nF | 47 nF | 120 nF | 120 nF | 270 nF | 560 nF | 560 nF | 820 nF | 1.0 μF | 1.2 μF | 1.8 μF | 2.2 μF | 2.7 μF |
| 1000V | | | | 1.2 nF | 5.6 nF | 15 nF | 47 nF | 39 nF | 120 nF | 330 nF | 330 nF | 470 nF | 560 nF | 820 nF | 1.2 μF | 1.2 μF | 1.8 μF |

Max values italic obtained with BME parts

ORDERING INFORMATION


| 0805 | Y | 103 | K | C | X | B | - |
|--|-------------------------------|---|------------------------------------|---|---|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0201 0402 0504 0603 0805 1206 1210 1808 1812 1825 2220 2225 2825 3033 3640 4040 5440 | Y = X7R X = BX BY = 2C1 | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | Q = 10V X = 25V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V F = 630V G = 1000V | X = Nickel Tin F = Palladium-Silver P = Polymer Tin (Flex) C = Copper Tin (Non magnetic) CP = Copper Polymer Tin (Non magnetic) W = Nickel Gold Flash G = Nickel Gold Thick H = Dipped SnPb S = Dipped SAC SP = Polymer Dipped SAC HP = Polymer Dipped SnPb I = Electrolytic SnPb IP = Polymer Electrolytic SnPb Q = Solderable Silver | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS

| | 0201 | 0402 | 0504 | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 5440 |
|------------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Length (L) | 0.60 ± 0.03 | 1.00 ± 0.1 | 1.25 ± 0.1 | 1.60 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 4.60 ± 0.3 | 4.60 ± 0.4 | 5.60 ± 0.4 | 5.60 ± 0.4 | 7.10 ± 0.4 | 7.60 ± 0.4 | 9.15 ± 0.8 | 10.20 ± 0.8 | 13.70 ± 1.0 |
| Width (W) | 0.30 ± 0.03 | 0.50 ± 0.1 | 1.00 ± 0.1 | 0.80 ± 0.2 | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 8.40 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 |
| Thickness max(T) | 0.35 | 0.60 | 1.00 | 0.92 | 1.40 | 1.70 | 2.50 | 2.20 | 3.30 | 3.60 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| Termination (P) | Min Max | 0.10 0.20 | 0.10 0.40 | 0.10 0.40 | 0.25 0.40 | 0.25 0.70 | 0.25 0.70 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 1.00 | 0.25 1.00 | 0.50 1.20 | 0.80 1.50 | 0.80 1.50 | 0.80 1.50 |

For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W)




This document is subject to change without notice.




TYPICAL CHARACTERISTICS


X7R Capacitance and dissipation factor vs temperature

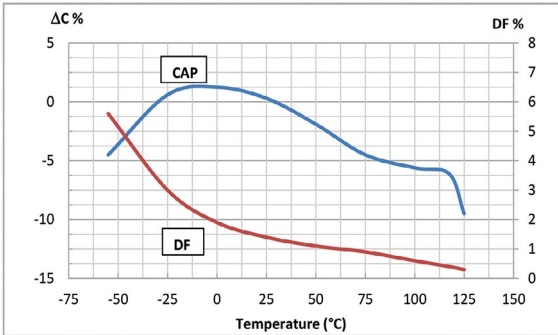


BX Capacitance and dissipation factor vs temperature

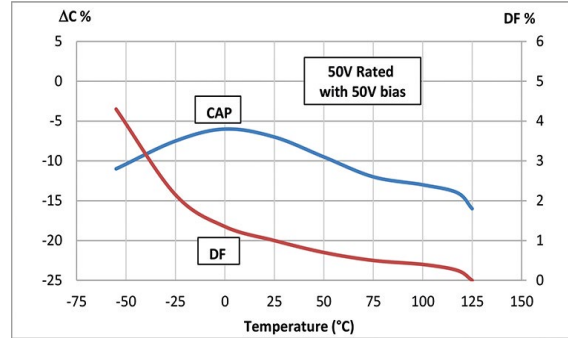


X7R Voltage coefficient of capacitance

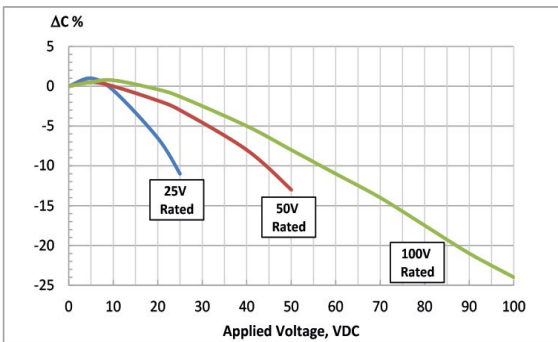


BX Voltage coefficient of capacitance

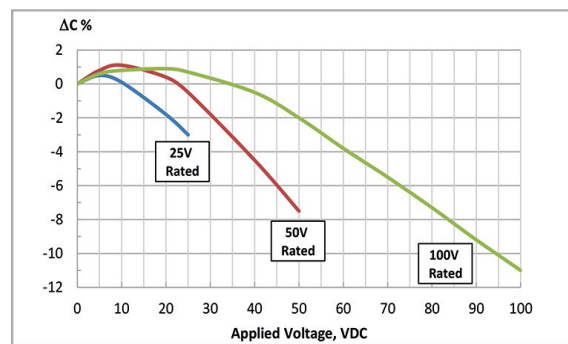


X7R and BX Aging

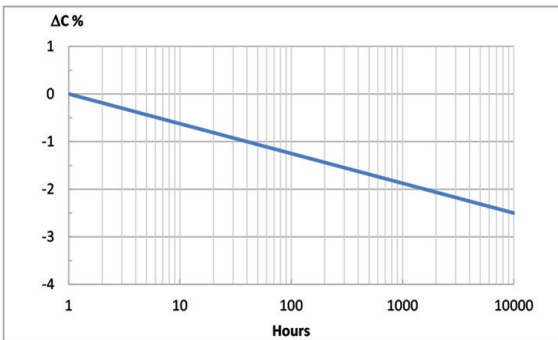


X7R and BX Insulation resistance vs temperature

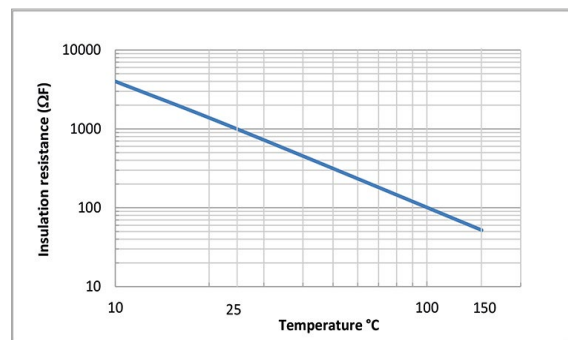

X7R Impedance vs frequency

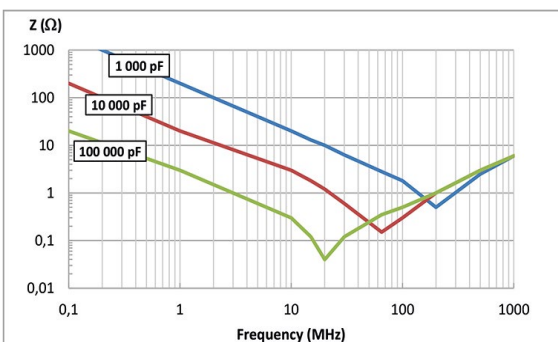

BX Impedance vs frequency

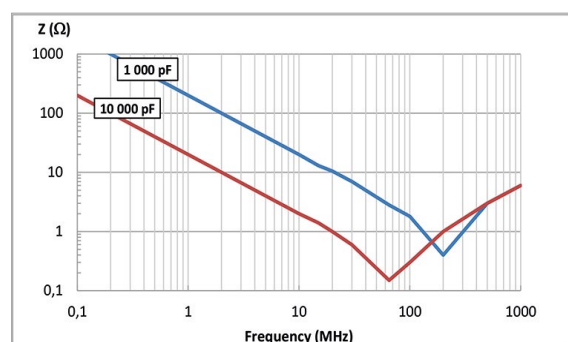

High Capacitance capacitors

X7R X7S X6S X5R X7T Series



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Digital circuit coupling/decoupling
- High frequency & high-density type power suppliers
- For bypassing
- Ideal for smoothing circuits
- Suitable for DC-DC converter, personal computer and peripherals, telecommunication and general electronic equipment



RoHS compliant



FEATURES

- Realize high capacitance in small sizes
- Basis Metal Electrode
- RoHS and HALOGEN compliant
- Surface mount suited for wave and reflow soldering
- High reliability and no polarity
- Excellent in high frequency characteristics
- Various termination available
- AEC-Q200 range can be proposed in High Reliability

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
X7R, X7S, X7T : - 55°C, + 125°C
X6S : - 55°C, + 105°C
X5R : - 55°C, + 85°C

TEMPERATURE COEFFICIENT :
X7R : ±15% with 0Vdc applied
X7S : ±22% with 0Vdc applied
X7T : +22% -33% with 0Vdc applied
X6S : ±22% with 0Vdc applied
X5R : ±15% with 0Vdc applied

DISSIPATION FACTOR :
cf Table

INSULATION RESISTANCE (IR) :
25°C/Un 10⁴ MOhm or 500 Ohm-Farad whichever is less
Except ° table 25°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less
Except ° table 50 Ohm-Farad


DIELECTRIC STRENGTH TEST :
2.5Un for 5s with 50mA max charging current

QUICK REFERENCE DATA (MAX)

| | 0201 | | | 0402 | | | 0603 | | | 0805 | | | 1206 | | | | 1210 | | | | | | | | | | | |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|-------|-------|------|-------|-------|-------|-------|-------|
| | X7S | X6S | X5R | X7R | X7S | X7T | X6S | X5R | X7R | X7S | X7T | X6S | X5R | X7R | X7S | X7T | X6S | X5R | X7R | X7S | X6S | X5R | X7R | X7S | X7T | X6S | X5R | |
| 2.5V | | | | | | | | | | | 22µF | | | | | 47µF | | | | | | | | | | | | 330µF |
| 4V | 1.0µF | 2.2µF | | 2.2µF | | 10µF | 22µF | 22µF | 10µF | | | 47µF | | 22µF | | | 100µF | 100µF | 22µF | | 220µF | 220µF | 47µF | | | | 220µF | 330µF |
| 6.3V | 1.0µF | | 4.7µF | 2.2µF | | 4.7µF | 10µF | 22µF | 10µF | | 10µF | 22µF | 47µF | 22µF | | | 47µF | 100µF | 22µF | 47µF | 47µF | 220µF | 47µF | 100µF | 100µF | 100µF | 220µF | |
| 10V | | 1.0µF | | 2.2µF | 2.2µF | 4.7µF | 4.7µF | 10µF | 10µF | | 10µF | 10µF | 22µF | 10µF | 22µF | 22µF | 22µF | 47µF | 22µF | | 47µF | 100µF | 47µF | 47µF | | | 47µF | 100µF |
| 16V | | | 2.2µF | | | 2.2µF | 2.2µF | 4.7µF | 2.2µF | 4.7µF | | 10µF | 22µF | 10µF | | | 22µF | 22µF | 22µF | 22µF | 22µF | 47µF | 22µF | | | | 47µF | 100µF |
| 25V | | | | | | 1.0µF | 2.2µF | 2.2µF | 2.2µF | | | 10µF | 10µF | 4.7µF | 10µF | | 10µF | 22µF | 10µF | | 22µF | 22µF | 22µF | | | | | 47µF |
| 35V | | | | | | | 2.2µF | 1.0µF | | | | 2.2µF | 10µF | 4.7µF | | | 10µF | 22µF | 10µF | | 10µF | 10µF | 10µF | | | | | |
| 50V | | | | | | | | 1.0µF | 1.0µF | | | | 2.2µF | 4.7µF | | | 4.7µF | 10µF | | | 4.7µF | 10µF | 10µF | | | | | |
| 100V | | | | | | | | | | | 1.0µF | | | 1.0µF | 1.0µF | 2.2µF | | | | | 4.7µF | | | | | | | |

DIMENSIONS IN MILLIMETERS

| | 0201 | 0402 | 0603 | 0805 | 1206 | 1210 |
|-------------------|----------------------------|-------------|-------------|-------------|-------------|-------------|
| Length (L) | 0.60 ± 0.05 (0.09 C>1.0µF) | 1.00 ± 0.10 | 1.60 ± 0.20 | 2.00 ± 0.20 | 3.20 ± 0.20 | 3.20 ± 0.30 |
| Width (W) | 0.30 ± 0.05 (0.09 C>1.0µF) | 0.5 ± 0.10 | 0.80 ± 0.20 | 1.25 ± 0.20 | 1.60 ± 0.20 | 2.50 ± 0.30 |
| Thickness max (T) | 0.33 | 0.70 | 0.95 | 1.45 | 1.90 | 2.80 |
| Termination (P) | Min | 0.10 | 0.15 | 0.30 | 0.40 | 0.40 |
| | Max | 0.20 | 0.30 | 0.55 | 0.70 | 1.10 |



ORDERING INFORMATION

| 0805 | T | 475 | M | X | X | B | BM | |
|--|---|---|------------------------|---|--|-----------------------------|----------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | BME | SPECIAL PARAMETERS |
| 0201 0402 0603 0805 1206 1210 | Y = X7R T = X7S W = X7T R = X6S S = X5R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF | K = ±10 % M = ±20 % | V = 2.5V Y = 4V R = 6.3V Q = 10V J = 16V X = 25V Z = 35V A = 50V B = 100V | X = Nickel Tin P = Polymer W = Nickel Gold Flash G = Nickel Gold Thick H = Dipped SnPb S = Dipped SAC I = Electrolytic SnPb Q = Solderable Silver | B = Taping Reel V = Bulk | BM = BME | - Dxx = Reliability spec D20 = AEC-Q200 |

This document is subject to change without notice.

High Capacitance capacitors

X7R X7S X6S X5R X7T Series



DF TABLE : X7R/X7S/X7T/X6S/X5R

| Rated | D.F.≤ | Exception of D.F.≤ | |
|-------|-------|--------------------|---|
| 100V | ≤2.5% | | |
| 50V | ≤2.5% | ≤3.5% | 1206<2.2μF, 1210≥2.2μF, 1812≥4.7μF |
| | | ≤5% | 0201, 1210≥4.7μF |
| | | ≤10% | 0402, 0603, 0805, 1206≥2.2μF, 1210≥10μF |
| 35V | ≤10% | | |
| 25V | ≤3.5% | ≤5% | 0805, 1210≥10μF |
| | | ≤10% | 0201, 0603, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF |
| | | ≤12.5% | 0402 |
| 16V | ≤3.5% | ≤5% | 0805<2.2μF, 1206≥2.2μF, 1210≥4.7μF |
| | | ≤10% | 0201, 0402, 0603, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF |
| | | ≤15% | 0603<10μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF |
| 10V | ≤5% | ≤10% | 0201, 0402, 0603≥10μF |
| | | ≤15% | |
| | | ≤20% | 0201, 0402<2.2μF, 0603≥10μF, 0805≥4.7μF, 1206≥4.7μF, 1210≥100μF |
| 6.3V | ≤10% | | |
| 4V | ≤15% | | |

THICKNESS CODE :

| Code | Thickness (mm) |
|------|----------------|
| C | 0.30±0.04 |
| E | 0.50±0.05 |
| G | 0.50±0.20 |
| J | 0.80±0.07 |
| K | 0.80±0.10 |
| M | 0.95±0.10 |
| O | 1.15±0.15 |
| P | 1.25±0.10 |
| Q | 1.25±0.20 |
| T | 1.60±0.20 |
| U | 1.70±0.20 |
| W | 2.00±0.20 |
| X | 2.25±0.25 |
| Y | 2.50±0.30 |

X7R

| CODE | SIZE | CAP | 0402 | | 0603 | | | | | 0805 | | | | | 1206 | | | | | 1210 | | | | | | | | | | |
|------|--------|-----|------|-----|------|-----|-----|-----|-----|------|------|-----|-----|-----|------|------|------|-----|-----|------|-----|-----|------|------|-----|-----|-----|-----|-----|------|
| | | | 4V | 10V | 6.3V | 10V | 16V | 25V | 35V | 50V | 6.3V | 10V | 16V | 25V | 50V | 100V | 6.3V | 10V | 16V | 25V | 35V | 50V | 100V | 6.3V | 10V | 16V | 25V | 50V | 63V | 100V |
| 105 | 1.0 μF | J | J | J | J | J | J | J | J | J | P | P | P | P | O | O | O | O | T | T | T | T | P | P | P | Y | W | Y | Y | |
| 155 | 1.5 μF | | | | | | | | | | O | O | O | O | O | O | O | O | T | T | T | T | T | T | T | T | Y | Y | Y | |
| 225 | 2.2 μF | J | J | J | J | J | J | | | | O | O | O | O | O | O | O | O | T | T | T | T | T | T | T | Y | Y | Y | Y | |
| 335 | 3.3 μF | | | | | | | | | | O | O | O | O | O | O | O | O | T | T | T | T | T | T | T | Y | Y | Y | Y | |
| 475 | 4.7 μF | | | J | J | | | | | | O | O | O | O | O | O | O | O | T | T | T | T | T | T | W | W | W | Y | Y | Y |
| 685 | 6.8 μF | | | J | J | | | | | | O | O | O | O | O | O | O | O | T | T | T | T | T | T | W | W | W | Y | Y | Y |
| 106 | 10 μF | | | J | J | | | | | | O | O | O | | | | | | T | T | T | T | T | | W | W | W | Y | Y | Y |
| 226 | 22 μF | | | | | | | | | | O | | | | | | | | T | T | T | | | | Y | Y | Y | Y | | |
| 476 | 47 μF | | | | | | | | | | | | | | | | | | | | | | | Y | Y | | | | | |
| 107 | 100 μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Yellow : AECQ-200, White : Industrial

High Capacitance capacitors

X7R X7S X6S X5R X7T Series



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

X7S

| SIZE | 0201 | | 0402 | | 0603 | | 0805 | | 1206 | | 1210 | | | |
|------|--------|------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------|------------------|-----|------------------|-----|
| | CODE | CAP | 4V | 6.3V | 10V | 16V | 25V | 10V | 25V | 100V | 6.3V | 16V | 6.3V | 10V |
| 105 | 1.0 µF | C ^{***} | C ^{***} | | | | | | | G [°] | | | | |
| 155 | 1.5 µF | | | | | | | | | | | | | |
| 225 | 2.2 µF | | | G [°] | G [°] | | K [°] | K [°] | | | | | | |
| 335 | 3.3 µF | | | | | | | | | | | | | |
| 475 | 4.7 µF | | | | | K [°] | K [°] | | | | | | | |
| 685 | 6.8 µF | | | | | | | | | | | | | |
| 106 | 10 µF | | | | | | | G [°] | | | | | | |
| 226 | 22 µF | | | | | | | | O [°] | | U ^{***} | | | |
| 476 | 47 µF | | | | | | | | | U ^{***} | | | Y ^{***} | |
| 107 | 100 µF | | | | | | | | | | | | Y ^{***} | |
| 227 | 220 µF | | | | | | | | | | | | | |

Yellow : AECQ-200, White : Industrial

* : tolerance M only, ° : RC≥10⁴ MOhm or 100 Ω/F whichever is less, °° : RC≥50 Ω/F

X7T

| SIZE | 0402 | | 0603 | | 0805 | | 1210 | | | | | |
|------|--------|----------------|------|----------------|----------------|----------------|------|----------------|----------------|----------------|----------------|------------------|
| | CODE | CAP | 4V | 6.3V | 10V | 16V | 2.5V | 6.3V | 10V | 100V | 6.3V | |
| 105 | 1.0 µF | | | | | | | | | K [°] | K [°] | |
| 155 | 1.5 µF | | | | | | | | | | | |
| 225 | 2.2 µF | | | | | G [°] | | | | | G [°] | |
| 335 | 3.3 µF | | | | | | | | | | | |
| 475 | 4.7 µF | | | G [°] | G [°] | | | | | | | |
| 685 | 6.8 µF | | | | | | | | | | | |
| 106 | 10 µF | G [°] | | | | | | K [°] | K [°] | | | O [°] |
| 226 | 22 µF | | | | | | | K [°] | | | | |
| 476 | 47 µF | | | | | | | | | | | O [°] |
| 107 | 100 µF | | | | | | | | | | | |
| 227 | 220 µF | | | | | | | | | | | Y ^{***} |

X6S

| SIZE | 0201 | | 0402 | | 0603 | | 0805 | | 1206 | | 1210 | | | | | | | | |
|------|--------|----------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------|----|------|-----|-----|-----|-----|-----|----------------|
| | CODE | CAP | 4V | 10V | 4V | 6.3V | 10V | 16V | 25V | 35V | 50V | 4V | 6.3V | 10V | 16V | 25V | 35V | 50V | |
| 105 | 1.0 µF | | C ^{***} | | | | | | | | | | | | | | | | |
| 155 | 1.5 µF | | | | | | | | | | | | | | | | | | |
| 225 | 2.2 µF | C [°] | | | | G [°] | G [°] | | | | | | | | | | | | O [°] |
| 335 | 3.3 µF | | | | | | | | | | | | | | | | | | |
| 475 | 4.7 µF | | | | G [°] | G [°] | | | | | | | | | | | | | U [°] |
| 685 | 6.8 µF | | | | | | | | | | | | | | | | | | |
| 106 | 10 µF | | | | G [°] | | | | | | | | | | | | | | |
| 226 | 22 µF | | | G [°] | | | | K [°] | K [°] | K [°] | | | | | | | | | |
| 476 | 47 µF | | | | | | | | | | | | | | | | | | |
| 107 | 100 µF | | | | | | | | | | | | | | | | | | |
| 227 | 220 µF | | | | | | | | | | | | | | | | | | |
| 330 | 330 µF | | | | | | | | | | | | | | | | | | |

Yellow : AECQ-200, White : Industrial

* : tolerance M only, ° : RC≥10⁴ MOhm or 100 Ω/F whichever is less, °° : RC≥50 Ω/F

X5R

| SIZE | 0201 | | 0402 | | 0603 | | 0805 | | 1206 | | 1210 | | | | | | | | | |
|------|--------|-----|------------------|------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------|-----|-----|-----|-----|-----|--|
| | CODE | CAP | 6.3V | 10V | 16V | 4V | 6.3V | 10V | 16V | 25V | 35V | 50V | 4V | 6.3V | 10V | 16V | 25V | 35V | 50V | |
| 105 | 1.0 µF | | C ^{***} | C ^{***} | C ^{***} | G [°] | G [°] | G [°] | E [°] | E [°] | E [°] | E [°] | G [°] | | | | | | | |
| 155 | 1.5 µF | | | | | | | | | | | | | | | | | | | |
| 225 | 2.2 µF | | | C ^{***} | T [°] | T [°] | E [°] | G [°] | G [°] | G [°] | G [°] | | | | | | | | | |
| 335 | 3.3 µF | | | | | | | | | | | | | | | | | | | |
| 475 | 4.7 µF | | C ^{***} | | | | G [°] | G [°] | | | | | | | | | | | | |
| 685 | 6.8 µF | | | | | | | | | | | | | | | | | | | |
| 106 | 10 µF | | | | | | | | | | | | | | | | | | | |
| 226 | 22 µF | | | | G [°] | G [°] | | | | | | | | | | | | | | |
| 476 | 47 µF | | | | | | | | | | | | | | | | | | | |
| 107 | 100 µF | | | | | | | | | | | | | | | | | | | |
| 227 | 220 µF | | | | | | | | | | | | | | | | | | | |
| 330 | 330 µF | | | | | | | | | | | | | | | | | | | |

Yellow : AECQ-200, White : Industrial

* : tolerance M only, ° : RC≥10⁴ MOhm or 100 Ω/F whichever is less, °° : RC≥50 Ω/F

Low Inductance Capacitors Class II


6.3V -50V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS


- Typical uses : high speed energy transfer on semiconductor applications



RoHS compliant

FEATURES

- Inverted geometry reduces the ESL up to 60% to standard MLCC
- Custom voltage, package size, capacitance value on request
- Tested in accordance to CECC 32100 and AEC-Q200
- CECC 30700 et NFC 83-132 compliant

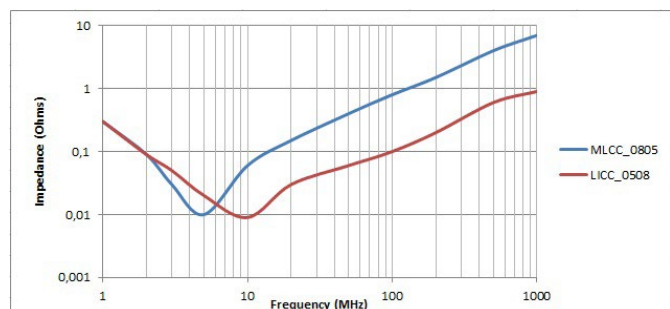

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified


OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
X7R : ± 15% with 0Vdc applied
BX : +15% -25% at rated voltage

DISSIPATION FACTOR :
≤ 2.5% at 1kHz for C ≥ 100pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
Performed per method 103 of EIA 198-2-E
1.2Un for 5s with 50mA max charging current

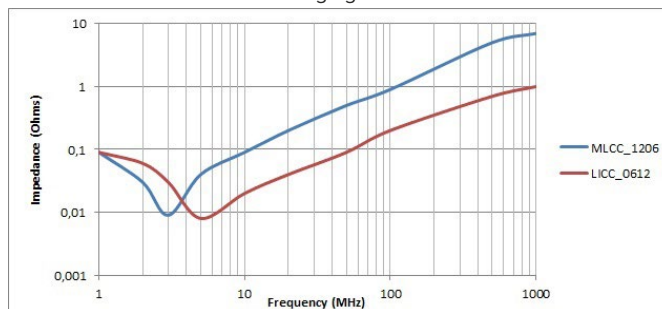

QUICK REFERENCE DATA

| | 0204 | 0306 | 0505 | 0508 | 0612 | 1111 |
|------|--------|--------|-------|--------|--------|--------|
| Min | 1.0 nF | 1.0 nF | 1 nF | 1.0 nF | 1.0 nF | 1.0 nF |
| 6.3V | 22 nF | 220 nF | 56 nF | 1.0 µF | 1.5 µF | 270 nF |
| 10V | | 150 nF | 56 nF | 1.0 µF | 1.5 µF | 270 nF |
| 16V | | 68 nF | 56 nF | 220 nF | 330 nF | 270 nF |
| 25V | | 22 nF | 56 nF | 100 nF | 220 nF | 270 nF |
| 50V | | | 56 nF | 100 nF | 150 nF | 270 nF |

Max values italic obtained with BME parts


ORDERING INFORMATION

| 0805 | Y | 103 | K | C | X | B | XX |
|------------------------------|-------------------|---|------------------------------------|--|---|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0204 0306 0508 0612 | Y = X7R X = BX | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | R = 6.3V Q = 10V J = 16V X = 25V A = 50V | X = Nickel Tin F = Palladium-Silver P = Polymer Tin (Flex) C = Copper Tin (Non magnetic) W = Nickel Gold H = Dipped SnPb I = Electrolytic SnPb Q = Solderable Silver | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, ceramic tolerance contact us

DIMENSIONS IN MILLIMETERS

| | 0204 | 0306 | 0505 | 0508 | 0612 | 1111 |
|-------------------|------------|------------|------------|------------|------------|------------|
| Length (L) | 0.50 ± 0.1 | 0.80 ± 0.1 | 1.40 ± 0.1 | 1.30 ± 0.2 | 1.60 ± 0.2 | 2.80 ± 0.2 |
| Width (W) | 1.00 ± 0.1 | 1.60 ± 0.1 | 1.40 ± 0.1 | 2.00 ± 0.2 | 3.20 ± 0.2 | 2.80 ± 0.2 |
| Thickness max (T) | 0.60 | 0.92 | 1.45 | 2.00 | 3.00 | 2.60 |
| Termination (P) | Min | 0.10 | 0.10 | 0.25 | 0.25 | 0.25 |
| | Max | 0.40 | 0.40 | 0.40 | 0.70 | 0.70 |



For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W)

This document is subject to change without notice.

Low Inductance Capacitors Class II

6.3V -50V



STANDARD SIZE : 0204 to 0612


| SIZE | CAP | 0204 | | | | | 0306 | | | | 0505 | | | | 0508 | | | | | 0612 | | | | | 1111 | | | |
|------|--------|------|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|------|-----|-----|-----|------|-----|-----|-----|-----|------|---|--|--|
| | | 6.3V | 6.3V | 10V | 16V | 25V | 10V | 16V | 25V | 50V | 6.3V | 10V | 16V | 25V | 50V | 6.3V | 10V | 16V | 25V | 50V | 10V | 16V | 25V | 50V | | | | |
| 102 | 1.0 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 122 | 1.2 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 152 | 1.5 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 182 | 1.8 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 222 | 2.2 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 272 | 2.7 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 332 | 3.3 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 392 | 3.9 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 472 | 4.7 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 562 | 5.6 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 682 | 6.8 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 822 | 8.2 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 103 | 10 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 123 | 12 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 153 | 15 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 183 | 18 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 223 | 22 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 273 | 27 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 333 | 33 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 393 | 39 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 473 | 47 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 563 | 56 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 683 | 68 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 823 | 82 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 104 | 100 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 124 | 120 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 154 | 150 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 184 | 180 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 224 | 220 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 274 | 270 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 334 | 330 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 394 | 390 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 474 | 470 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 564 | 560 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 684 | 680 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 824 | 820 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 105 | 1.0 μF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 125 | 1.2 μF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 155 | 1.5 μF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 185 | 1.8 μF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 225 | 2.2 μF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 275 | 2.7 μF | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |

● BME parts ● BX range




TYPICAL CHARACTERISTICS


Capacitance and dissipation factor vs temperature

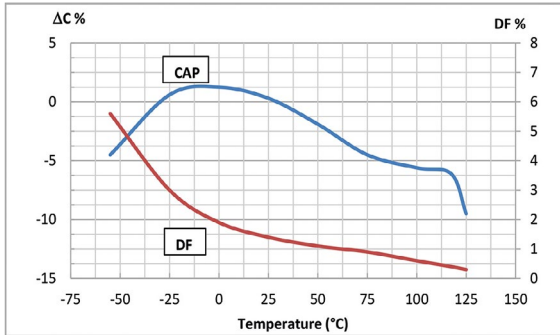


Insulation resistance vs temperature

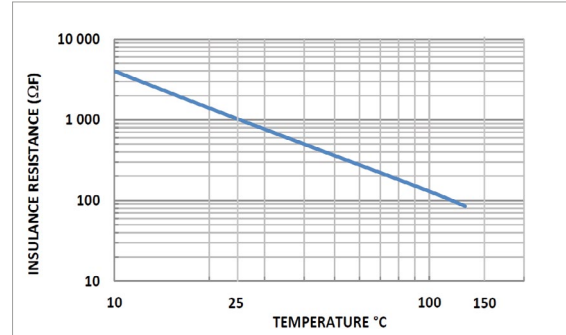


Inductance vs. frequency
0508Y104KXX & 0306Y104KXX

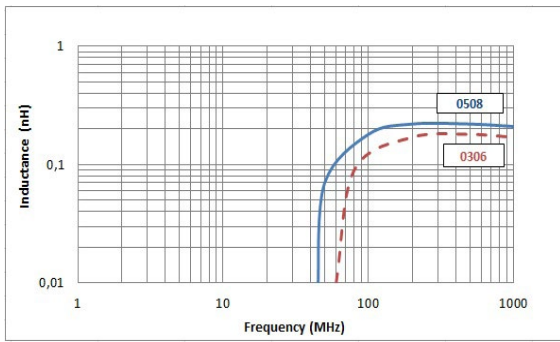


Impedance & ESR vs. frequency
0508Y104KXX & 0306Y104KXX

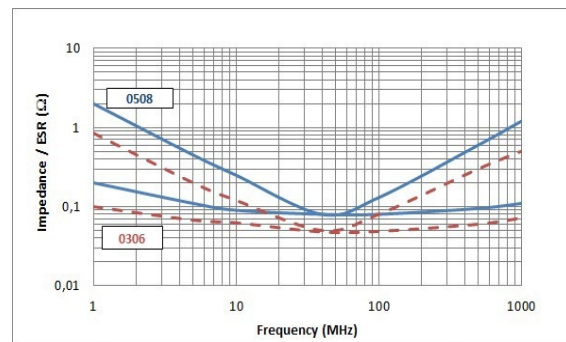

Series resonant frequency 0612

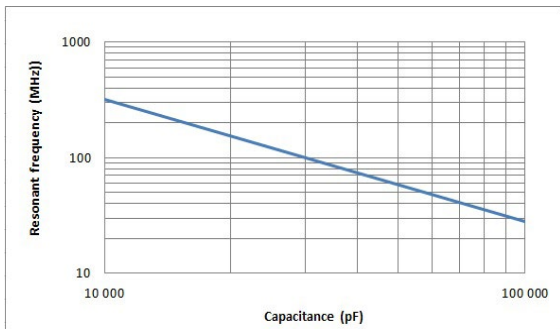

Impedance & ESR vs. frequency 0612Y823KXA

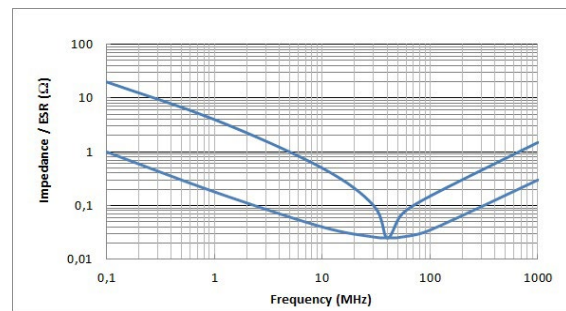

SMD High Voltage Class I


1KV - 15KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : timing, precision circuitry, filtering



RoHS
compliant

FEATURES

- Ultra stable temperature compensating class I ceramic
- Custom voltage, package size, capacitance value on request
- Tested in accordance to CECC 32100 and AEC-Q200
- CECC 30600 et NFC 83-131 compliant
- Available in stack or radial
- Surface coating can be necessary to prevent surface arcing

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
± 30ppm with 0Vdc applied

DISSIPATION FACTOR :
≤ 1.10-3 at 1Vrms and 1MHz for values ≤ 1000pF
≤ 1.10-3 at 1Vrms and 1KHz for values > 1000pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
1.2Un for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3640 | 4040 | 5440 | 5550 | 6660 | 8060 | 80150 | 15080 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Min | 0.1 pF | 0.4 pF | 0.4 pF | 1.0 pF | 1.0 pF | 1.0 pF | 1.0 pF | 1.0 pF | 4.7 pF | 10 pF | 10 pF | 10 pF | 10 pF | 10 pF | 10 pF | 22 pF | 22 pF |
| 1KV | 820 pF | 2.7 nF | 6.8 nF | 6.8 nF | 15 nF | 33 nF | 39 nF | 47 nF | 56 nF | 120 nF | 120 nF | 180 nF | 220 nF | 330 nF | 390 nF | 1.0 µF | 1.0 µF |
| 1.5KV | 330 pF | 1.0 nF | 2.7 nF | 2.7 nF | 8.2 nF | 18 nF | 18 nF | 27 nF | 33 nF | 68 nF | 68 nF | 100 nF | 120 nF | 180 nF | 220 nF | 560 nF | 560 nF |
| 2KV | 150 pF | 560 pF | 1.5 nF | 1.2 nF | 3.9 nF | 10 nF | 12 nF | 15 nF | 18 nF | 39 nF | 47 nF | 56 nF | 82 nF | 120 nF | 120 nF | 330 nF | 330 nF |
| 3KV | | 180 pF | 470 pF | 470 pF | 1.2 nF | 2.7 nF | 2.7 nF | 3.9 nF | 4.7 nF | 10 nF | 12 nF | 15 nF | 18 nF | 27 nF | 33 nF | 82 nF | 82 nF |
| 4KV | | 82 pF | 220 pF | 220 pF | 680 pF | 1.8 nF | 1.8 nF | 2.2 nF | 3.3 nF | 6.8 nF | 8.2 nF | 10 nF | 12 nF | 18 nF | 22 nF | 56 nF | 56 nF |
| 5KV | | | | 150 pF | 390 pF | 1.0 nF | 1.2 nF | 1.8 nF | 2.2 nF | 4.7 nF | 5.6 nF | 6.8 nF | 8.2 nF | 12 nF | 15 nF | 39 nF | 39 nF |
| 8KV | | | | 47 pF | 120 pF | 330 pF | 330 pF | 390 pF | 470 pF | 1.0 nF | 1.2 nF | 1.8 nF | 2.2 nF | 3.3 nF | 3.9 nF | 10 nF | 10 nF |
| 10KV | | | | 22 pF | 82 pF | 180 pF | 220 pF | 270 pF | 330 pF | 680 pF | 820 pF | 1.2 nF | 1.5 nF | 2.2 nF | 2.7 nF | 6.8 nF | 6.8 nF |
| 12KV | | | | | | | | | | 470 pF | 560 pF | 820 pF | 1.0 nF | 1.5 nF | 1.8 nF | 4.7 nF | 4.7 nF |
| 15KV | | | | | | | | | | 270 pF | 330 pF | 470 pF | 680 pF | 820 pF | 1.0 nF | 2.7 nF | 2.7 nF |

ORDERING INFORMATION


| 5440 | A | 101 | K | H | X | B | - |
|--|------------|--|---|--|---|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0805 1206 1210 1808 1812 1825 2220 2225 2825 3033 3640 4040 4055 5440 5550 6660 8060 80150 15080 | A = NPO | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0,5% if > 10pF and ±0,05pF si < 10pF B = ± 0,1pF C = ± 0,25pF D = ± 0,5pF E = 0.1% F = ± 1% G = ± 2% J = ± 5% K = ± 10% | G = 1KV O = 1.5KV H = 2KV T = 2.5KV I = 3KV K = 4KV L = 5KV 6 = 6KV 8 = 8KV 10 = 10KV 12 = 12KV 15 = 15KV | X = Nickel Tin F = Palladium-Silver P = Polymer Tin C = Copper Tin W = Nickel Gold Q = Solderable Silver | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us

DIMENSIONS IN MILLIMETERS

| | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3640 | 4040 | 5440 | 5550 | 6660 | 8060 | 80150 | 15080 |
|------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Length (L) | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 4.60 ± 0.3 | 4.60 ± 0.4 | 5.60 ± 0.4 | 5.60 ± 0.4 | 7.10 ± 0.4 | 9.15 ± 0.8 | 10.20 ± 0.8 | 13.70 ± 1.0 | 14.00 ± 1.0 | 16.80 ± 1.0 | 20.30 ± 1.0 | 20.30 ± 1.0 | 20.30 ± 1.0 |
| Width (W) | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 | 12.70 ± 1.0 | 15.20 ± 1.0 | 15.20 ± 1.0 | 38.10 ± 1.0 | 38.10 ± 1.0 |
| Thickness max(T) | 1.40 | 1.70 | 2.50 | 2.20 | 3.30 | 3.60 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 |
| Termination (P) | | | | | | | | | | | | | | | | | |
| Min | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| Max | 0.70 | 0.70 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 1.00 | 1.00 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 |

For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W)




This document is subject to change without notice.




TYPICAL CHARACTERISTICS


NPO Temperature coefficient of capacitance

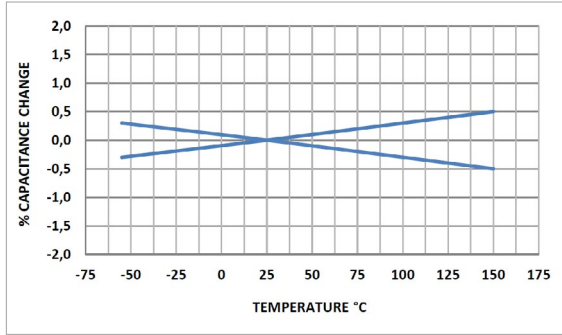


NPO Insulation resistance vs. temperature

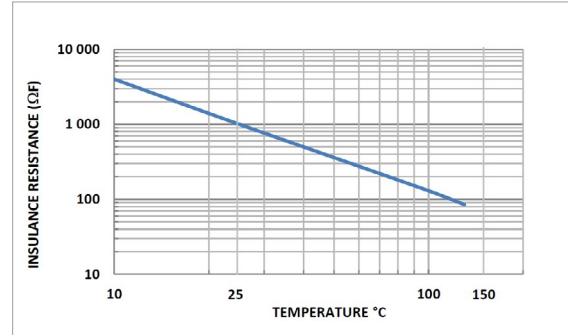


NPO Aging rate

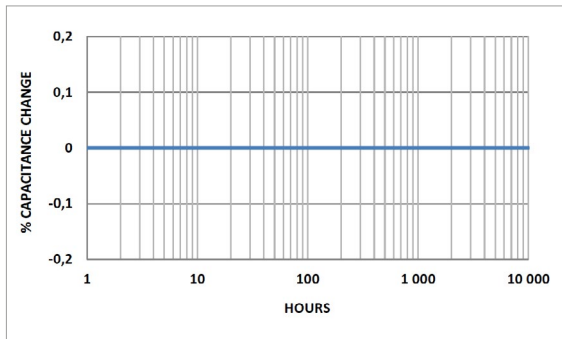


NPO Voltage coefficient of capacitance

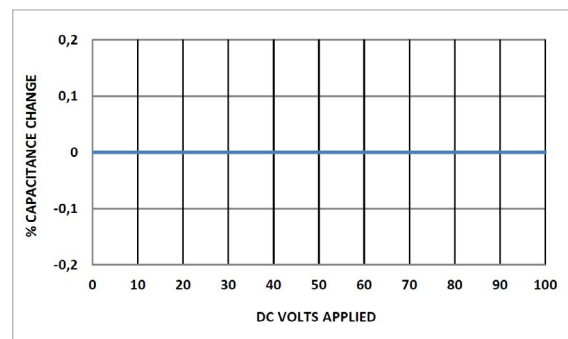

NPO Change of Capacitance with Frequency

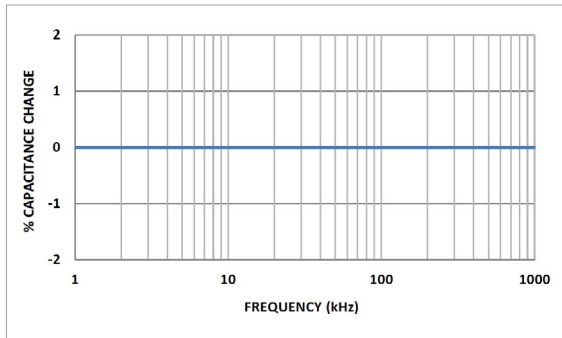

NPO Dissipation factor vs. frequency

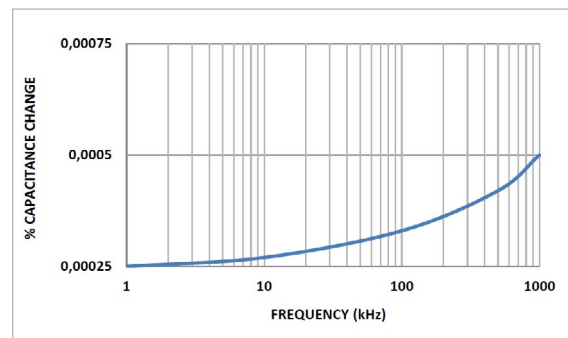

SMD High Voltage N2T


1KV - 15KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : timing, filtering, pulse discharge



RoHS
compliant

FEATURES

- Class 1
- Close to Class 2 volumetric capacitance, high power
- No piezoelectric effect, high current pulse discharge
- Custom voltage, package size, capacitance value on request
- Available in stack or radial
- Surface coating can be necessary to prevent surface arcing

QUICK REFERENCE DATA

| | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3640 | 4040 | 5440 | 5550 | 6660 | 8060 | 80150 | 15080 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Min | 1.0 pF | 4.7 pF | 4.7 pF | 4.7 pF | 4.7 pF | 10 pF | 10 pF | 10 pF | 10 pF | 47 pF | 47 pF | 47 pF | 47 pF | 47 pF | 47 pF | 68 pF | 68 pF |
| 1KV | 2.2 nF | 8.2 nF | 22 nF | 18 nF | 47 nF | 100 nF | 120 nF | 150 nF | 180 nF | 390 nF | 390 nF | 560 nF | 680 nF | 1.0 µF | 1.2 µF | 3.3 µF | 3.3 µF |
| 1.5KV | 820 pF | 2.7 nF | 6.8 nF | 6.8 nF | 22 nF | 56 nF | 56 nF | 82 nF | 100 nF | 180 nF | 220 nF | 270 nF | 390 nF | 560 nF | 680 nF | 1.8 µF | 1.8 µF |
| 2KV | 390 pF | 1.2 nF | 3.3 nF | 3.3 nF | 8.2 nF | 18 nF | 22 nF | 33 nF | 39 nF | 82 nF | 82 nF | 120 nF | 150 nF | 220 nF | 270 nF | 680 nF | 680 nF |
| 3KV | | 470 pF | 1.2 nF | 1.2 nF | 3.3 nF | 10 nF | 10 nF | 12 nF | 18 nF | 39 nF | 39 nF | 56 nF | 68 nF | 100 nF | 120 nF | 330 nF | 330 nF |
| 4KV | | 220 pF | 680 pF | 680 pF | 1.8 nF | 4.7 nF | 4.7 nF | 6.8 nF | 8.2 nF | 18 nF | 18 nF | 27 nF | 33 nF | 47 nF | 56 nF | 150 nF | 150 nF |
| 5KV | | | | 390 pF | 1.2 nF | 2.7 nF | 3.3 nF | 4.7 nF | 5.6 nF | 12 nF | 12 nF | 18 nF | 22 nF | 33 nF | 39 nF | 100 nF | 100 nF |
| 8KV | | | | 120 pF | 390 pF | 1.0 nF | 1.2 nF | 1.2 nF | 1.5 nF | 3.9 nF | 4.7 nF | 6.8 nF | 8.2 nF | 10 nF | 12 nF | 33 nF | 33 nF |
| 10KV | | | | | | | | | 1.0 nF | 2.2 nF | 2.7 nF | 3.9 nF | 4.7 nF | 6.8 nF | 8.2 nF | 18 nF | 18 nF |
| 12KV | | | | | | | | | | 1.5 nF | 1.8 nF | 2.2 nF | 3.3 nF | 4.7 nF | 5.6 nF | 12 nF | 12 nF |
| 15KV | | | | | | | | | | 820 pF | 820 pF | 1.5 nF | 1.8 nF | 2.7 nF | 3.3 nF | 8.2 nF | 8.2 nF |

ORDERING INFORMATION


| 5440 | P | 101 | J | T | X | B | - |
|--|------------|---|--|--|---|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0805 1206 1210 1808 1812 1825 2220 2225 2825 3640 4040 4055 5440 5550 6660 8060 80150 15080 | P = N2T | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% | G = 1KV O = 1.5KV H = 2KV I = 3KV T = 2.5KV K = 4KV L = 5KV 6 = 6KV 8 = 8KV 10 = 10KV 12 = 12KV 15 = 15KV | X = Nickel Tin F = Palladium-Silver P = Polymer Tin C = Copper Tin W = Nickel Gold Q = Solderable Silver | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us

DIMENSIONS IN MILLIMETERS

| | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3640 | 4040 | 5440 | 5550 | 6660 | 8060 | 80150 | 15080 |
|------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Length (L) | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 4.60 ± 0.3 | 4.60 ± 0.4 | 5.60 ± 0.4 | 5.60 ± 0.4 | 7.10 ± 0.4 | 9.15 ± 0.8 | 10.20 ± 0.8 | 13.70 ± 1.0 | 14.00 ± 1.0 | 16.80 ± 1.0 | 20.30 ± 1.0 | 20.30 ± 1.0 | 38.10 ± 1.0 |
| Width (W) | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 | 12.70 ± 1.0 | 15.20 ± 1.0 | 15.20 ± 1.0 | 38.10 ± 1.0 | 20.30 ± 1.0 |
| Thickness max(T) | 1.40 | 1.70 | 2.50 | 2.20 | 3.30 | 3.60 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 |
| Termination (P) | Min | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| | Max | 0.70 | 0.70 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 1.00 | 1.00 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 |

For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W)



This document is subject to change without notice.

SMD High Voltage N2T

1KV - 15KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

STANDARD SIZE : 0805 to 3640


| SIZE | 0805 | | 1206 | | 1210 | | 1808 | | 1812 | | 1825 | | 2220 | | 2225 | | 3640 | | | | SIZE | | | | | | | | | |
|------|--------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-------|------|-----|------|-----|-----|-----|-------|-----|-----|-----|-----|-----|------|------|--------|------|
| | CODE | CAP | 1KV | 2KV | 1KV | 2KV | 1KV | 2KV | 3KV | 4KV | 5KV | 8KV | 1KV | 1.5KV | 2KV | 3KV | 4KV | 5KV | 8KV | 1KV | 1.5KV | 2KV | 3KV | 4KV | 5KV | 8KV | 10KV | 12KV | CAP | CODE |
| 1R0 | 1.0 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.0 pF | 1R0 |
| 1R2 | 1.2 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.2 pF | 1R2 |
| 1R5 | 1.5 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.5 pF | 1R5 |
| 1R8 | 1.8 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.8 pF | 1R8 |
| 2R2 | 2.2 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2.2 pF | 2R2 |
| 2R7 | 2.7 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2.7 pF | 2R7 |
| 3R3 | 3.3 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 3.3 pF | 3R3 |
| 3R9 | 3.9 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 3.9 pF | 3R9 |
| 4R7 | 4.7 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 4.7 pF | 4R7 |
| 5R6 | 5.6 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 5.6 pF | 5R6 |
| 6R8 | 6.8 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 6.8 pF | 6R8 |
| 8R2 | 8.2 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 8.2 pF | 8R2 |
| 100 | 10 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 10 pF | 100 |
| 120 | 12 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 12 pF | 120 |
| 150 | 15 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 15 pF | 150 |
| 180 | 18 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 18 pF | 180 |
| 220 | 22 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 22 pF | 220 |
| 270 | 27 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 27 pF | 270 |
| 330 | 33 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 33 pF | 330 |
| 390 | 39 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 39 pF | 390 |
| 470 | 47 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 47 pF | 470 |
| 560 | 56 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 56 pF | 560 |
| 680 | 68 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 68 pF | 680 |
| 820 | 82 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 82 pF | 820 |
| 101 | 100 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 100 pF | 101 |
| 121 | 120 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 120 pF | 121 |
| 151 | 150 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 150 pF | 151 |
| 181 | 180 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 180 pF | 181 |
| 221 | 220 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 220 pF | 221 |
| 271 | 270 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 270 pF | 271 |
| 331 | 330 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 330 pF | 331 |
| 391 | 390 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 390 pF | 391 |
| 471 | 470 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 470 pF | 471 |
| 561 | 560 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 560 pF | 561 |
| 681 | 680 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 680 pF | 681 |
| 821 | 820 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 820 pF | 821 |
| 102 | 1.0 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.0 nF | 102 |
| 122 | 1.2 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.2 nF | 122 |
| 152 | 1.5 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.5 nF | 152 |
| 182 | 1.8 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1.8 nF | 182 |
| 222 | 2.2 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2.2 nF | 222 |
| 272 | 2.7 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2.7 nF | 272 |
| 332 | 3.3 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 3.3 nF | 332 |
| 392 | 3.9 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 3.9 nF | 392 |
| 472 | 4.7 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 4.7 nF | 472 |
| 562 | 5.6 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 5.6 nF | 562 |
| 682 | 6.8 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 6.8 nF | 682 |
| 822 | 8.2 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 8.2 nF | 822 |
| 103 | 10 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 10 nF | 103 |
| 123 | 12 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 12 nF | 123 |
| 153 | 15 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 15 nF | 153 |
| 183 | 18 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 18 nF | 183 |
| 223 | 22 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 22 nF | 223 |
| 273 | 27 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 27 nF | 273 |
| 333 | 33 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 33 nF | 333 |
| 393 | 39 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 39 nF | 393 |
| 473 | 47 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 47 nF | 473 |
| 563 | 56 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 56 nF | 563 |
| 683 | 68 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 68 nF | 683 |
| 823 | 82 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 82 nF | 823 |
| 104 | 100 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 100 nF | 104 |
| 124 | 120 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 120 nF | 124 |
| 154 | 150 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 150 nF | 154 |
| 184 | 180 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 180 nF | 184 |
| 224 | 220 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 220 nF | 224 |
| 274 | 270 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 270 nF | 274 |
| 334 | 330 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 330 nF | 334 |
| 394 | 390 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 390 nF | 394 |
| 474 | 470 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 470 nF | 474 |
| 564 | 560 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 560 nF | 564 |
| 684 | 680 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | | 680 nF | 684 |

This document is subject to change without notice.




TYPICAL CHARACTERISTICS


N2T Capacitance vs. temperature

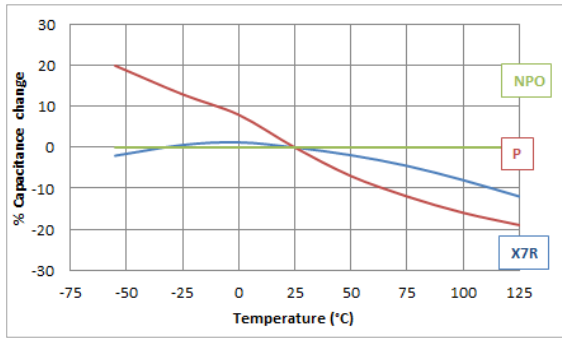

N2T Dissipation factor vs. temperature

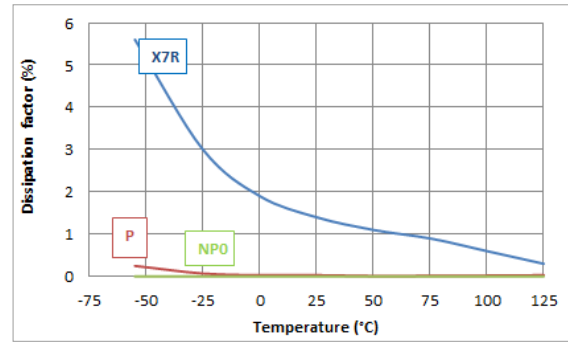

N2T Capacitance vs. voltage

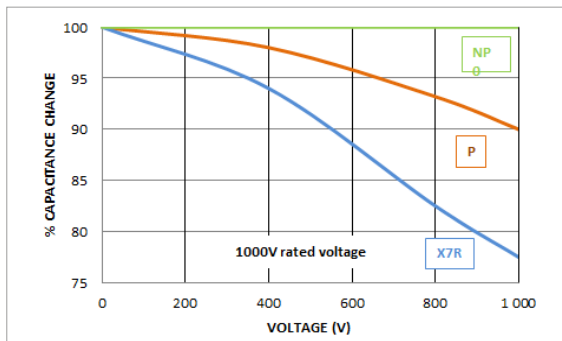

SMD High Voltage Class II


1KV - 15KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : passing, coupling, filtering, blocking



RoHS
compliant

FEATURES

- Temperature stable class II ceramic
- Custom voltage, package size, capacitance value on request
- Tested in accordance to CECC 32100 and AEC-Q200
- CECC 30700 et NFC 83-132 compliant
- Available in stack or radial
- Surface coating can be necessary to prevent surface arcing

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
± 15% with 0Vdc applied

DISSIPATION FACTOR :
≤ 2.5% at 1kHz for C ≥ 100pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
1.2Un for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3640 | 4040 | 5440 | 5550 | 6660 | 8060 | 80150 | 15080 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Min | 6.8 pF | 10 pF | 10 pF | 10 pF | 10 pF | 33 pF | 33 pF | 33 pF | 33 pF | 100 pF | 100 pF | 100 pF | 100 pF | 100 pF | 100 pF | 180 pF | 180 pF |
| 1KV | 5.6 nF | 15 nF | 47 nF | 39 nF | 120 nF | 330 nF | 330 nF | 470 nF | 560 nF | 1.2 µF | 1.2 µF | 1.8 µF | 2.2 µF | 3.3 µF | 3.9 µF | 10 µF | 10 µF |
| 1.5KV | 1.8 nF | 5.6 nF | 18 nF | 15 nF | 56 nF | 120 nF | 150 nF | 180 nF | 220 nF | 470 nF | 560 nF | 680 nF | 1.0 µF | 1.2 µF | 1.5 µF | 3.9 µF | 3.9 µF |
| 2KV | 820 pF | 2.7 nF | 8.2 nF | 8.2 nF | 22 nF | 56 nF | 68 nF | 82 nF | 120 nF | 270 nF | 270 nF | 390 nF | 470 nF | 680 nF | 820 nF | 2.2 µF | 2.2 µF |
| 3KV | | 1.0 nF | 2.7 nF | 3.3 nF | 8.2 nF | 22 nF | 27 nF | 39 nF | 47 nF | 100 nF | 120 nF | 150 nF | 180 nF | 270 nF | 330 nF | 820 nF | 820 nF |
| 4KV | | 470 pF | 1.5 nF | 1.5 nF | 4.7 nF | 12 nF | 15 nF | 18 nF | 27 nF | 56 nF | 56 nF | 82 nF | 100 nF | 150 nF | 180 nF | 470 nF | 470 nF |
| 5KV | | | | 820 pF | 2.7 nF | 6.8 nF | 8.2 nF | 12 nF | 15 nF | 33 nF | 33 nF | 47 nF | 56 nF | 82 nF | 100 nF | 270 nF | 270 nF |
| 8KV | | | | 270 pF | 1.0 nF | 2.7 nF | 2.7 nF | 3.3 nF | 3.9 nF | 8.2 nF | 10 nF | 15 nF | 18 nF | 27 nF | 33 nF | 82 nF | 82 nF |
| 10KV | | | | | | | 1.5 nF | 1.8 nF | 2.2 nF | 4.7 nF | 5.6 nF | 8.2 nF | 10 nF | 15 nF | 18 nF | 47 nF | 47 nF |
| 12KV | | | | | | | | | | 3.3 nF | 3.9 nF | 5.6 nF | 6.8 nF | 10 nF | 12 nF | 27 nF | 27 nF |
| 15KV | | | | | | | | | | 1.8 nF | 2.2 nF | 3.3 nF | 3.9 nF | 5.6 nF | 6.8 nF | 18 nF | 18 nF |

ORDERING INFORMATION


| 5440 | Y | 103 | K | H | X | B | - |
|--|------------|---|------------------------------------|--|--|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0805 1206 1210 1808 1812 1825 2220 2225 2825 3033 3640 4040 4055 40100 5550 6660 8060 80150 | Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | G = 1KV O = 1.5KV H = 2KV T = 2.5KV I = 3KV K = 4KV L = 5KV 6 = 6KV 8 = 8KV 10 = 10KV 12 = 12KV 15 = 15KV | X = Nickel Tin F = Palladium-Silver P = Polymer Tin C = Copper Tin W = Nickel Gold | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS

| | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2825 | 3640 | 4040 | 5440 | 5550 | 6660 | 8060 | 80150 | 15080 |
|------------------|------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Length (L) | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 4.60 ± 0.3 | 4.60 ± 0.4 | 5.60 ± 0.4 | 5.60 ± 0.4 | 7.10 ± 0.4 | 9.15 ± 0.8 | 10.20 ± 0.8 | 13.70 ± 1.0 | 14.00 ± 1.0 | 16.80 ± 1.0 | 20.30 ± 1.0 | 20.30 ± 1.0 | 38.10 ± 1.0 |
| Width (W) | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 | 12.70 ± 1.0 | 15.20 ± 1.0 | 15.20 ± 1.0 | 38.10 ± 1.0 | 20.30 ± 1.0 |
| Thickness max(T) | 1.40 | 1.70 | 2.50 | 2.20 | 3.30 | 3.60 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 |
| Termination (P) | Min Max | 0.25 0.70 | 0.25 0.70 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 0.80 | 0.25 1.00 | 0.25 1.00 | 0.25 1.50 | 0.80 1.50 | 0.80 1.50 | 0.80 1.50 | 0.80 1.50 | 0.80 1.50 | 0.80 1.50 | 0.80 1.50 |

For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W)




This document is subject to change without notice.




TYPICAL CHARACTERISTICS


X7R Capacitance and factor vs temperature

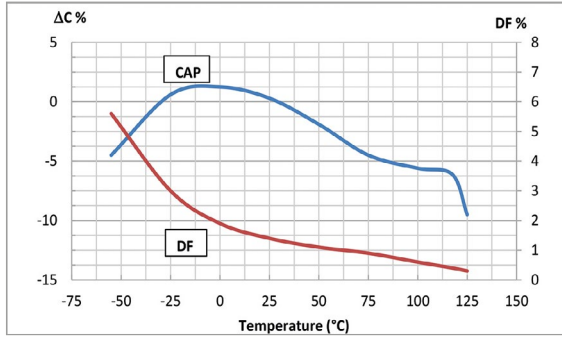


X7R Voltage coefficient of capacitance

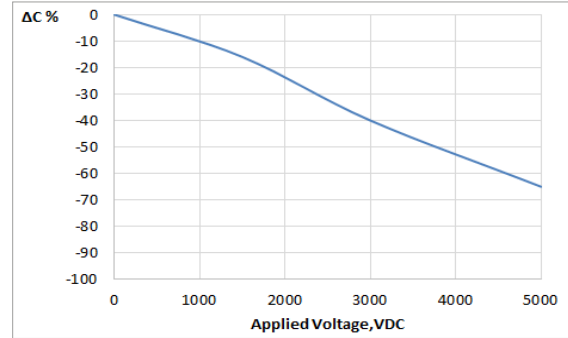

X7R Aging

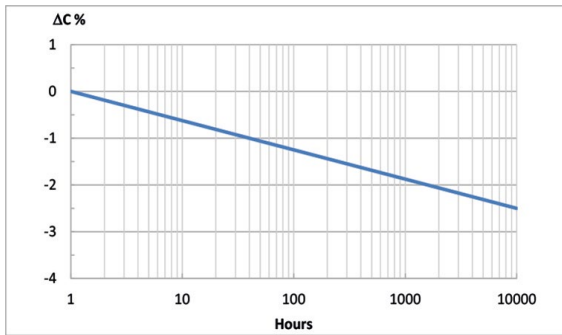

X7R Insulation resistance vs temperature

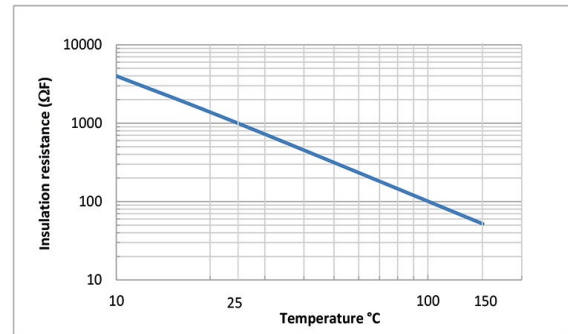

SMD Pulse Energy Capacitor


1000V-3000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : detonators and ignition system, downhole, plasma generation



FEATURES

- Non piezo pulse ceramic, stable, high constant
- Temperature up to 200°C
- Available in stack with J L M Leads
- SRMC 1 or 2 chips : add 1.8mm to chips height
- SRHS 1 chip, SRHD 2 chips : add 1.3mm to chips height
- Thick film bleed resistor with glass cover in option
- High current short duration pulse
- Tested to 1 million pulses without degradation

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 200°C

TEMPERATURE COEFFICIENT :
-2200 ± 350 ppm/°C° with 0Vdc applied

DISSIPATION FACTOR :
≤ 1.10⁻³ at 1Vrms and 1KHz f

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
1.2Un for 5s with 50mA max charging current

QUICK REFERENCE DATA (MAX)

| | 2225 | 3040 | 3640 | 4040 | 4055 | 5550 | 6660 | 7565 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1000V | 120 nF | 270 nF | 330 nF | 330 nF | 470 nF | 680 nF | 1.0 µF | 1.2 µF |
| 1200V | 100 nF | 180 nF | 220 nF | 270 nF | 390 nF | 560 nF | 820 nF | 1.0 µF |
| 1400V | 82 nF | 150 nF | 180 nF | 220 nF | 300 nF | 390 nF | 560 nF | 820 nF |
| 1500V | 82 nF | 150 nF | 180 nF | 200 nF | 270nF | 390 nF | 560 nF | 680 nF |
| 1700V | 56 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 430 nF | 560 nF |
| 2000V | 33 nF | 68 nF | 90 nF | 110 nF | 150nF | 200 nF | 330 nF | 390 nF |
| 2500V | 18 nF | 39 nF | 47 nF | 56 nF | 82 nF | 100 nF | 150 nF | 180 nF |
| 3000V | 12 nF | 27 nF | 33 nF | 39 nF | 56 nF | 68 nF | 90 nF | 120 nF |

Max value for 1 Chip, Double the value for 2 Chips SRMC or SRHD


ORDERING INFORMATION

| - | 4040 | P | 803 | K | H | X | - | - | R | B | - |
|---------------------------|--|------------|--|------------------------------------|--|---|------------------|----------|-------------------|-----------|---|
| STACK | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | FORM | HEIGHT | RESISTOR | PACKAGING | SPECIAL PARAMETERS |
| - SRMC SRHS SRHD | 2225 3040 3640 4040 4055 5550 6660 7565 | P = N2T | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | G = 1000V 1K2 = 1200V 1K4 = 1400V O = 1500V 1K7 = 1700V H = 2000V T = 2500V I = 3000V | X = Nickel Tin (up to 200°C) H = Dipped SnPb (up to 200°C) S = Dipped SAC (up to 200°C) I = Electrolytic SnPb (up to 200°C) F = Palladium-Silver (up to 250°C) Q = Solderable Silver (up to 250°C) | - J L M | - XXX | - R = Resistor | B = Reel | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS (WITHOUT LEADS)



| | 2225 | 3040 | 3640 | 4040 | 4055 | 5550 | 6660 | 7565 |
|------------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Length (L) | 5.60 ± 0.4 | 7.60 ± 0.8 | 9.15 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 | 14.00 ± 1.0 | 16.80 ± 1.0 | 19.10 ± 1.0 |
| Width (W) | 6.35 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 0.8 | 14.00 ± 1.0 | 12.70 ± 1.0 | 15.20 ± 1.0 | 16.50 ± 1.0 |
| Thickness max(T) | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 |
| Termination (P) | Min | 0.25 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| | Max | 1.00 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 |



This document is subject to change without notice.

APPLICATIONS

- Voltage multipliers for X-Ray, Plasma, Electropray...



FEATURES

- Alternative to disc capacitor
- Compact SMD design
- Custom voltage, package size, capacitance value on request
- Polymer and non magnetic termination available
- NPO best electrical performance
- N2T best volumetric capacitance under voltage
- X7R best volumetric capacitance with no DC Bias

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

AGING RATE :
X7R : 2% per decade

Dissipation Factor :
NPO, N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
: ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
1.2Un for 5s with 50mA max charging current

QUICK REFERENCE DATA (MAX)

| | 4010 | | | 4012 | | | 4015 | | | 4017 | | | 4020 | | | 4030 | | | 4040 | | | 5550 | | |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| 8KV | 180 pF | 560 pF | 1.3 nF | 270 pF | 1.0 nF | 2.2 nF | 430 pF | 1.3 nF | 3.6 nF | 510 pF | 1.8 nF | 3.9 nF | 510 pF | 2.0 nF | 5.1 nF | 910 pF | 3.3 nF | 7.5 nF | 1.3 nF | 4.7 nF | 11 nF | 2.4 nF | 8.2 nF | 20 nF |
| 9KV | 150 pF | 390 pF | 910 pF | 220 pF | 680 pF | 1.6 nF | 390 pF | 1.1 nF | 2.7 nF | 430 pF | 1.3 nF | 3.3 nF | 430 pF | 1.6 nF | 3.9 nF | 820 pF | 2.4 nF | 6.2 nF | 1.1 nF | 3.3 nF | 8.2 nF | 2.0 nF | 6.2 nF | 16 nF |
| 10KV | 120 pF | 300 pF | 750 pF | 160 pF | 510 pF | 1.3 nF | 300 pF | 820 pF | 2.2 nF | 360 pF | 1.0 nF | 2.4 nF | 390 pF | 1.2 nF | 3.0 nF | 680 pF | 1.8 nF | 4.3 nF | 910 pF | 2.7 nF | 6.2 nF | 1.6 nF | 4.7 nF | 11 nF |
| 11KV | 91 pF | 240 pF | 510 pF | 130 pF | 390 pF | 910 pF | 220 pF | 680 pF | 1.3 nF | 270 pF | 820 pF | 1.6 nF | 270 pF | 1.0 nF | 2.0 nF | 470 pF | 1.5 nF | 3.0 nF | 620 pF | 2.0 nF | 4.3 nF | 1.2 nF | 3.9 nF | 8.2 nF |
| 12KV | 68 pF | 180 pF | 430 pF | 120 pF | 300 pF | 750 pF | 200 pF | 560 pF | 1.3 nF | 240 pF | 750 pF | 1.5 nF | 240 pF | 910 pF | 1.8 nF | 430 pF | 1.3 nF | 2.7 nF | 560 pF | 1.8 nF | 3.9 nF | 1.1 nF | 3.3 nF | 7.5 nF |
| 13KV | 56 pF | 130 pF | 360 pF | 100 pF | 240 pF | 620 pF | 130 pF | 430 pF | 1.0 nF | 160 pF | 560 pF | 1.2 nF | 200 pF | 750 pF | 1.3 nF | 330 pF | 1.0 nF | 2.2 nF | 430 pF | 1.3 nF | 3.0 nF | 820 pF | 2.7 nF | 6.2 nF |
| 14KV | 47 pF | 110 pF | 270 pF | 82 pF | 200 pF | 510 pF | 130 pF | 360 pF | 820 pF | 150 pF | 470 pF | 1.0 nF | 180 pF | 560 pF | 1.0 nF | 300 pF | 820 pF | 1.8 nF | 390 pF | 1.2 nF | 2.4 nF | 750 pF | 2.2 nF | 4.3 nF |
| 15KV | 39 pF | 91 pF | 240 pF | 75 pF | 160 pF | 430 pF | 110 pF | 300 pF | 750 pF | 130 pF | 390 pF | 910 pF | 160 pF | 470 pF | 910 pF | 270 pF | 680 pF | 1.6 nF | 360 pF | 910 pF | 2.2 nF | 680 pF | 1.8 nF | 3.9 nF |


ORDERING INFORMATION

| 4040 | P | 803 | K | 15 | X | B | - |
|--|-------------------------------|---|------------------------------------|--|--|-----------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 4010 4012 4015 4017 4020 4030 4040 5550 | A = NPO P = N2T Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | 8 = 8KV 9 = 9KV 10 = 10KV 11 = 11KV 12 = 12KV 13 = 13KV 14 = 14KV 15 = 15KV | X = Nickel Tin P = Polymer Tin C = Copper Tin CP = Polymer Copper Tin | B = Reel | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS

| | 4010 | 4012 | 4015 | 4017 | 4020 | 4030 | 4040 | 5550 |
|------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Length (L) | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 0.8 | 14.00 ± 1.0 |
| Width (W) | 2.50 ± 0.8 | 3.00 ± 0.8 | 3.80 ± 0.8 | 4.30 ± 0.8 | 5.10 ± 0.8 | 7.60 ± 1.0 | 10.20 ± 0.8 | 12.70 ± 1.0 |
| Thickness max(T) | 2.40 | 3.00 | 3.80 | 4.30 | 4.30 | 4.30 | 4.30 | 4.30 |
| Termination (P) | Min | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| | Max | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 |



This document is subject to change without notice.



APPLICATIONS

- Magnetic resonance imaging
- Medical test equipment
- Laboratory analyze system
- Audio amplifier
- Particle accelerator



FEATURES

- Non magnetic material : precious metal inner electrode, copper barrier
- All size/voltage available in non magnetic form
- Custom voltage, package size, capacitance value on request
- Tested in accordance to AEC-Q200 methodology
- Magnetic properties tested
- Polymer termination available

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

AGING RATE :
X7R : 2% per decade

Dissipation Factor :
NPO, N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
: ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U ≤ 200V | U + 250V 200 < U ≤ 500 | 1.5U 500 < U < 1000 | 1.2U U ≥ 1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0402 | | | 0504 | | | 0603 | | | 0805 | | | 1206 | | | 1210 | | | 1808 | | |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 1.0 pF | 6.8 pF | 0.4 pF | 4.7 pF | 10 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 4.7 pF | 10 pF |
| 25V | 270 pF | 1.2 nF | 8.2 nF | 1.5 nF | 5.6 nF | 39 nF | 1.5 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 10 nF | 39 nF | 220 nF | 15 nF | 68 nF | 390 nF | 22 nF | 82 nF | 470 nF |
| 50V | 270 pF | 1.2 nF | 8.2 nF | 1.5 nF | 5.6 nF | 39 nF | 1.2 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 10 nF | 39 nF | 220 nF | 15 nF | 68 nF | 390 nF | 22 nF | 82 nF | 470 nF |
| 100V | 270 pF | 1.2 nF | 8.2 nF | 1.5 nF | 5.6 nF | 39 nF | 1.2 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 10 nF | 39 nF | 220 nF | 15 nF | 68 nF | 390 nF | 22 nF | 82 nF | 470 nF |
| 200V | 270 pF | 1.0 nF | 6.8 nF | 1.2 nF | 5.6 nF | 39 nF | 1.2 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 10 nF | 39 nF | 220 nF | 15 nF | 68 nF | 390 nF | 22 nF | 82 nF | 470 nF |
| 500V | 180 pF | 330 pF | 1.2 nF | 1.0 nF | 1.8 nF | 6.8 nF | 1.0 nF | 1.8 nF | 6.8 nF | 3.3 nF | 6.8 nF | 27 nF | 8.2 nF | 22 nF | 82 nF | 15 nF | 39 nF | 180 nF | 18 nF | 47 nF | 220 nF |
| 1000V | | | | | | | 220 pF | 390 pF | 1.2 nF | 820 pF | 1.8 nF | 5.6 nF | 2.7 nF | 5.6 nF | 15 nF | 6.8 nF | 15 nF | 47 nF | 6.8 nF | 15 nF | 39 nF |
| 2000V | | | | | | | | | | 150 pF | 270 pF | 820 pF | 560 pF | 820 pF | 2.7 nF | 1.5 nF | 2.7 nF | 8.2 nF | 1.2 nF | 2.2 nF | 8.2 nF |
| 3000V | | | | | | | | | | | | | 180 pF | 330 pF | 1.0 nF | 470 pF | 1.0 nF | 2.7 nF | 470 pF | 1.0 nF | 3.3 nF |

| | 1825 | | | 2220 | | | 2225 | | | 3033 | | | 3640 | | | 4040 | | | 5440 | | |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 10 pF | 33 pF | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF |
| 50V | 82 nF | 270 nF | 1.8 μF | 82 nF | 330 nF | 1.8 μF | 100 nF | 390 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF | 220 nF | 820 nF | 5.6 μF | 270 nF | 1.0 μF | 5.6 μF | 330 nF | 1.2 μF | 8.2 μF |
| 100V | 82 nF | 270 nF | 1.8 μF | 82 nF | 330 nF | 1.8 μF | 100 nF | 390 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF | 220 nF | 820 nF | 5.6 μF | 270 nF | 1.0 μF | 5.6 μF | 330 nF | 1.2 μF | 8.2 μF |
| 200V | 82 nF | 270 nF | 1.8 μF | 82 nF | 330 nF | 1.8 μF | 100 nF | 390 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF | 220 nF | 820 nF | 5.6 μF | 270 nF | 1.0 μF | 5.6 μF | 330 nF | 1.2 μF | 8.2 μF |
| 500V | 68 nF | 180 nF | 820 nF | 68 nF | 180 nF | 820 nF | 82 nF | 220 nF | 1.0 μF | 150 nF | 390 nF | 1.8 μF | 220 nF | 560 nF | 2.7 μF | 270 nF | 680 nF | 2.7 μF | 330 nF | 1.0 μF | 3.9 μF |
| 630V | 56 nF | 150 nF | 560 nF | 56 nF | 150 nF | 560 nF | 68 nF | 180 nF | 820 nF | 120 nF | 330 nF | 1.2 μF | 180 nF | 470 nF | 1.8 μF | 220 nF | 560 nF | 2.2 μF | 270 nF | 680 nF | 2.7 μF |
| 1000V | 33 nF | 82 nF | 330 nF | 39 nF | 100 nF | 330 nF | 47 nF | 120 nF | 470 nF | 82 nF | 220 nF | 820 nF | 120 nF | 330 nF | 1.2 μF | 120 nF | 330 nF | 1.2 μF | 180 nF | 470 nF | 1.8 μF |
| 2000V | 10 nF | 15 nF | 56 nF | 12 nF | 15 nF | 68 nF | 15 nF | 18 nF | 82 nF | 27 nF | 39 nF | 180 nF | 39 nF | 56 nF | 270 nF | 47 nF | 56 nF | 270 nF | 56 nF | 82 nF | 390 nF |
| 3000V | 2.7 nF | 5.6 nF | 22 nF | 2.7 nF | 6.8 nF | 27 nF | 3.9 nF | 8.2 nF | 33 nF | 6.8 nF | 15 nF | 56 nF | 10 nF | 22 nF | 82 nF | 12 nF | 27 nF | 100 nF | 15 nF | 33 nF | 120 nF |
| 10KV | 220 pF | 270 pF | | 270 pF | 470 pF | 1.2 nF | 330 pF | 680 pF | 1.8 nF | 680 pF | 1.2 nF | 3.3 nF | 1.0 nF | 1.8 nF | 4.7 nF | 1.0 nF | 1.8 nF | 5.6 nF | 1.5 nF | 2.7 nF | 6.8 nF |


ORDERING INFORMATION

| 0603 | A | 103 | J | B | C | B | - |
|--|-------------------------------|---|--|---|---|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0402 0504 0603 0805 1206 1210 1808 1812 1825 2220 2225 2825 3033 3640 4040 5440 | A = NPO P = N2T Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | X = 25V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V F = 630V G = 1000V H = 2000V I = 3000V 10 = 10000V | C = Copper Tin (Non magnetic) CP = Copper Polymer Tin (Non magnetic) | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |



APPLICATIONS

- Improved reliability termination
- Whisker free
- Space and medical and oil application
- PME manufactured or AEC-Q200 BME sourced components
- High Reliability testing, burn-in, screening available according to MIL-PRF-55681, ESCC3009 or specific reliability program



FEATURES

- Choice between :
- Electrolytical SnPb (10% min Pb)
- Dipped SnPb (Sn62 Pb36 Ag2)
- Dipped SAC (Sn96.5 Ag3 Cu0.5) ROHS
- Other size/voltage available on demand
- Other passive/active component dipping on demand

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/C°
X7R : ± 15% with 0Vdc applied

AGING RATE :
X7R : 2% per decade

Dissipation Factor :
NPO, N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
 : ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U ≤ 200V | U + 250V 200 < U ≤ 500 | 1.5U 500 < U < 1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0201 | | 0402 | | | 0603 | | | 0805 | | | 1206 | | | 1210 | | | 1812 | | | 2220 | | | |
|--------------|---------------|---------------|---------------|--------|---------------|---------------|--------|---------------|--------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| | NPO | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | |
| Min | | | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 1.0 pF | 6.8 pF | 0.4 pF | 4.7 pF | 10 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 33 pF |
| 6.3V | | <i>100 nF</i> | <i>2.2 nF</i> | 1.2 nF | <i>1 μF</i> | <i>10 nF</i> | 5.6 nF | <i>4.7 μF</i> | <i>33 nF</i> | 15 nF | <i>10 μF</i> | <i>220 nF</i> | 39 nF | <i>22 μF</i> | <i>100 nF</i> | 68 nF | <i>47 μF</i> | <i>220 nF</i> | 120 nF | <i>33 μF</i> | <i>470 nF</i> | 330 nF | <i>47 μF</i> | <i>47 μF</i> |
| 10V | | | <i>2.2 nF</i> | 1.2 nF | <i>1 μF</i> | <i>10 nF</i> | 5.6 nF | <i>2.2 μF</i> | <i>33 nF</i> | 15 nF | <i>10 μF</i> | <i>220 nF</i> | 39 nF | <i>22 μF</i> | <i>100 nF</i> | 68 nF | <i>22 μF</i> | <i>220 nF</i> | 120 nF | <i>33 μF</i> | <i>470 nF</i> | 330 nF | <i>47 μF</i> | <i>47 μF</i> |
| 16V | | <i>10 nF</i> | <i>2.2 nF</i> | 1.2 nF | <i>470 nF</i> | <i>10 nF</i> | 5.6 nF | <i>1.0 μF</i> | <i>33 nF</i> | 15 nF | <i>10 μF</i> | <i>220 nF</i> | 39 nF | <i>10 μF</i> | <i>100 nF</i> | 68 nF | <i>22 μF</i> | <i>220 nF</i> | 120 nF | <i>33 μF</i> | <i>470 nF</i> | 330 nF | <i>47 μF</i> | <i>47 μF</i> |
| 25V | <i>1.0 nF</i> | <i>6.8 nF</i> | <i>2.2 nF</i> | 1.2 nF | <i>220 nF</i> | <i>10 nF</i> | 5.6 nF | <i>1.0 μF</i> | <i>33 nF</i> | 15 nF | <i>4.7 μF</i> | <i>220 nF</i> | 39 nF | <i>10 μF</i> | <i>120 nF</i> | 68 nF | <i>22 μF</i> | <i>220 nF</i> | 120 nF | <i>22 μF</i> | <i>470 nF</i> | 330 nF | <i>47 μF</i> | <i>47 μF</i> |
| 50V | <i>220 pF</i> | <i>1.0 nF</i> | <i>1.5 nF</i> | 1.2 nF | <i>100 nF</i> | <i>10 nF</i> | 5.6 nF | <i>1.0 μF</i> | <i>33 nF</i> | 15 nF | <i>4.7 μF</i> | <i>220 nF</i> | 39 nF | <i>10 μF</i> | <i>100 nF</i> | 68 nF | <i>10 μF</i> | <i>220 nF</i> | 120 nF | <i>6.8 μF</i> | <i>470 nF</i> | 330 nF | <i>22 μF</i> | <i>22 μF</i> |
| 63V | | | <i>1.0 nF</i> | 1.2 nF | 10 nF | <i>10 nF</i> | 5.6 nF | <i>100 nF</i> | <i>33 nF</i> | 15 nF | <i>2.2 μF</i> | <i>100 nF</i> | 39 nF | <i>2.2 μF</i> | <i>100 nF</i> | 68 nF | <i>10 μF</i> | <i>100 nF</i> | 120 nF | <i>2.2 μF</i> | <i>330 nF</i> | 330 nF | <i>10 μF</i> | <i>10 μF</i> |
| 100V | | | <i>1.0 nF</i> | 1.2 nF | 10 nF | <i>10 nF</i> | 5.6 nF | <i>100 nF</i> | <i>33 nF</i> | 15 nF | <i>2.2 μF</i> | <i>100 nF</i> | 39 nF | <i>2.2 μF</i> | <i>100 nF</i> | 68 nF | <i>4.7 μF</i> | <i>100 nF</i> | 120 nF | <i>2.2 μF</i> | <i>330 nF</i> | 330 nF | <i>10 μF</i> | <i>10 μF</i> |
| 200V | | | <i>330 pF</i> | 1.0 nF | 6.8 nF | <i>2.2 nF</i> | 5.6 nF | 39 nF | 10 nF | 15 nF | 470 nF | <i>22 nF</i> | 39 nF | 220 nF | <i>47 nF</i> | 68 nF | <i>1.0 μF</i> | <i>100 nF</i> | 120 nF | <i>1.0 μF</i> | <i>150 nF</i> | 330 nF | <i>2.2 μF</i> | <i>2.2 μF</i> |
| 250V | | | <i>330 pF</i> | 1.0 nF | 5.6 nF | <i>2.2 nF</i> | 5.6 nF | 27 nF | 10 nF | 15 nF | 82 nF | <i>22 nF</i> | 39 nF | 220 nF | <i>47 nF</i> | 68 nF | 680 nF | 100 nF | 120 nF | <i>1.0 μF</i> | <i>150 nF</i> | 330 nF | <i>2.2 μF</i> | <i>2.2 μF</i> |
| 500V | | | <i>180 pF</i> | 330 pF | 1.2 nF | 1.0 nF | 1.8 nF | 6.8 nF | 3.3 nF | 6.8 nF | 33 nF | 8.2 nF | 22 nF | 82 nF | 15 nF | 39 nF | 180 nF | 33 nF | 82 nF | 470 nF | 68 nF | 180 nF | <i>1.0 μF</i> | <i>1.0 μF</i> |
| 630V | | | | | | 560 pF | 1.2 nF | 3.9 nF | 2.2 nF | 4.7 nF | 33 nF | 6.8 nF | 15 nF | 56 nF | 12 nF | 33 nF | 120 nF | 27 nF | 68 nF | 270 nF | 56 nF | 150 nF | <i>1.0 μF</i> | <i>1.0 μF</i> |
| 1000V | | | | | | 220 pF | 390 pF | 1.2 nF | 820 pF | 1.8 nF | 5.6 nF | 2.7 nF | 5.6 nF | 27 nF | 6.8 nF | 15 nF | 68 nF | 15 nF | 39 nF | 150 nF | 39 nF | 100 nF | <i>470 nF</i> | <i>470 nF</i> |

Max values italic obtained with BME parts

ORDERING INFORMATION

| 0603 | A | 103 | J | B | I | B | - | - |
|--|-------------------------------|--|---|---|--|----------------------|---------------------|--|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | PACKAGING | SPECIAL PARAMETERS |
| 0201 0402 0603 0805 1206 1210 1812 2220 | A = NPO P = N2T Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0,25pF D = ± 0,5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | R = 6.3V Q = 10V J = 16V X = 25V Z = 35V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V F = 630V G = 1000V | H = Dipped SnPb S = Dipped SAC I = Electrolytic SnPb | B = Reel V = Bulk | - = PME BM = BME | - D55681 = iec MIL-PRF55681 D3009 = iec ESCC3009 Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, ceramic tolerance contact us

SMD High Temperature Class I


10V-2000V 200°C-250°C



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : timing, precision circuitry, filtering for High Temperature environnement



FEATURES

- Ultra stable temperature compensating classe I ceramic up to 250°C
- Robust design for High Temperature durability
- ROHS Tin Termination or Non ROHS SnPb for use up to 200°C (use HMP soldering)
- Gold/Silver-Palladium/Solderable Silver for use up to 250°C (use High-Temperature Epoxy)
- Custom voltage, package size, capacitance value on request
- 168H/125°C Burn-In option for maximum reliability

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 250°C

TEMPERATURE COEFFICIENT :
± 30ppm with 0Vdc applied

DISSIPATION FACTOR :
≤ 1.10-3 at 1Vrms and 1MHz for values ≤ 1000pF
≤ 1.10-3 at 1Vrms and 1KHz for values > 1000pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
200°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less
250°C/Un 5x10³ MOhm or 50 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0402 | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2525 | 2825 | 3033 | 3640 | 4040 | 5440 | 6660 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Min | 0.1 pF | 0.1 pF | 0.1 pF | 0.4 pF | 0.4 pF | 1.0 pF | 1.0 pF | 1.0 pF | 1.0 pF | 1.0 pF | 1.0 pF | 4.7 pF | 10 pF | 10 pF | 10 pF | 10 pF | 10 pF |
| 10V | 2.2 nF | 27 nF | 47 nF | 220 nF | 220 nF | 22 nF | 220 nF | 100 nF | 470 nF | 100 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF | 560 nF |
| 25V | 1.5 nF | 10 nF | 47 nF | 220 nF | 150 nF | 22 nF | 220 nF | 100 nF | 470 nF | 100 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF | 560 nF |
| 50V | 330 pF | 2.2 nF | 10 nF | 22 nF | 47 nF | 22 nF | 100 nF | 82 nF | 150 nF | 100 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF | 560 nF |
| 63V | 330 pF | 2.2 nF | 10 nF | 22 nF | 47 nF | 22 nF | 100 nF | 82 nF | 150 nF | 100 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF | 560 nF |
| 100V | 220 pF | 1.2 nF | 3.9 nF | 10 nF | 15 nF | 22 nF | 33 nF | 82 nF | 82 nF | 100 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF | 560 nF |
| 200V | 180 pF | 1.0 nF | 3.3 nF | 8.2 nF | 15 nF | 18 nF | 33 nF | 68 nF | 68 nF | 82 nF | 100 nF | 120 nF | 150 nF | 220 nF | 270 nF | 330 nF | 560 nF |
| 250V | | 560 pF | 2.2 nF | 6.8 nF | 12 nF | 15 nF | 27 nF | 56 nF | 56 nF | 68 nF | 82 nF | 82 nF | 120 nF | 180 nF | 220 nF | 270 nF | 470 nF |
| 500V | | 150 pF | 560 pF | 1.8 nF | 4.7 nF | 4.7 nF | 12 nF | 27 nF | 27 nF | 33 nF | 39 nF | 47 nF | 68 nF | 82 nF | 100 nF | 120 nF | 270 nF |
| 630V | | 68 pF | 330 pF | 1.0 nF | 2.7 nF | 2.7 nF | 8.2 nF | 18 nF | 18 nF | 27 nF | 27 nF | 33 nF | 47 nF | 68 nF | 68 nF | 100 nF | 180 nF |
| 1000V | | | 150 pF | 560 pF | 1.5 nF | 1.2 nF | 3.9 nF | 10 nF | 12 nF | 15 nF | 18 nF | 18 nF | 27 nF | 39 nF | 47 nF | 56 nF | 120 nF |
| 1500V | | | | 180 pF | 470 pF | 470 pF | 1.2 nF | 2.7 nF | 2.7 nF | 3.9 nF | 4.7 nF | 4.7 nF | 6.8 nF | 10 nF | 12 nF | 15 nF | 27 nF |
| 2000V | | | | 82 pF | 220 pF | 220 pF | 680 pF | 1.8 nF | 1.8 nF | 2.2 nF | 2.7 nF | 3.3 nF | 4.7 nF | 6.8 nF | 8.2 nF | 10 nF | 18 nF |
| 3000V | | | | | | | | | | | | 1.2 nF | 1.8 nF | 2.7 nF | 2.7 nF | 3.9 nF | 6.8 nF |

Max values italic obtained with BME parts


ORDERING INFORMATION

| H | 0603 | A | 101 | J | B | F | B | D03 |
|------------------|--|------------|---|---|---|--|----------------------|---|
| SERIE | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| High-Temperature | 0402 0603 0805 1206 1210 1808 1812 1825 2220 2225 2525 2825 3033 3640 4040 5440 6660 | A = NPO | Expressed in picrofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0,5% if > 10pF and ±0,05pF if < 10pF B = ± 0.1pF C = ± 0,25pF D = ± 0,5pF E = 0.1% F = ± 1% G = ± 2% J = ± 5% K = ± 10% | Q = 10V J = 16V X = 25V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V F = 630V G = 1000V O = 1500V H = 2000V I = 2000V | X = Nickel Tin (up to 200°C) H = Dipped SnPb (up to 200°C) S = Dipped SAC (up to 200°C) I = Electrolytic SnPb (up to 200°C) F = Palladium-Silver (up to 250°C) W = Nickel Gold (up to 250°C) Q = Solderable Silver (up to 250°C) | B = Reel V = Bulk | - D03 = Burn-In 168H/125°C BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS

| | 0402 | 0603 | 0805 | 1111 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 | 2525 | 2825 | 3033 | 3640 | 4040 | 5440 |
|------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|
| Length (L) | 1.00 ± 0.1 | 1.60 ± 0.2 | 2.00 ± 0.2 | 2.80 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 4.60 ± 0.3 | 4.60 ± 0.4 | 5.60 ± 0.4 | 5.60 ± 0.4 | 6.35 ± 0.4 | 7.10 ± 0.4 | 7.60 ± 0.4 | 9.15 ± 0.8 | 10.20 ± 0.8 | 13.70 ± 1.0 |
| Width (W) | 0.50 ± 0.1 | 0.80 ± 0.2 | 1.25 ± 0.2 | 2.80 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 8.40 ± 0.4 | 10.20 ± 0.8 | 10.20 ± 0.8 | 10.20 ± 1.0 |
| Thickness max(T) | 0.60 | 0.92 | 1.40 | 2.60 | 1.70 | 2.50 | 2.20 | 3.30 | 3.60 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| Termination (P) | Min | 0.10 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.50 | 0.80 | 0.80 | 0.80 |
| | Max | 0.40 | 0.40 | 0.70 | 0.70 | 0.70 | 0.80 | 0.80 | 0.80 | 0.80 | 1.00 | 1.00 | 1.00 | 1.20 | 1.50 | 1.50 | 1.50 |




This document is subject to change without notice.




TYPICAL CHARACTERISTICS


NPO Temperature coefficient of capacitance

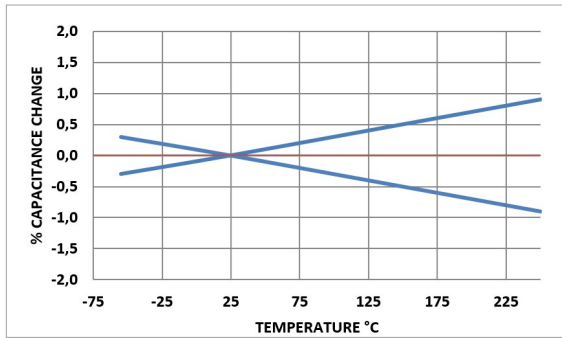


NPO Insulation resistance vs. temperature

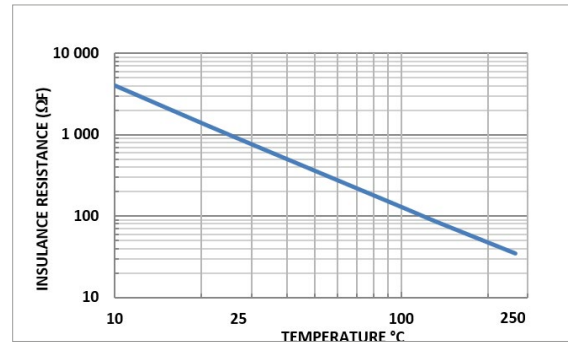


NPO Aging rate

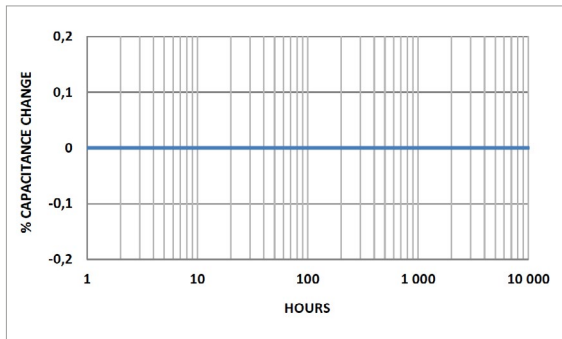


NPO Voltage coefficient of capacitance

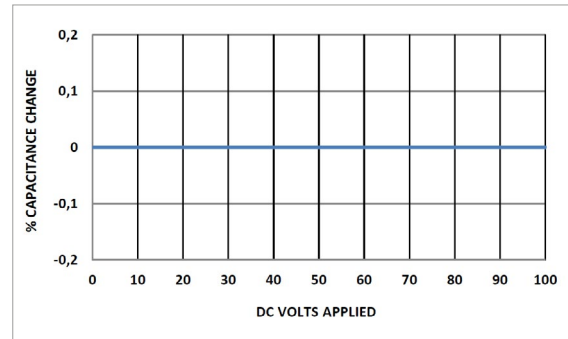

NPO Change of Capacitance with Frequency

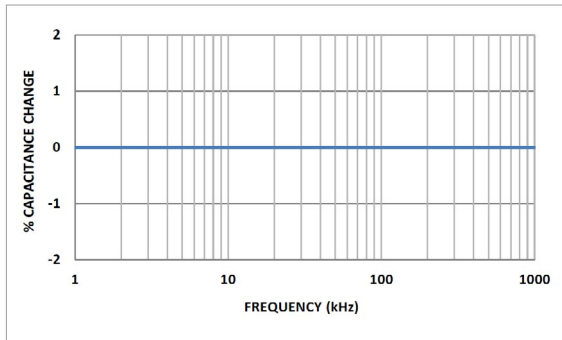

NPO Dissipation factor vs. frequency

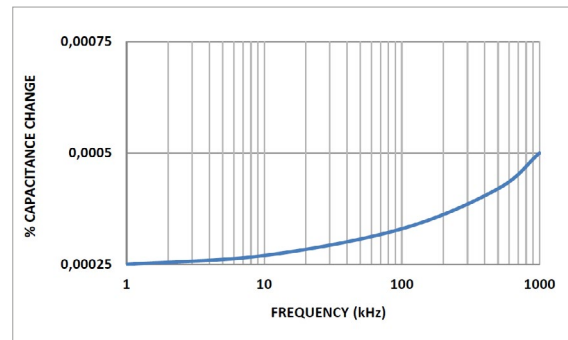

SMD High Temperature Class II


10V-2000V 150°C-250°C



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Typical uses : timing, precision circuitry, filtering for High Temperature environment



FEATURES

- Robust design for High Temperature durability
- ROHS Tin Termination or Non ROHS SnPb for use up to 200°C
- Gold/Silver-Palladium/Solderable Silver for use up to 250°C
- Custom voltage, package size, capacitance value on request
- 168H/125°C Burn-In option for maximum reliability
- Extended range for low time usage with reasonable reliability

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 250°C

TEMPERATURE COEFFICIENT :
± 15% with 0Vdc applied on -55°C/125°C
for 125°C/250°C range, refer to chart

DISSIPATION FACTOR :
≤ 2.5% at 1kHz for C ≥ 100pF

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
200°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less
250°C/Un 5x10³ MOhm or 50 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 200°C | 200°C | 200°C | 200°C | 200°C | 200°C | 200°C | 200°C | 200°C | 200°C | 200°C | 200°C | 250°C | 250°C | 250°C | 250°C | 250°C | 250°C |
| Min | 2.2 pF | 6.8 pF | 10 pF | 10 pF | 10 pF | 33 pF | 2.2 pF | 6.8 pF | 10 pF | 10 pF | 10 pF | 33 pF | 2.2 pF | 6.8 pF | 10 pF | 10 pF | 10 pF | 33 pF |
| 10V | 100 nF | 1.0 μF | 2.2 μF | 10 μF | 4.7 μF | 22 μF | 1.0 μF | 4.7 μF | 10 μF | 22 μF | 6.8 μF | 47 μF | 39 nF | 100 nF | 220 nF | 390 nF | 820 nF | 1.8 μF |
| 25V | 39 nF | 100 nF | 220 nF | 390 nF | 820 nF | 1.8 μF | 100 nF | 1.0 μF | 2.2 μF | 10 μF | 4.7 μF | 22 μF | 18 nF | 68 nF | 150 nF | 270 nF | 560 nF | 1.2 μF |
| 50V | 27 nF | 82 nF | 220 nF | 330 nF | 820 nF | 1.8 μF | 39 nF | 100 nF | 220 nF | 390 nF | 820 nF | 1.8 μF | 3.9 nF | 15 nF | 47 nF | 120 nF | 270 nF | 560 nF |
| 63V | 18 nF | 68 nF | 180 nF | 270 nF | 560 nF | 1.2 μF | 39 nF | 100 nF | 220 nF | 390 nF | 820 nF | 1.8 μF | 1.8 nF | 8.2 nF | 27 nF | 68 nF | 180 nF | 470 nF |
| 100V | 6.8 nF | 27 nF | 82 nF | 180 nF | 330 nF | 820 nF | 22 nF | 82 nF | 180 nF | 330 nF | 680 nF | 1.5 μF | 1.2 nF | 5.6 nF | 15 nF | 47 nF | 120 nF | 330 nF |
| 200V | 1.2 nF | 5.6 nF | 15 nF | 47 nF | 120 nF | 330 nF | 5.6 nF | 22 nF | 68 nF | 150 nF | 330 nF | 680 nF | | 1.5 nF | 4.7 nF | 12 nF | 33 nF | 82 nF |
| 250V | 680 pF | 2.7 nF | 10 nF | 27 nF | 82 nF | 220 nF | 2.7 nF | 12 nF | 39 nF | 100 nF | 220 nF | 560 nF | | 820 pF | 2.7 nF | 8.2 nF | 22 nF | 68 nF |
| 500V | | | 1.5 nF | 4.7 nF | 12 nF | 39 nF | 470 pF | 2.2 nF | 6.8 nF | 18 nF | 39 nF | 100 nF | | | 470 pF | 1.5 nF | 4.7 nF | 15 nF |
| 630V | | | | 820 pF | 2.7 nF | 8.2 nF | | 1.2 nF | 3.9 nF | 10 nF | 27 nF | 82 nF | | | | | | 2.7 nF |
| 1000V | | | | | 2.7 nF | 8.2 nF | | | 1.2 nF | 3.3 nF | 10 nF | 27 nF | | | | | | 1.0 nF |
| 1500V | | | | | 1.0 nF | 3.3 nF | | | | | 3.9 nF | 12 nF | | | | | | |
| 2000V | | | | | | 1.2 nF | | | | | 2.2 nF | 5.6 nF | | | | | | |

Max values italic obtained with BME parts


ORDERING INFORMATION

| H | 0603 | Y | 101 | J | B | W | B | D03 |
|------------------|--|------------|---|------------------------------------|---|--|----------------------|---|
| SERIE | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| High-Température | 0603 0805 1206 1210 1812 2220 | Y= X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 134OR0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | Q = 10V J = 16V X = 25V Z = 35V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V F = 630V G = 1000V O = 1500V H = 2000V | X = Nickel Tin (up to 200°C) H = Dipped SnPb (up to 200°C) S = Dipped SAC (up to 200°C) I = Electrolytic SnPb (up to 200°C) F = Palladium-Silver (up to 250°C) W = Nickel Gold (up to 250°C) Q = Solderable Silver (up to 250°C) | B = Reel V = Bulk | - D03 = Burn-In 168H/125°C BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

DIMENSIONS IN MILLIMETERS

| | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 |
|------------------|------------|--------------|--------------|--------------|--------------|--------------|
| Length (L) | 1.60 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.60 ± 0.3 | 5.60 ± 0.4 |
| Width (W) | 0.80 ± 0.2 | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 3.20 ± 0.2 | 5.10 ± 0.4 |
| Thickness max(T) | 0.92 | 1.40 | 1.70 | 2.50 | 3.30 | 4.00 |
| Termination (P) | Min Max | 0.25 0.40 | 0.25 0.70 | 0.25 0.70 | 0.25 0.80 | 0.25 0.80 |




This document is subject to change without notice.




TYPICAL CHARACTERISTICS


HT Classe II Temperature coefficient of capacitance

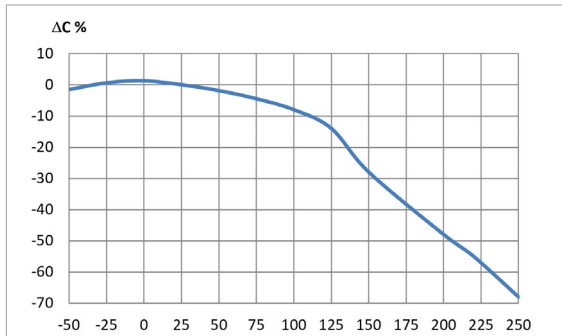


HT Classe II Insulation resistance vs. temperature

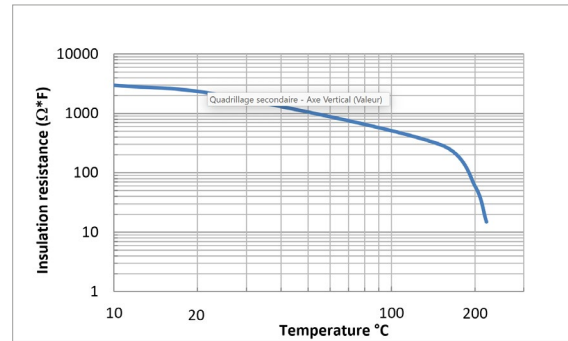


HT Classe II Aging rate

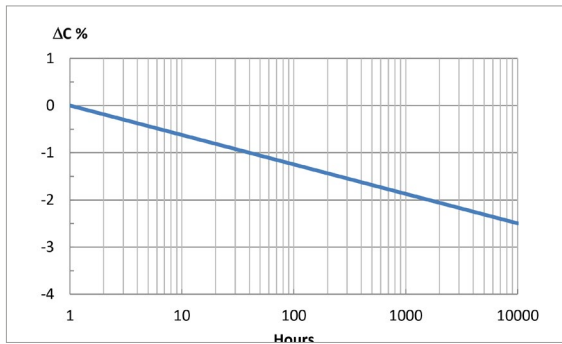

HT Classe II Voltage coefficient of capacitance

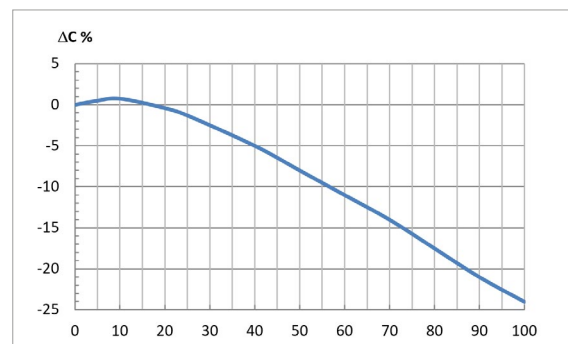

HT Classe II DF vs. temperature

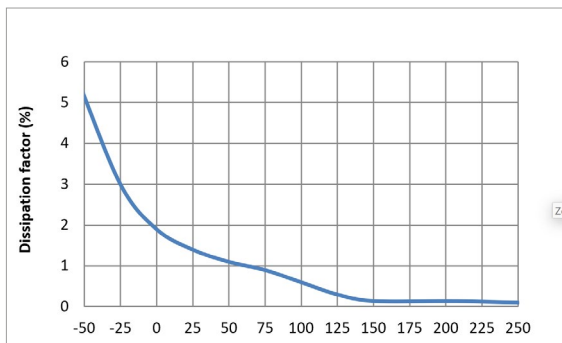

Safety Certified MLCC


X1/Y2 et X2 Class



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

DESCRIPTION

Safety certified capacitors are designed for surge or lightning immunity in modern facsimile and other equipments. The capacitors of FK series are class X1/Y2 compliant, and the capacitors of FH series are class X2 compliant respectively. The green type capacitors in FK/FH series are manufactured by using environmentally friendly materials without lead or cadmium. The terminations are composed of plated nickel and pure tin to feature the superiority of leaching resistance during soldering.



APPLICATIONS

- Modem
- Facsimile
- Telephone
- Other electronic equipment for lighting or surge protection and isolation

FEATURES

- High reliability and stability.
- Small size and high capacitance
- Safety standard approval by :
 - EN 60384-14 : 2013/A1 : 2016
 - IEC60384-14:2013/AMD1:2016
 - UL 60384-14(Ed 2.0)UL 62368-1 (2nd Edition)
- Certificate number :
 - R 50041666 & R 50359148 by TUV.
 - E346791(FOWX2/8) by UL, E231248 by UL
 - CQC20001247849 by CQC (FK series)
 - CQC20001247848 by CQC (FH series)
- Licenses :
 - ENEC-03020 (FK series)
 - ENEC-03021 (FH series)
- RoHS and HALOGEN compliant
- Manufactured by PDC

ELECTRICAL PARAMETERS


| DIELECTRIC | COG | X7R |
|----------------------------------|---|--|
| Size | 1808, 1812 2211 | 1808, 1812, 2211, 2220 |
| Rated Voltage | 250 Vac | |
| Capacitance Range | X1/Y2 Class (Impulse 6KV) : 4pF - 100pF X1/Y2 Class (Impulse 5KV) : 3pF - 720pF X2 Class : 3pF - 1000pF | X1/Y2 Class : 100pF-4700pF X2 Class : 56000pF |
| Capacitance Tolerance | Cap.<10pF : D (±0.5pF) 10pF≤Cap : F (±1%), G (±2%), J (±5%),K (±10%), M (±20%) | J (±5%) K (±10%) M (±20%) |
| DF | Cap.<30pF : Q≥400+20C Cap.≥30pF : Q≥1000 | ≤2.5% |
| Capacitance & DF- Test Condition | Measured at the condition of 30-70% related humidity. | |
| | For 25°C at ambient temperature | Preconditioning for Class II MLCC : Perform a heat treatment at 150 ±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement |
| Insulation Resistance | ≥100GΩ or RxC≥1000Ω-F, whichever is smaller | ≥10GΩ or RxC≥5000Ω-F, whichever is smaller |
| Operating Temperature | -55°C to +125°C | |
| Temperature coefficient | ±30ppm/°C | ±15% |
| Termination | Cu or Ag/Ni/Sn (lead-free termination) | |

ORDERING INFORMATION

| FK | 0805 | Y | 103 | K | L | B | G |
|---|--------------------------------------|--------------------|--|--|---------------------------------|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | PACKAGING | SPECIAL |
| FK = Safety X1 & Y2 Series FH = Safety X2 Series | 1206 1808 1812 2211 2220 | A = COG Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF | D = ± 0.50pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | T = 2.5KV L = 5KV 6 = 6KV | B = Reel V = Bulk | G = RoHS Compliant H = High Reliability Q = Anti-Arcing E = Anti Bending Z = Anti-Arcing + Anti-Bending Dxx = Reliability spec Exx = Sorting spec |

DIMENSIONS IN MILLIMETERS

| | | 1206 | 1808 | 1812 | 2211 | 2220 |
|-------------------|-----|------------|----------------|----------------|------------|------------|
| Length (L) | | 3.30 ±0.40 | 4.50 +0.6/-0.3 | 4.50 +0.6/-0.3 | 5.70 ±0.50 | 5.70 ±0.50 |
| Width (W) | | 1.60 ±0.20 | 2.00 ±0.30 | 3.20 ±0.40 | 2.80 ±0.40 | 5.00 ±0.50 |
| Thickness max (T) | | 1.35 | 2.20 | 2.80 | 3.10 | 3.10 |
| Termination (P) | Min | 0.25 | 0.25 | 0.25 | 0.30 | 0.30 |
| | Max | 0.75 | 0.75 | 0.75 | 0.90 | 0.90 |



This document is subject to change without notice.



CAPACITANCE RANGE

| Class | | X1/Y2 (FK series) | | | | | | | | X2 (FH series) | | | | | |
|---------------|--------|-------------------------------|------|------|------|------|------|------|------|----------------|------|------|------|------|-------|
| Rated Voltage | | 250Vac | | | | | | | | | | | | | |
| Certificated | | TUV / UL / CQC (IEC 60384-14) | | | | | | | | | | | | | |
| Dielectric | | COG | | | | X7R | | | | COG | | X7R | | | X7R |
| Size | | 1808 | 1812 | 2211 | 2211 | 1808 | 1812 | 2211 | 2220 | 1808 | 1812 | 1808 | 1812 | 2220 | 1206 |
| Impulse | | 5KV | | | 6KV | 5KV | | | | 2.5KV | | | | | 2.5KV |
| Code | Cap | | | | | | | | | | | | | | |
| 3R0 | 3.0 pF | R | | | | | | | | | R | | | | |
| 3R3 | 3.3 pF | R | | | | | | | | | | | | | |
| 4R0 | 4.0 pF | R | | W | W | | | | | | R | | | | |
| 4R7 | 4.7 pF | R | | W | W | | | | | | | | | | |
| 5R0 | 5.0 pF | R | | W | W | | | | | | R | | | | |
| 5R6 | 5.6 pF | R | | W | W | | | | | | | | | | |
| 6R0 | 6.0 pF | R | | W | W | | | | | | R | | | | |
| 6R8 | 6.8 pF | R | | W | W | | | | | | | | | | |
| 7R0 | 7.0 pF | R | | W | W | | | | | | R | | | | |
| 8R0 | 8.0 pF | R | | W | W | | | | | | R | | | | |
| 8R2 | 8.2 pF | R | | W | W | | | | | | | | | | |
| 9R0 | 9.0 pF | R | | | | | | | | | R | | | | |
| 100 | 10 pF | R | P | W | W | | | | | | R | P | | | |
| 120 | 12 pF | R | P | W | W | | | | | | R | P | | | |
| 150 | 15 pF | R | P | W | W | | | | | | R | P | | | |
| 180 | 18 pF | R | P | W | W | | | | | | R | | | | |
| 220 | 22 pF | R | P | W | W | | | | | | R | P | | | |
| 270 | 27 pF | R | P | W | W | | | | | | R | P | | | |
| 330 | 33 pF | R | P | W | W | | | | | | R | P | | | |
| 390 | 39 pF | T | P | W | W | | | | | | T | P | | | |
| 470 | 47 pF | T | P | W | W | | | | | | T | P | | | |
| 560 | 56 pF | T | P | W | W | | | | | | T | P | | | |
| 680 | 68 pF | T | P | W | Y | | | | | | T | P | | | |
| 820 | 82 pF | T | P | W | Y | | | | | | T | P | | | |
| 101 | 100 pF | W | P | W | Z | T* | | T* | | | W | P | | | P |
| 121 | 120 pF | W | P | Y | | T* | | T* | | | W | P | | | P |
| 131 | 130 pF | W | P | | | | | T* | | | | | | | P |
| 151 | 150 pF | W | P | Y | | T* | T* | T* | | | W | P | T | | P |
| 161 | 160 pF | W | P | Y | | T* | | | W* | | | | T | | P |
| 181 | 180 pF | W | P | Y | | T* | T* | T* | W* | | W | P | T | | P |
| 221 | 220 pF | W | W | Y | | T* | T* | T* | W* | | W | P | T | | P |
| 271 | 270 pF | W | W | Y | | W* | T* | | W* | | W | R | T | T | P |
| 301 | 300 pF | | W | | | | | | | | | | T | T | P |
| 331 | 330 pF | | W | Y | | W* | T* | T* | W* | | W | R | T | T | P |
| 391 | 390 pF | | W | Y | | W* | T* | T* | W* | | W | R | T | T | P |
| 471 | 470 pF | | W | Y | | W* | T* | W* | W* | | W | T | T | T | P |
| 561 | 560 pF | | | Y | | W* | T* | W* | W* | | W | W | T | T | P |
| 681 | 680 pF | | | Y | | W* | W* | W* | W* | | W | W | T | T | P |
| 721 | 720 pF | | | | | | | | W* | | W | | | T | P |
| 821 | 820 pF | | | | | W* | W* | W* | W* | | W | Y | T | T | P |
| 102 | 1.0 nF | | | | | W* | Y* | Y* | W* | | W | Y | W | T | P |
| 122 | 1.2 nF | | | | | | | Y* | Y* | | | | W | T | |
| 152 | 1.5 nF | | | | | | | Y* | Y* | | | | W | W | |
| 182 | 1.8 nF | | | | | | | Y* | Y* | | | | W | W | |
| 222 | 2.2 nF | | | | | | | Y* | Y* | | | | W | Y | |
| 272 | 2.7 nF | | | | | | | Z* | Y* | | | | | Y | |
| 332 | 3.3 nF | | | | | | | | Y* | | | | | Y | |
| 392 | 3.9 nF | | | | | | | | Y* | | | | | Y | |
| 472 | 4.7 nF | | | | | | | | Y* | | | | | Y | |
| 562 | 5.6 nF | | | | | | | | | | | | | Y | |
| 682 | 6.8 nF | | | | | | | | | | | | | | |
| 822 | 8.2 nF | | | | | | | | | | | | | | |
| 103 | 10 nF | | | | | | | | | | | | | Y | |
| 123 | 12 nF | | | | | | | | | | | | | Y | |
| 153 | 15 nF | | | | | | | | | | | | | Y | |
| 183 | 18 nF | | | | | | | | | | | | | Y | |
| 223 | 22 nF | | | | | | | | | | | | | Z | |
| 273 | 27 nF | | | | | | | | | | | | | Z* | |
| 333 | 33 nF | | | | | | | | | | | | | Z* | |
| 393 | 39 nF | | | | | | | | | | | | | Z* | |
| 473 | 47 nF | | | | | | | | | | | | | Z* | |
| 563 | 56 nF | | | | | | | | | | | | | Z* | |


| Code | Thickness (mm) |
|------|----------------|
| P | 1.25±0.10 |
| R | 1.40±0.15 |
| T | 1.60±0.20 |
| W | 2.00±0.20 |
| Y | 2.50±0.30 |
| Z | 2.80±0.30 |

* : Surface coating only

This document is subject to change without notice.

APPLICATIONS

- RF and microwave communication (30MHz - 30GHz) for satellite communication, base station, wireless devices, radar



RoHS compliant

FEATURES

- Ultra stable dielectric material $Q > 2000$
- Best in class ESR
- High conductivity precious metal electrodes
- Marking option
- Standard and custom kits
- High rel version according to ESCC3009
- High temperature version up to 200°C (H prefix)

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS:
at + 25°C unless otherwise specified

OPERATING TEMPERATURE:
- 55°C. + 125°C

TEMPERATURE COEFFICIENT:
± 30ppm

DISSIPATION FACTOR :
≤ 5.10⁻⁴ at 1Vrms and 1MHz for values ≤ 1000pF
≤ 5.10⁻⁴ at 1Vrms and 1KHz for values > 1000pF

INSULATION RESISTANCE (IR):
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST:
2.5Un U ≤ 200V | U + 250V 200 < U ≤ 500 | 1.5U 500 < U < 1000 | 1.2U U ≥ 1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA


| | 0402 | 0504 | 0505 | 0603 | 0709 | 0805 | 1206 | 1210 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| MIN | 0.1pF | 0.1pF | 0.1pF | 0.1pF | 0.1pF | 0.1pF | 0.5pF | 0.5pF |
| 25V | 82pF | 820pF | 1.0nF | 560pF | 1.5nF | 1.5nF | 4.7nF | 5.6nF |
| 50V | 56pF | 820pF | 1.0nF | 560pF | 1.5nF | 1.5nF | 4.7nF | 5.6nF |
| 100V | 33pF | 820pF | 1.0nF | 560pF | 1.5nF | 1.5nF | 4.7nF | 5.6nF |
| 150V | 33pF | 820pF | 1.0nF | 150pF | 1.5nF | 1.5nF | 4.7nF | 5.6nF |
| 200V | 33pF | 220pF | 270pF | 150pF | 1.5nF | 1.5nF | 4.7nF | 5.6nF |
| 250V | 33pF | 220pF | 270pF | 150pF | 1.5nF | 1.5nF | 4.7nF | 5.6nF |
| 500V | | | | 68pF | 470pF | 470pF | 680pF | 1.2nF |
| 1000V | | | | | | | 150pF | 270pF |

ORDERING INFORMATION

| 1206 | Q | 560 | F | E | X | - | B | - |
|--|------------|--|--|---|--|----------------------------|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | MARKING | PACKAGING | SPECIAL |
| 0402 0504 0505 0603 0709 0805 1206 1210 | Q = High Q | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% | X = 25V A = 50V B = 100V N = 150V C = 200V P = 250V E = 500V G = 1000V | X = Nickel Tin C = Copper Tin (Non magnetic) F = Silver Palladium (Non magnetic) W = Nickel Gold Flash G = Nickel Gold Thick H = Dipped SnPb I = Electrolytic SnPb | - = Unmarked M = Marked | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |


DIMENSIONS IN MILLIMETERS

| | 0402 | 0505 | 0603 | 0709 | 0805 | 1206 | 1210 |
|-------------------|------------|------------|------------|------------|------------|------------|------------|
| LENGTH (L) | 1.00 ± 0.1 | 1.40 ± 0.1 | 1.60 ± 0.1 | 1.80 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 |
| WIDTH (W) | 0.50 ± 0.1 | 1.40 ± 0.1 | 0.80 ± 0.1 | 2.30 ± 0.2 | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 |
| THICKNESS MAX (T) | 0.60 | 1.45 | 0.90 | 2.90 | 1.40 | 1.70 | 1.70 |
| TERMINATION (P) | MIN | 0.10 | 0.10 | 0.25 | 0.25 | 0.25 | 0.25 |
| | MAX | 0.40 | 0.40 | 0.40 | 0.50 | 0.70 | 0.80 |




TYPICAL CHARACTERISTICS


Temperature coefficient of capacitance

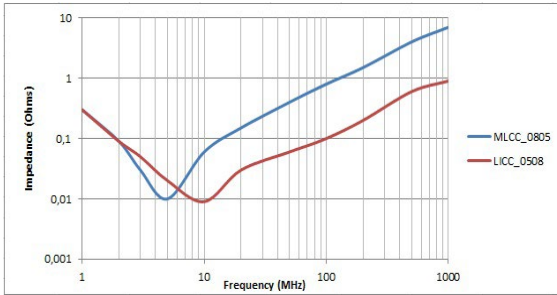


Series resonant frequency

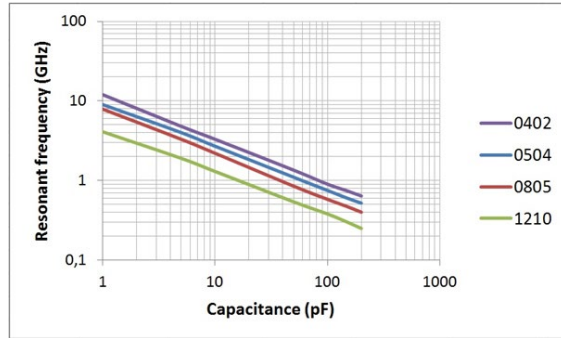


Q / Frequency - 0402, 200V

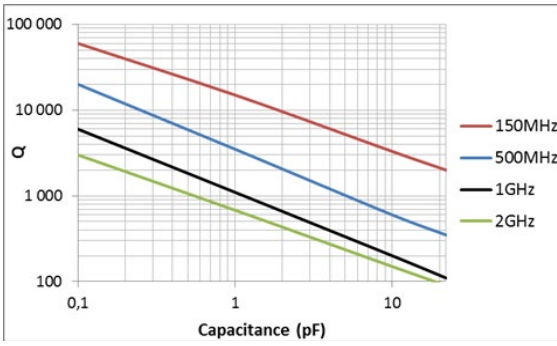


ESR / Frequency - 0402, 200V

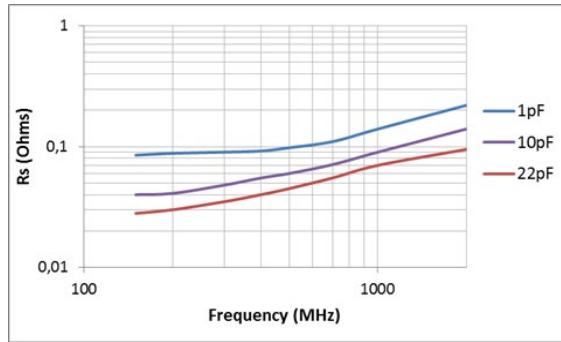

Q / Frequency - 0805, 1206, 200V

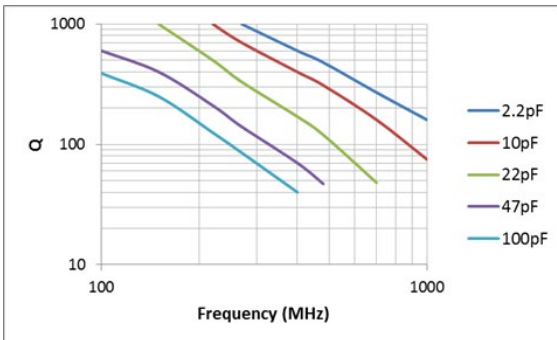


ESR / Frequency - 0805, 1206, 200V

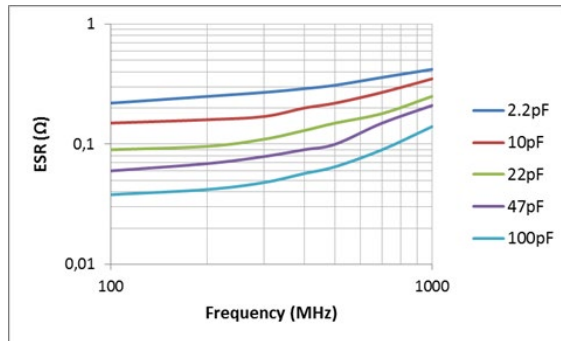

APPLICATIONS

- Lasers, CATV, RF Power Amplifiers
- Mixers, RF Instruments

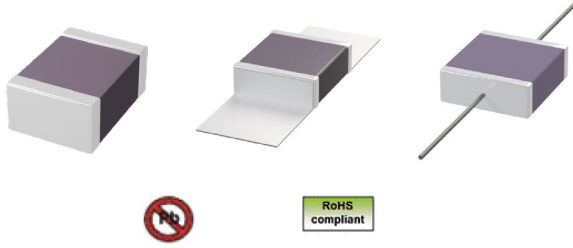

FEATURE

- Wide range of termination magnetic and non magnetic
- Microstrips and wires, axial, radial
- Equivalent to concurrent design
- Very low ESL/ESR. High current
- Optional marking
- High temperature version up to 200°C (H prefix)
- High rel version according to ESCC3009

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS:
at + 25°C unless otherwise specified

OPERATING TEMPERATURE:
- 55°C, + 125°C

TEMPERATURE COEFFICIENT:
± 30ppm

DISSIPATION FACTOR:
≤ 5.10⁻⁴ at 1Vrms at 1Vrms 1MHz for values ≤ 1000pF
≤ 5.10⁻⁴ at 1Vrms at 1Vrms 1KHz for values > 1000pF

INSULATION RESISTANCE (IR):
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST:
2.5Un U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000 for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 1111 | 2225 | 2525 | 4040 | 7274 |
|--------|-------|-------|-------|-------|-------|
| MIN | 0.1pF | 0.5pF | 0.5pF | 0.5pF | 1pF |
| 50V | 10nF | 12nF | 18nF | 20nF | 20nF |
| 150V | 10nF | 12nF | 18nF | 20nF | 20nF |
| 200V | 10nF | 12nF | 18nF | 20nF | 20nF |
| 250V | 1.5nF | 12nF | 18nF | 20nF | 20nF |
| 300V | 1.5nF | 12nF | 18nF | 20nF | 20nF |
| 500V | 1.2nF | 12nF | 18nF | 20nF | 20nF |
| 630V | 68pF | 3.0nF | 4.7nF | 18nF | 20nF |
| 1000V | 33pF | 2.4nF | 3.3nF | 18nF | 20nF |
| 1500V | 15pF | 1.5nF | 1.8nF | 5.1nF | 20nF |
| 2000V | | 220pF | 820pF | 5.1nF | 20nF |
| 2500V | | 330pF | 820pF | 2.2nF | 12nF |
| 3600V | | 150pF | 360pF | 680pF | 10nF |
| 5000V | | | | 390pF | 1nF |
| 7200V | | | | 220pF | 430pF |
| 8000V | | | | 180pF | 360pF |
| 10000V | | | | | 200pF |


ORDERING INFORMATION

| 2325 | Q | 560 | F | E | X | - | B | - |
|--------------------------------------|------------|--|--|---|---|-----------------------------|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | MARKING | PACKAGING | SPECIAL |
| 1111 2225 2525 4040 7274 | Q = High Q | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0,25pF D = ± 0,5pF F = ± 1% G = ± 2% J = ± 5% | A = 50V B = 100V C = 200V P = 250V D = 300V E = 500V F = 630V G = 1000V O = 1500V H = 2000V T = 2500V M = 3600V K = 4000V L = 5000V S = 7200V 8 = 8000V 10 = 10000V | X = Nickel Tin C = Copper Tin (Non magnetic) F = Silver Palladium (Non magnetic) W = Nickel Gold Flash G = Nickel Gold Thick H = Dipped SnPb I = Electrolytic SnPb M = Microstrip A = Axial Ribbon R = Radial Ribbon U = Axial Wire V = Radial Wire CM = Microstrip (Non magnetic) CA = Axial Ribbon (Non magnetic) CR = Axial Ribbon (Non magnetic) CU = Axial Wire (Non magnetic) CV = Radial Wire (Non magnetic) | - = Un-marked M = Marked | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |

This document is subject to change without notice.

DIMENSIONS IN MILLIMETERS


| DESIGNATION | TERMINATION | 1111 | 2225 | 2525 | 4040 | 7274 |
|------------------------|---------------------|------------|------------|------------|------------|------------|
| LENGTH (L) | X, C, F, W, G, H, I | 2.80 ± 0.2 | 5.85 ± 0.4 | 6.35 ± 0.4 | 9.7 ± 0.6 | 18.9 ± 0.8 |
| LENGTH (L) | M, CM, A, AR, R, CR | 3.20 ± 0.5 | 6.30 ± 0.6 | 6.80 ± 0.6 | 10.1 ± 0.8 | 18.9 ± 1.0 |
| LENGTH (L) | U, UC, CU, CV | 3.20 ± 0.5 | 6.30 ± 0.6 | 6.80 ± 0.6 | 10.1 ± 0.8 | |
| WIDTH (W) | ALL | 2.80 ± 0.4 | 6.35 ± 0.5 | 6.35 ± 0.5 | 9.7 ± 0.8 | 19.1 ± 1.0 |
| THICKNESS MAX (T) | ALL - M, CM | 2.60 | 4.30 | 4.30 | 4.30 | 4.30 |
| THICKNESS MAX (T) | M, CM | 3.10 | 4.30 | 4.30 | 4.30 | |
| TERMINATION (P) | MIN | ALL | 0.20 | 0.25 | 0.80 | 0.80 |
| | MAX | ALL | 0.50 | 0.80 | 1.50 | 1.50 |
| LENGTH RIBBON MIN (LR) | M, CM, A, AR, R, CR | 7.00 | 13.00 | 13.00 | 20.00 | 20.00 |
| WIDTH RIBBON (WR) | M, CM, A, AR, R, CR | 2.40 ± 0.2 | 6.10 ± 0.2 | 6.10 ± 0.2 | 8.90 ± 0.2 | 16.7 ± 0.4 |
| THICKNESS RIBBON (TR) | M, CM, A, AR, R, CR | 0.10 | 0.10 | 0.10 | 0.25 | 0.25 |
| LENGTH WIRE MIN (LW) | U, UC, CU, CV | 13.00 | 13.00 | 13.00 | 25.00 | |
| DIAMETER WIRE (DW) | U, UC, CU, CV | 0.41 | 0.81 | 0.81 | 0.81 | |

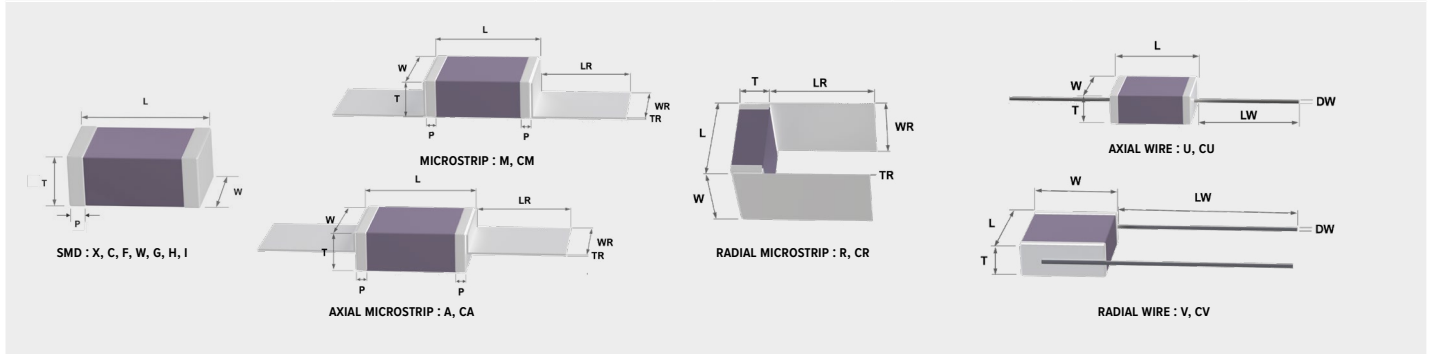

TYPICAL CHARACTERISTICS : 0505 TO 1111


0505

$ESR = f(F_{MHz})$

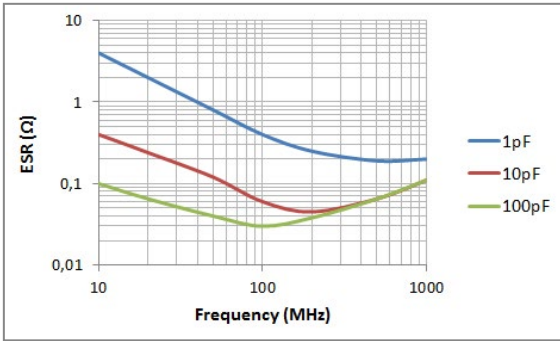


1111


$ESR = f(F_{MHz})$

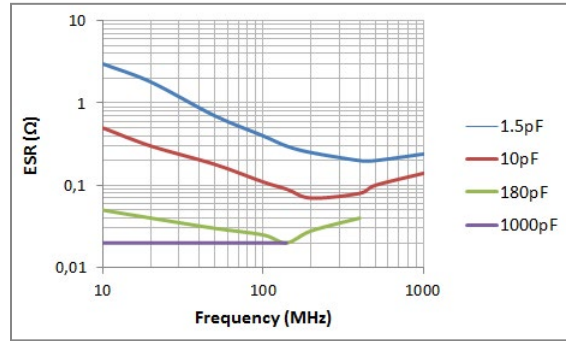


$Q \text{ Value} = f(F_{MHz})$

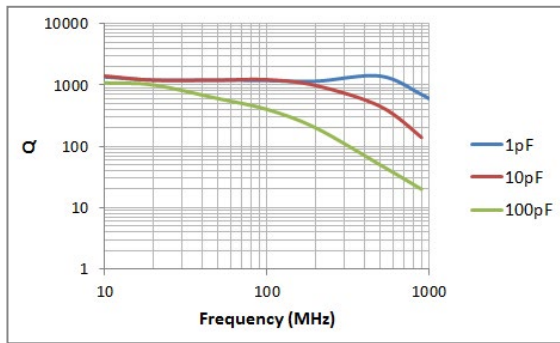


$Q \text{ Value} = f(F_{MHz})$

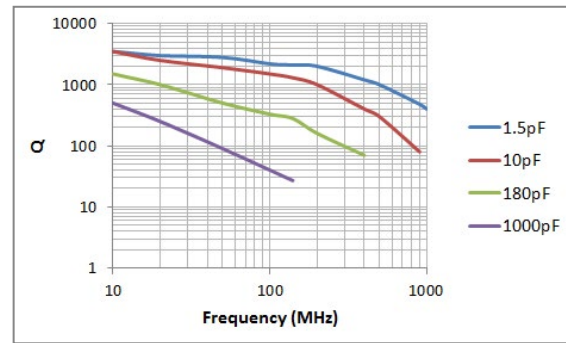


$\text{Resonant Frequency} = f(\text{CAP}_{pF})$

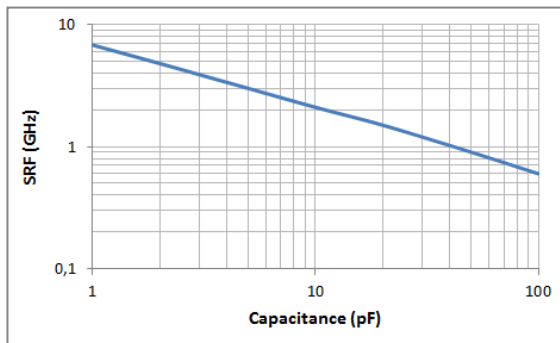


$\text{Resonant Frequency} = f(\text{CAP}_{pF})$

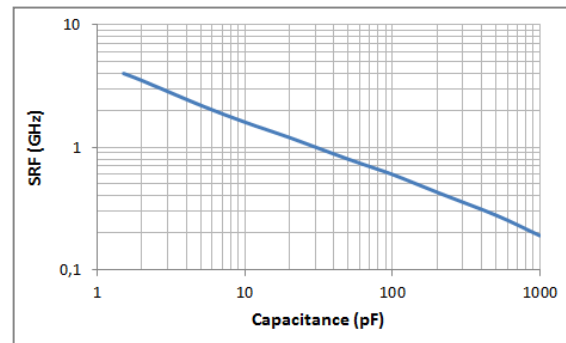

$I_{RMS} = f(\text{CAP}_{pF})$

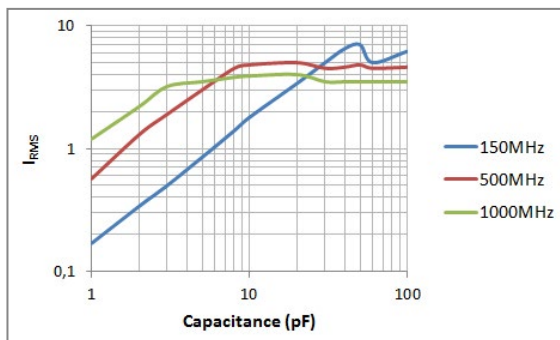

$I_{RMS} = f(\text{CAP}_{pF})$

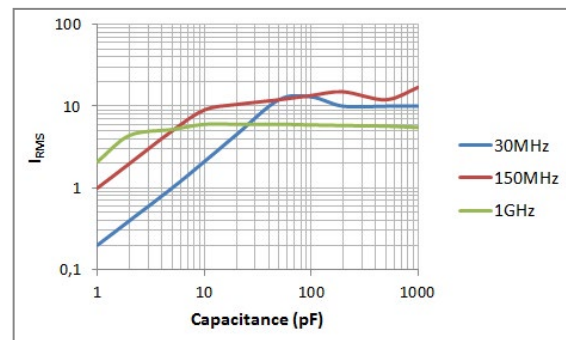


This document is subject to change without notice.

TYPICAL CHARACTERISTICS : 2325 TO 4040



2325

4040


ESR = f(F_{MHz})

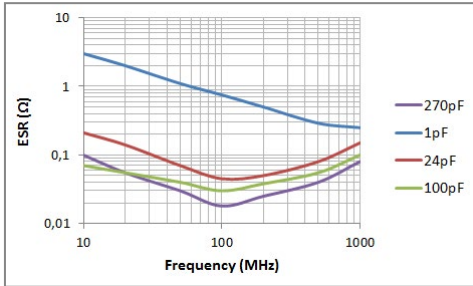



ESR = f(F_{MHz})

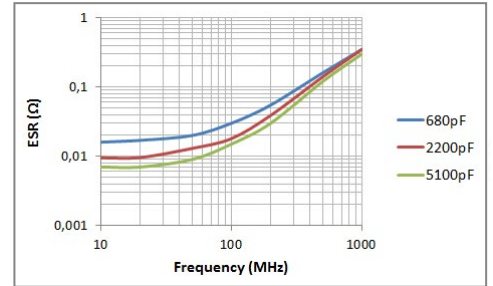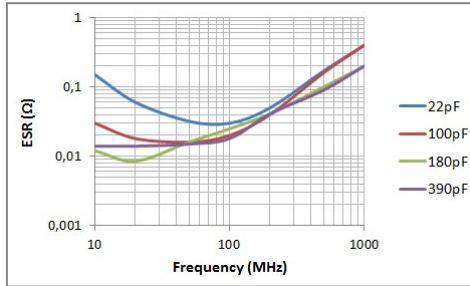


Q Value = f(F_{MHz})

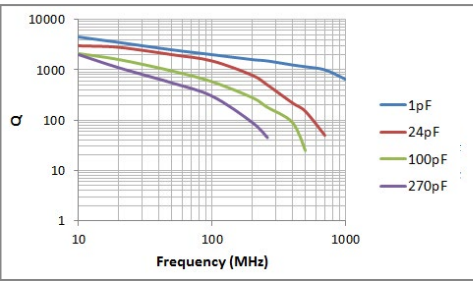


Q Value = f(F_{MHz})

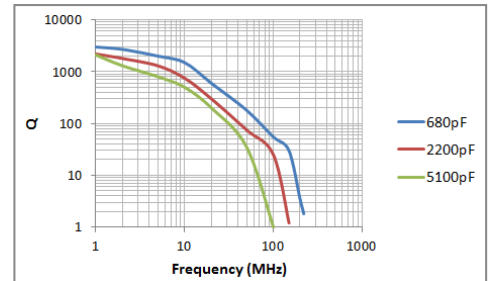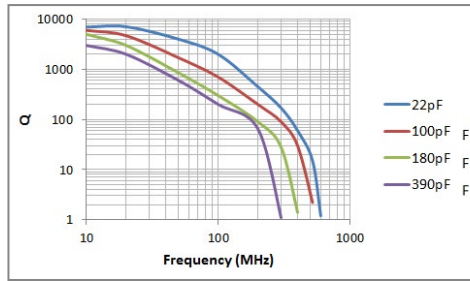


Resonant Frequency = f(CAP_{pF})

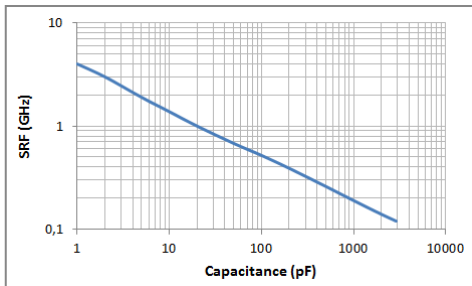


Resonant Frequency = f(CAP_{pF})

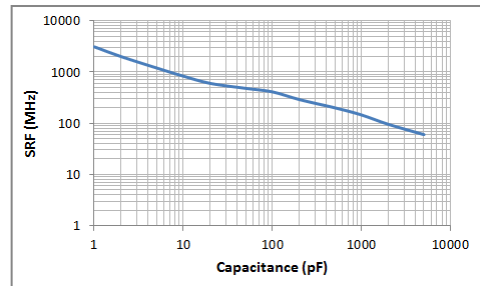

I_{RMS} = f(CAP_{pF})

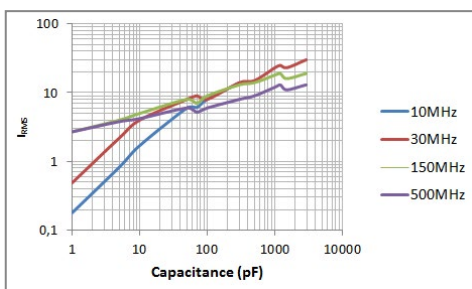

I_{RMS} = f(CAP_{pF})

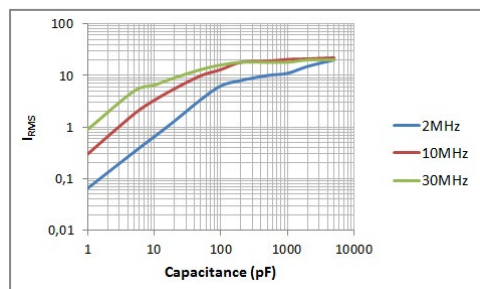

DESIGN KITS

SRT-Microc ermique is widening its High Q offer and propose design Kits with

KITS


| P/N | DES | RANGE | VALUES | TOL |
|-----------------|--|----------------|--|---------------------------------------|
| 0603QXK-0R1-020 | 0603 HIGH Q 250V NISN TERMINATION (15PCS PER VALUE) | 1.0pF -> 2.0pF | 0.1pF 0.2pF 0.3pF 0.4pF 0.5pF 0.6pF 0.7pF 0.8pF 0.9pF 1.0pF 1.1pF 1.2pF 1.5pF 1.6pF, 1.8pF, 2.0pF | ±0.1pF (B) ±0.25pF (C) |
| 0603QXK-010-100 | | 1.0pF -> 10pF | 1.0pF 1.2pF 1.5pF 1.8pF 2.0pF 2.2pF 2.4pF 2.7pF 3.0pF 3.3pF 3.9pF 4.7pF 5.6pF 6.8pF 8.2pF 10pF | ±0.25pF (C) ±0.50pF (D) ±5% (K) |
| 0603QXK-100-101 | | 10pF -> 100pF | 10pF 12pF 15pF 18pF 20pF 22pF 24pF 27pF 30pF 33pF 39pF 47pF 56pF 68pF 82pF 100pF | ±5% (K) |
| 0709QXK-010-100 | 0709 HIGH Q 500V NISN TERMINATION (15PCS PER VALUE) | 1.0pF -> 10pF | 1.0pF 1.2pF 1.5pF 1.8pF 2.0pF 2.2pF 2.4pF 2.7pF 3.0pF 3.3pF 3.9pF 4.7pF 5.6pF 6.8pF 8.2pF 10pF | ±0.25pF (C) ±0.50pF (D) ±5% (K) |
| 0703QXK-100-101 | | 10pF -> 100pF | 10pF 12pF 15pF 18pF 20pF 22pF 24pF 27pF 30pF 33pF 39pF 47pF 56pF 68pF 82pF 100pF | ±5% (K) |

RF DECOUPLING X7R Vertical Electrodes Capacitor

16V-100V

APPLICATIONS

- Filtering, decoupling in Microelectronic applications



FEATURES

- Low Inductance Chip for Decoupling Integrated
- Circuit Able to work until 3GHz
- Wire Bondable Capacitor with Gold Termination
- Attachment Conductive Adhesive or AuSn Solder

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS:
at + 25°C unless otherwise specified

OPERATING TEMPERATURE:
- 55°C, + 125°C

TEMPERATURE COEFFICIENT:
± 15% with 0Vdc applied

DISSIPATION FACTOR:
≤ 2.5%

INSULATION RESISTANCE (IR):
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST:
Performed per method 301 MIL STD 202
Applied test voltages
≤ 100Vdc-rated : 250% of rated voltage

QUICK REFERENCE DATA

| | 0204 | 0303 | 0306 | 0404 | 0508 |
|------|-------|-------|-------|-------|-------|
| Min | 10pF | 10pF | 10pF | 10pF | 100pF |
| 16V | 10nF | 15nF | 33nF | 22nF | 47nF |
| 25V | 5.6nF | 15nF | 33nF | 22nF | 47nF |
| 50V | 2.2nF | 10nF | 22nF | 15nF | 22nF |
| 100V | 1nF | 6.8nF | 8.2nF | 8.2nF | 22nF |


ORDERING INFORMATION

| SREV | 0303 | Y | 103 | K | X | W | W | - |
|-------|--------------------------------------|------------|--|------------------------|---|-------------|-----------------|---|
| STYLE | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL |
| SREV | 0204 0303 0306 0404 0508 | Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | K = ± 10% M = ± 20% | J = 16V X = 25V A = 50V B = 100V | W = Gold | W = Waffle Pack | - Dxx = Reliability spec Exx = Sorting spec |

DIMENSIONS IN MILLIMETERS

| DESIGNATION | 0204 | 0303 | 0306 | 0404 | 0508 |
|---------------|-------------|------------|------------|------------|------------|
| Length (L) | 0.51 ± 0.05 | 0.8 ± 0.05 | 0.8 ± 0.05 | 1.02 ± 0.1 | 1.25 ± 0.1 |
| Width (W) | 1.02 ± 0.1 | 0.8 ± 0.05 | 1.50 ± 0.1 | 1.02 ± 0.1 | 2.1 ± 0.1 |
| THICKNESS (T) | Min | 0.45 | 0.60 | 0.65 | 0.65 |
| | Max | 0.15 | 0.15 | 0.15 | 0.15 |


Gold Termination > 2.5µm.






TYPICAL CHARACTERISTICS


X7R Capacitance and dissipation factor vs temperature

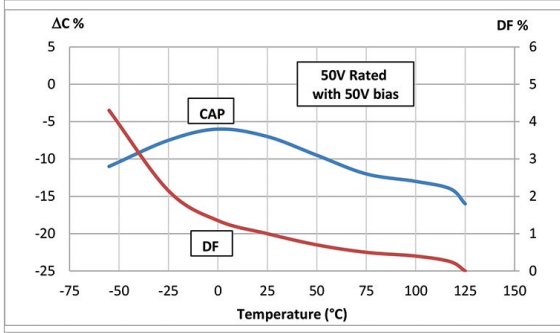


X7R Aging

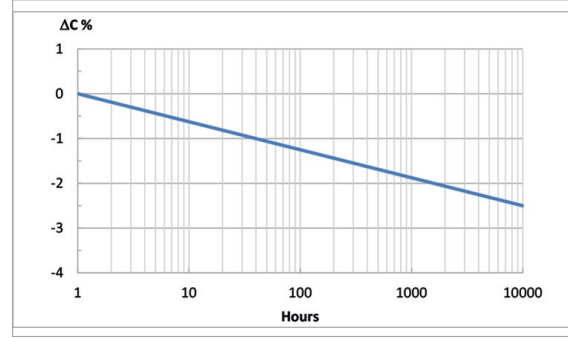


X7R Voltage coefficient of capacitance

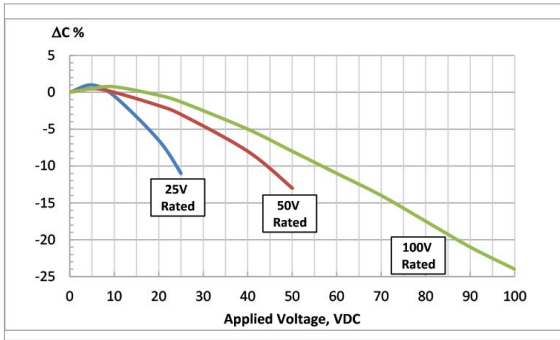


X7R Insulation resistance vs temperature

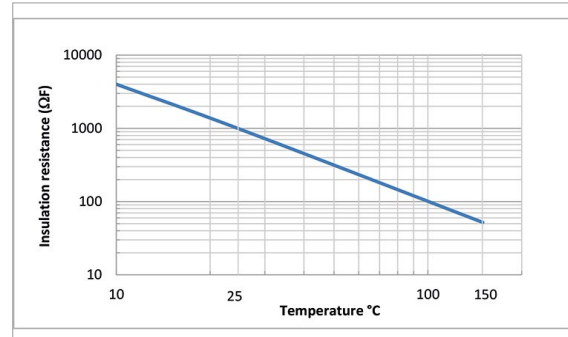

Impedance vs frequency

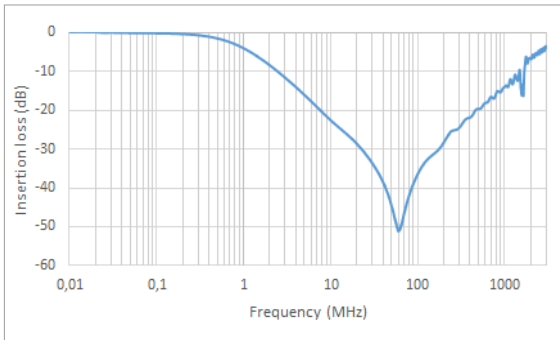


Impedance vs high frequency

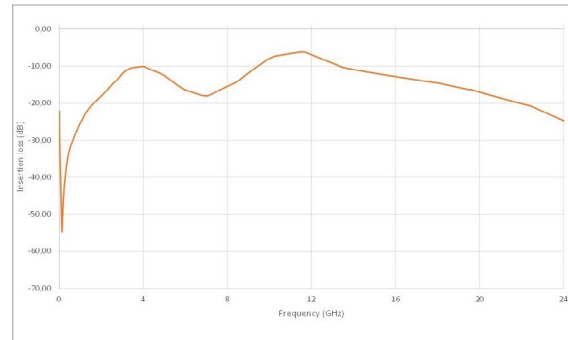



APPLICATIONS

- Microelectronic applications
- Wirebonding/glueing



FEATURES

- Max 0.2µm Flash Au for Glueing (W termination)
- Min 2.5µm Thick Au for Wire Bonding/Glueing (G termination)

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

AGING RATE :
X7R : 2% per decade

Dissipation Factor :
NPO/N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
 ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U ≤ 200V | U + 250V 200 < U ≤ 500 | 1.5U 500 < U < 1000 | 1.2U U ≥ 1000
for 5s with 50mA max charging current

ORDERING INFORMATION

| 0603 | A | 103 | G | B | G | B | - |
|--|-------------------------------|--|--|---|----------------------------------|----------------------|---|
| SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| 0201 0306 0402 0504 0508 0603 0612 0805 1206 1210 1808 1812 1825 2220 2225 | A = NPO P = N2T Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit gives the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0,5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | R = 6.3V Q = 10V J = 16V X = 25V A = 50V U = 63V B = 100V C = 200V P = 250V E = 500V | W = Gold Flash G = Gold Thick | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us.

QUICK REFERENCE DATA

| | 0201 | | 0306 | | | 0402 | | | 0504 | | | 0508 | | | 0603 | | | 0612 | | | 0805 | | |
|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 0.1 pF | 100 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 1.0 pF | 6.8 pF | 0.1 pF | 1.0 pF | 6.8 pF |
| 6.3V | 1.0 nF | 33 nF | 1.2 nF | 5.6 nF | 470 nF | 2.2 nF | 1.2 nF | 1.0 µF | 1.5 nF | 6.8 nF | 39 nF | 3.9 nF | 15 nF | 2.2 µF | 27 nF | 5.6 nF | 4.7 µF | 8.2 nF | 33 nF | 4.7 µF | 47 nF | 15 nF | 10 µF |
| 10V | 1.0 nF | 33 nF | 1.2 nF | 5.6 nF | 470 nF | 2.2 nF | 1.2 nF | 470 nF | 1.5 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 2.2 µF | 27 nF | 5.6 nF | 4.7 µF | 8.2 nF | 33 nF | 2.2 µF | 47 nF | 15 nF | 10 µF |
| 16V | 1.0 nF | 33 nF | 1.2 nF | 5.6 nF | 470 nF | 2.2 nF | 1.2 nF | 220 nF | 1.5 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 2.2 µF | 27 nF | 5.6 nF | 2.2 µF | 8.2 nF | 33 nF | 1.0 µF | 47 nF | 15 nF | 10 µF |
| 25V | 1.0 nF | 10 nF | 1.2 nF | 5.6 nF | 33 nF | 2.2 nF | 1.2 nF | 220 nF | 1.5 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 2.2 µF | 27 nF | 5.6 nF | 1.0 µF | 8.2 nF | 33 nF | 470 nF | 47 nF | 15 nF | 4.7 µF |
| 50V | 220 pF | 1.5 nF | 1.2 nF | 4.7 nF | 33 nF | 1.5 nF | 1.2 nF | 100 nF | 1.5 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 10 nF | 5.6 nF | 1.0 µF | 8.2 nF | 33 nF | 220 nF | 47 nF | 15 nF | 4.7 µF |
| 63V | 100 pF | | 1.2 nF | 4.7 nF | 33 nF | 1.0 nF | 1.2 nF | 12 nF | 1.5 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 10 nF | 5.6 nF | 100 nF | 8.2 nF | 33 nF | 220 nF | 33 nF | 15 nF | 1.0 µF |
| 100V | 100 pF | | 1.2 nF | 4.7 nF | 33 nF | 1.0 nF | 1.2 nF | 10 nF | 1.5 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 10 nF | 5.6 nF | 100 nF | 8.2 nF | 33 nF | 220 nF | 33 nF | 15 nF | 1.0 µF |
| 200V | | | 1.2 nF | 4.7 nF | 33 nF | 330 pF | 1.0 nF | 6.8 nF | 1.2 nF | 5.6 nF | 39 nF | 3.9 nF | 15 nF | 100 nF | 2.2 nF | 5.6 nF | 39 nF | 8.2 nF | 33 nF | 220 nF | 10 nF | 15 nF | 470 nF |
| 250V | | | 1.2 nF | 4.7 nF | 27 nF | 330 pF | 1.0 nF | 5.6 nF | 1.2 nF | 5.6 nF | 33 nF | 3.9 nF | 15 nF | 82 nF | 2.2 nF | 5.6 nF | 27 nF | 8.2 nF | 33 nF | 180 nF | 10 nF | 15 nF | 82 nF |
| 500V | | | 820 pF | 2.2 nF | 5.6 nF | 180 pF | 470 pF | 1.2 nF | 1.0 nF | 2.7 nF | 6.8 nF | 3.3 nF | 10 nF | 39 nF | 1.0 nF | 2.7 nF | 6.8 nF | 8.2 nF | 22 nF | 82 nF | 3.3 nF | 10 nF | 33 nF |

Max values italic obtained with BME parts




QUICK REFERENCE DATA

| | 1206 | | | 1210 | | | 1808 | | | 1812 | | | 1825 | | | 2220 | | | 2225 | | |
|-------------|---------------|--------|---------------|---------------|--------|---------------|--------|--------|--------|--------|--------|---------------|---------------|--------|---------------|--------|--------|---------------|--------|--------|---------------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 0.4 pF | 4.7 pF | 10 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 10 pF | 33 pF |
| 6.3V | <i>220 nF</i> | 39 nF | <i>22 μF</i> | <i>220 nF</i> | 68 nF | <i>47 μF</i> | 22 nF | 82 nF | 470 nF | 220 nF | 120 nF | <i>22 μF</i> | <i>100 nF</i> | 270 nF | <i>10 μF</i> | 470 nF | 330 nF | <i>47 μF</i> | 100 nF | 390 nF | <i>10 μF</i> |
| 10V | <i>220 nF</i> | 39 nF | <i>22 μF</i> | <i>220 nF</i> | 68 nF | <i>47 μF</i> | 22 nF | 82 nF | 470 nF | 220 nF | 120 nF | <i>22 μF</i> | <i>100 nF</i> | 270 nF | <i>10 μF</i> | 470 nF | 330 nF | <i>47 μF</i> | 100 nF | 390 nF | <i>10 μF</i> |
| 16V | <i>220 nF</i> | 39 nF | <i>22 μF</i> | <i>220 nF</i> | 68 nF | <i>22 μF</i> | 22 nF | 82 nF | 470 nF | 220 nF | 120 nF | <i>22 μF</i> | <i>100 nF</i> | 270 nF | <i>10 μF</i> | 470 nF | 330 nF | <i>47 μF</i> | 100 nF | 390 nF | <i>10 μF</i> |
| 25V | <i>220 nF</i> | 39 nF | <i>10 μF</i> | <i>220 nF</i> | 68 nF | <i>22 μF</i> | 22 nF | 82 nF | 470 nF | 220 nF | 120 nF | <i>22 μF</i> | <i>100 nF</i> | 270 nF | <i>10 μF</i> | 470 nF | 330 nF | <i>47 μF</i> | 100 nF | 390 nF | <i>10 μF</i> |
| 50V | <i>220 nF</i> | 39 nF | <i>10 μF</i> | <i>150 nF</i> | 68 nF | <i>22 μF</i> | 22 nF | 82 nF | 470 nF | 220 nF | 120 nF | <i>6.8 μF</i> | <i>100 nF</i> | 270 nF | <i>10 μF</i> | 470 nF | 330 nF | <i>47 μF</i> | 100 nF | 390 nF | <i>10 μF</i> |
| 63V | <i>100 nF</i> | 39 nF | <i>2.2 μF</i> | <i>100 nF</i> | 68 nF | <i>10 μF</i> | 22 nF | 82 nF | 470 nF | 150 nF | 120 nF | <i>4.7 μF</i> | <i>100 nF</i> | 270 nF | <i>10 μF</i> | 330 nF | 330 nF | <i>22 μF</i> | 100 nF | 390 nF | <i>10 μF</i> |
| 100V | <i>100 nF</i> | 39 nF | <i>2.2 μF</i> | <i>100 nF</i> | 68 nF | <i>10 μF</i> | 22 nF | 82 nF | 470 nF | 150 nF | 120 nF | <i>4.7 μF</i> | <i>100 nF</i> | 270 nF | <i>10 μF</i> | 330 nF | 330 nF | <i>22 μF</i> | 100 nF | 390 nF | <i>10 μF</i> |
| 200V | <i>22 nF</i> | 39 nF | <i>220 nF</i> | <i>47 nF</i> | 68 nF | <i>1.0 μF</i> | 22 nF | 82 nF | 470 nF | 100 nF | 120 nF | <i>1.0 μF</i> | 82 nF | 270 nF | <i>2.2 μF</i> | 150 nF | 330 nF | <i>2.2 μF</i> | 100 nF | 390 nF | <i>2.7 μF</i> |
| 250V | <i>22 nF</i> | 39 nF | <i>220 nF</i> | <i>47 nF</i> | 68 nF | <i>680 nF</i> | 22 nF | 82 nF | 470 nF | 100 nF | 120 nF | <i>1.0 μF</i> | 82 nF | 270 nF | 1.8 μF | 150 nF | 330 nF | <i>2.2 μF</i> | 100 nF | 390 nF | <i>2.7 μF</i> |
| 500V | 8.2 nF | 27 nF | 82 nF | 15 nF | 47 nF | 180 nF | 18 nF | 56 nF | 220 nF | 33 nF | 100 nF | <i>470 nF</i> | 68 nF | 220 nF | 820 nF | 68 nF | 220 nF | <i>1.0 μF</i> | 82 nF | 270 nF | 1.0 μF |

Max values italic obtained with BME parts

DIMENSIONS IN MILLIMETERS

| | 0201 | 0306 | 0402 | 0504 | 0508 | 0603 | 0612 | 0805 | 1206 | 1210 | 1808 | 1812 | 1825 | 2220 | 2225 |
|------------------|-------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Length (L) | 0.60 ± 0.03 | 0.80 ± 0.1 | 1.00 ± 0.1 | 1.25 ± 0.1 | 1.30 ± 0.2 | 1.60 ± 0.2 | 1.60 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 3.20 ± 0.2 | 4.50 ± 0.2 | 4.50 ± 0.2 | 4.50 ± 0.3 | 5.60 ± 0.4 | 5.60 ± 0.4 |
| Width (W) | 0.30 ± 0.03 | 1.60 ± 0.1 | 0.50 ± 0.1 | 1.00 ± 0.1 | 2.00 ± 0.2 | 0.80 ± 0.2 | 3.20 ± 0.2 | 1.25 ± 0.2 | 1.60 ± 0.2 | 2.50 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 6.35 ± 0.3 | 5.10 ± 0.4 | 6.35 ± 0.4 |
| Thickness max(T) | 0.35 | 0.92 | 0.60 | 1.00 | 2.00 | 0.92 | 3.00 | 1.40 | 1.70 | 2.50 | 2.10 | 3.30 | 3.60 | 4.10 | 4.10 |
| Termination (P) | Min | 0.10 | 0.10 | 0.10 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 |
| | Max | 0.20 | 0.30 | 0.30 | 0.30 | 0.40 | 0.40 | 0.70 | 0.70 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 1.00 |







APPLICATIONS

Our FeedThru Capacitors provide better EMI performance than SMD components due to lower inductance, which results in broader frequency response for :

- Low speed signal lines
- Medium current power lines
- RF Immunity filter and amplifier gain filter



EQUIVALENT CIRCUIT

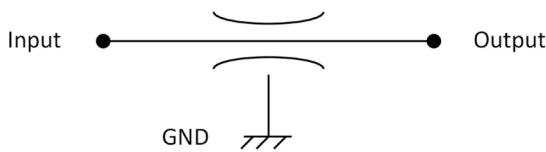

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NP0 : ± 30ppm
X7R : ± 15% with 0Vdc applied

AGING RATE :
X7R : 2% per decade

Dissipation Factor :
NP0 : $\leq 1.10^{-3}$ at 1Vrms and 1MHz for values $\leq 1000\text{pF}$
 $\leq 1.10^{-3}$ at 1Vrms and 1KHz for values $> 1000\text{pF}$
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10^5 MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10^4 MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U \leq 200V | U+250V 200<U \leq 500 | 1.5U 500<U<1000 | 1.2U U \geq 1000
for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0603 | | 0805 | | 1206 | | 1806 | | 1812 | | 2220 | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | NP0 | X7R | NP0 | X7R | NP0 | X7R | NP0 | X7R | NP0 | X7R | NP0 | X7R |
| MIN | 1pF | 47pF | 10pF | 100pF | 22pF | 220pF | 22pF | 220pF | 100pF | 1nF | 100pF | 1nF |
| 50V | 270pF | 6.8nF | 1.5nF | 47nF | 3.3nF | 150nF | 5.6nF | 220nF | 18nF | 680nF | 33nF | 1.5µF |
| 100V | 270pF | 5.6nF | 1.5nF | 47nF | 3.3nF | 100nF | 4.7nF | 150nF | 15nF | 470nF | 33nF | 1µF |
| 200V | 220pF | 2.7nF | 1nF | 22nF | 2.7nF | 56nF | 3.9nF | 68nF | 12nF | 270nF | 27nF | 620nF |
| 500V | 47pF | 750pF | 390pF | 3.9nF | 1nF | 10nF | 1.5nF | 18nF | 6.8nF | 100nF | 15nF | 270nF |
| 1000V | | | 120pF | 1.8nF | 390pF | 5.6nF | 560pF | 6.8nF | 3.3nF | 47nF | 10nF | 150nF |

| CURRENT | NPO | ORDERING | 0603 | 0805 | 1206 | 1806 | 1812 | 2220 |
|---------|-----|----------|-------|-------|-------|-------|------|------|
| | | - | 1A | 2A | 2A | 2A | 3A | 6A |
| | | 1 | 500mA | 500mA | 500mA | 500mA | 3A | 6A |
| | X7R | 2 | 1A | 2A | 2A | / | / | |


ORDERING INFORMATION

| SERIES | 0805 | Y | 103 | K | A | X | - | B | - |
|--------|--|--------------------|--|------------------------------------|--|---|-------------|----------------------|--|
| SIZE | DIELEC-TRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | CURRENT | PACKAGING | SPECIAL PARAMETERS | |
| MCF | 0603 0805 1206 1806 1812 2220 | A = NP0 Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | A = 50V B = 100V C = 200V E = 500V G = 1000V | X = Nickel Tin F = Palladium-Silver P = Polymer Tin (Flex) C = Copper Tin (Non magnetic) I = Plated SnPb W = Nickel Gold | - 1 2 | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec T21 = Special B1 parameters |

For other sizes contact us



DIMENSIONS (In millimeters)

| | 0603 | 0805 | 1206 | 1806 | 1812 | 2220 |
|---------------|------------|------------|------------|------------|------------|------------|
| Length (L) | 1.60 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 4.50 ± 0.3 | 4.50 ± 0.3 | 5.70 ± 0.4 |
| Width (W) | 0.80 ± 0.1 | 1.25 ± 0.2 | 1.60 ± 0.2 | 1.60 ± 0.3 | 3.20 ± 0.2 | 5.00 ± 0.4 |
| Thickness (T) | Max 0.9 | 1.25 | 1.60 | 1.60 | 3.20 | 4.00 |
| Termination | B1 Min | 0.30 | 0.50 | 0.40 | 0.70 | 1.10 |
| | B1 Max | 0.60 | 0.80 | 0.8 | 1.10 | 1.50 |
| | B2 Min | 0.15 | 0.15 | 0.15 | 0.15 | 0.15 |
| | B2 Max | 0.30 | 0.60 | 0.60 | 0.70 | 0.70 |




For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W) of the chip.

TYPICAL CHARACTERISTICS

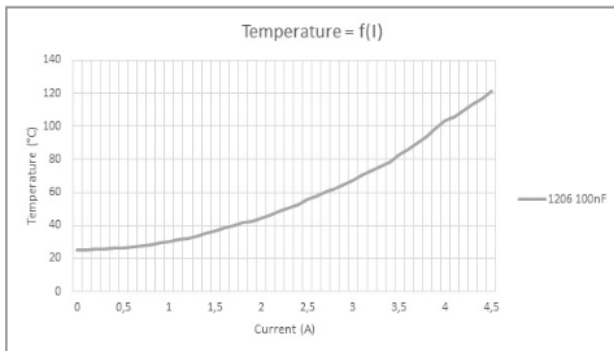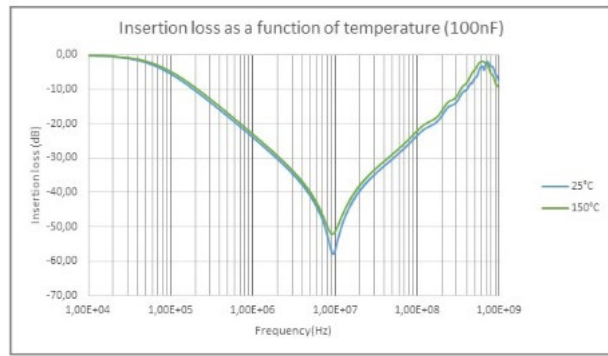


TYPICAL FILTER FOOTPRINT REFLOW SOLDERING

| SIZE | FOOTPRINT DIMENSIONS IN mm | | | | | | | |
|------|----------------------------|------|------|------|------|------|------|------|
| | A | B | C | D | G | H | I | J |
| 0603 | 2.30 | 1.00 | 0.55 | 1.20 | 0.60 | 0.30 | 1.40 | 0.60 |
| 0805 | 2.90 | 1.45 | 0.70 | 1.50 | 0.80 | 0.35 | 1.85 | 1.05 |
| 1206 | 4.10 | 1.80 | 0.95 | 2.20 | 1.00 | 0.60 | 2.20 | 1.40 |
| 1806 | 5.50 | 1.80 | 1.15 | 3.20 | 1.50 | 0.85 | 2.20 | 1.40 |
| 1812 | 5.50 | 3.40 | 1.15 | 3.20 | 1.50 | 0.85 | 3.90 | 3.00 |
| 2220 | 6.80 | 5.40 | 1.25 | 4.30 | 2.00 | 1.15 | 7.20 | 5.00 |

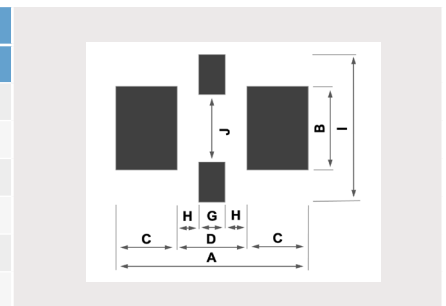


APPLICATIONS

- Flexible Quadripole Capacitor for filtering and decoupling




EQUIVALENT CIRCUIT

- Filtering



- Decoupling



ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
X7R : ± 15% with 0Vdc applied

AGING RATE :
X7R : 2% per decade

Dissipation Factor :
NPO : $\leq 1.10^{-3}$ at 1Vrms and 1MHz for values $\leq 1000\text{pF}$
 $\leq 1.10^{-3}$ at 1Vrms and 1KHz for values $> 1000\text{pF}$
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10^5 MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10^4 MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
 $2.5U_n U \leq 200V \mid U + 250V \ 200 < U \leq 500$ for 5s with 50mA max charging current

QUICK REFERENCE DATA

| | 0603 | | 0805 | | 1206 | | 1812 | | 2220 | |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | NPO | X7R | NPO | X7R | NPO | X7R | NPO | X7R | NPO | X7R |
| MIN | 1pF | 47pF | 1pF | 100pF | 10pF | 220pF | 100pF | 470pF | 100pF | 470pF |
| 50V | 120pF | 8.2nF | 1.2nF | 47nF | 2.2nF | 220nF | 10nF | 470nF | 22nF | 1µF |
| 100V | 120pF | 6.2nF | 1nF | 39nF | 1.8nF | 100nF | 6.8nF | 330nF | 18nF | 750nF |
| 200V | 100pF | 3.3nF | 1nF | 27nF | 1.5nF | 47nF | 6.8nF | 220nF | 18nF | 560nF |
| 500V | 27pF | 680pF | 220pF | 7.5nF | 470pF | 12nF | 3.3nF | 100nF | 10nF | 270nF |


ORDERING INFORMATION

| M2F | 0805 | Y | 103 | K | A | X | B | |
|--------|--|--------------------|---|------------------------------------|---|---|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL PARAMETERS |
| M2F | 0603 0805 1206 1806 1812 2220 | A = NPO Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | J = ± 5% K = ± 10% M = ± 20% | A = 50V B = 100V C = 200V E = 500V | X = Nickel Tin F = Palladium-Silver P = Polymer Tin (Flex) C = Copper Tin (Non magnetic) I = Plated SnPb W = Nickel Gold | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes contact us

DIMENSIONS (In millimeters)


| | 0603 | 0805 | 1206 | 1812 | 2220 | |
|---------------|------------|------------|------------|------------|------------|------|
| Length (L) | 1.60 ± 0.2 | 2.00 ± 0.2 | 3.20 ± 0.2 | 4.50 ± 0.3 | 5.70 ± 0.4 | |
| Width (W) | 0.80 ± 0.1 | 1.25 ± 0.2 | 1.60 ± 0.2 | 3.20 ± 0.2 | 5.00 ± 0.4 | |
| Thickness (T) | Max 0.9 | 1.25 | 1.60 | 3.20 | 4.00 | |
| Termination | B1 Min | 0.30 | 0.50 | 0.70 | 1.10 | |
| | B1 Max | 0.60 | 0.80 | 1.10 | 1.50 | |
| | B2 Min | 0.15 | 0.15 | 0.15 | 0.15 | 0.15 |
| | B2 Max | 0.30 | 0.60 | 0.60 | 0.70 | 0.70 |




For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W) of the chip.

TYPICAL CHARACTERISTICS

Filtering

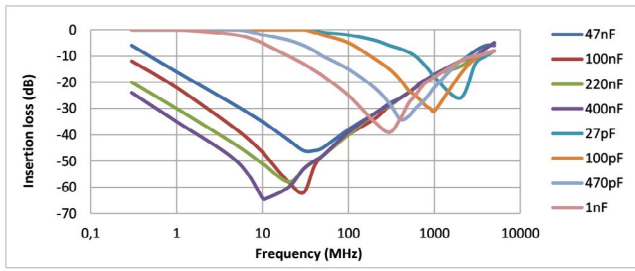


Decoupling

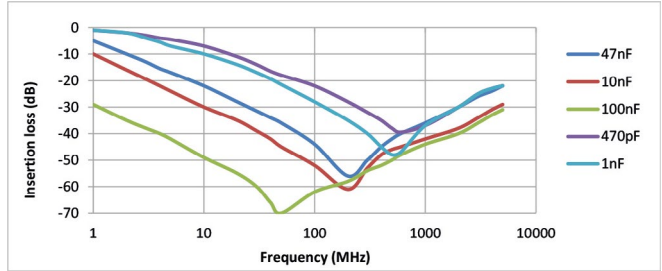

TYPICAL FILTER FOOTPRINT REFLOW SOLDERING


| SIZE | FOOTPRINT DIMENSIONS IN mm | | | | | | | |
|------|----------------------------|------|------|------|------|------|------|------|
| | A | B | C | D | G | H | I | J |
| 0603 | 2.30 | 1.00 | 0.55 | 1.20 | 0.60 | 0.30 | 1.40 | 0.60 |
| 0805 | 2.90 | 1.45 | 0.70 | 1.50 | 0.80 | 0.35 | 1.85 | 1.05 |
| 1206 | 4.10 | 1.80 | 0.95 | 2.20 | 1.00 | 0.60 | 2.20 | 1.40 |
| 1806 | 5.50 | 1.80 | 1.15 | 3.20 | 1.50 | 0.85 | 2.20 | 1.40 |
| 1812 | 5.50 | 3.40 | 1.15 | 3.20 | 1.50 | 0.85 | 3.90 | 3.00 |
| 2220 | 6.80 | 5.40 | 1.25 | 4.30 | 2.00 | 1.15 | 7.20 | 5.00 |






APPLICATIONS

Noise suppression in power lines for High Current Applications



EQUIVALENT CIRCUIT

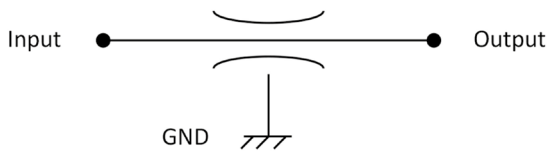

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
X7R : ± 15% with 0Vdc applied

AGING RATE :
X7R : 2% per decade

Dissipation Factor :
NPO : $\leq 1.10^{-3}$ at 1Vrms and 1MHz for values $\leq 1000\text{pF}$
 $\leq 1.10^{-3}$ at 1Vrms and 1KHz for values $> 1000\text{pF}$
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10^5 MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10^4 MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
 $2.5U_n U \leq 200V \mid U + 250V \ 200 < U \leq 500$ for 5s with 50mA max charging current

QUICK REFERENCE DATA (Max capacitance)

| | 1812 | | 2220 | |
|--------------------|-------|--------|-------|---------|
| | NPO | X7R | NPO | X7R |
| MAX CURRENT | 10A | 2A-10A | 20A | 10A-20A |
| MIN | 100pF | 1nF | 100pF | 1nF |
| 50V | 10nF | 220nF | 22nF | 470nF |
| 100V | 10nF | 150nF | 22nF | 330 nF |
| 200V | 10nF | 68nF | 22nF | 150nF |
| 500V | 5.6nF | 47nF | 10nF | 68nF |


ORDERING INFORMATION

| MPF | 0805 | Y | 103 | K | A | X | B | SPECIAL PARAMETERS |
|--------|--------------|--------------------|---|------------------------|---|---|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | |
| MPF | 1812 2220 | A = NPO Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | K = ± 10% M = ± 20% | A = 50V B = 100V C = 200V E = 500V | X = Nickel Tin F = Palladium-Silver P = Polymer Tin (Flex) C = Copper Tin (Non magnetic) I = Plated SnPb W = Nickel Gold | B = Reel V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes contact us



DIMENSIONS (In millimeters)

| | | 1812 | 2220 |
|---------------|--------|------------|------------|
| Length (L) | | 4.50 ± 0.3 | 5.70 ± 0.4 |
| Width (W) | | 3.20 ± 0.2 | 5.00 ± 0.4 |
| Thickness (T) | MAX | 3.20 | 4.00 |
| Termination | B1 Min | 1.10 | 1.10 |
| | B1 Max | 1.50 | 1.50 |
| | B2 Min | 0.15 | 0.15 |
| | B2 Max | 0.70 | 0.70 |




For P termination (Polymer type) add 0.10mm to Length (L) and 0.05 to Width (W) of the chip.

TYPICAL CHARACTERISTICS

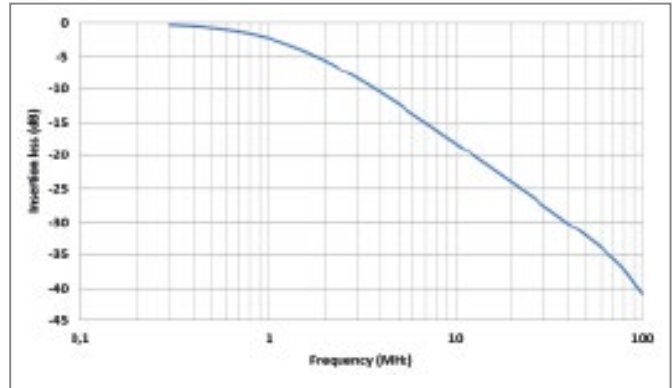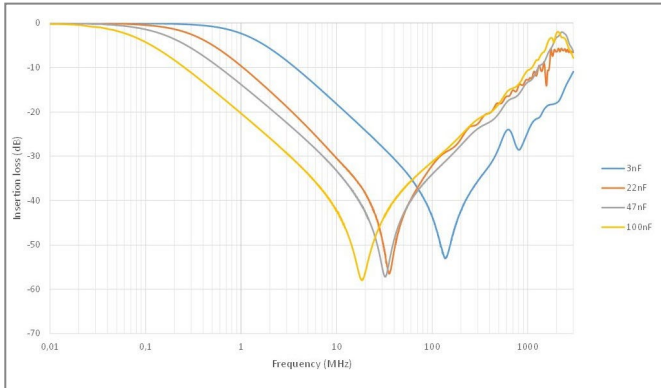

TYPICAL FILTER FOOTPRINT REFLOW SOLDERING

| SIZE | FOOTPRINT DIMENSIONS IN mm | | | | | | | |
|-------------|----------------------------|------|------|------|------|------|------|------|
| | A | B | C | D | G | H | I | J |
| 1812 | 5.50 | 3.40 | 1.15 | 3.20 | 1.50 | 0.85 | 3.90 | 3.00 |
| 2220 | 6.80 | 5.40 | 1.25 | 4.30 | 2.00 | 1.15 | 7.20 | 5.00 |

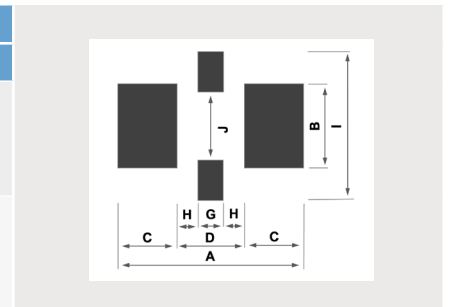

STACKED CAPACITOR High Power


NPO N2T X7R 16-1000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Switch Mode Power Capacitor
- for Input / Output Filtering

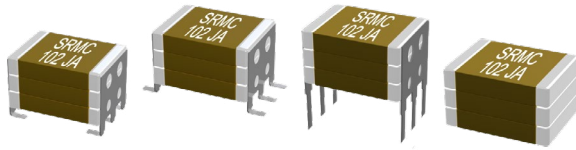

RoHS compliant

FEATURES

- High reliability, 100% 48 hours burn-in
- Low ESR and ESL design
- High frequency switch
- Custom designs with any size, voltage, capacity, leads...
- Marking

ORDERING INFORMATION


| SRMC | 2225 | Y | 102 | J | A | - | L | 100 | - | B | - |
|-------|--|---|--|--|---|-----------------------------------|---------------------------------|---|---|----------------------|---|
| SERIE | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | LEAD FRAME | FORM | HEIGHT (H) | COATING | PACKAGING | SPECIAL |
| SRMC | 1210 1812 1825 2220 2225 2825 3033 3640 4040 40100 5550 6080 6560 6660 8060 80150 | A = NPO P = N2T X = BX Y = X7R BY = 2C1 | Expressed in picofarads (pF) The first two digits are significant, the third digit gives the number of noughts Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | J = 16 V X = 25 V A = 50 V U = 63 V B = 100 V C = 200 V P = 250 V E = 500 V F = 630 V G = 1 KV | - = Tin Plated N = SnPb Plated | J L D M U = 4 leads | 020 030 040 050 060 070 080 090 100 110 120 130 140 160 180 | - I = Conformal Coating H = Epoxy Coating | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For J, L, M form, total height (T) is obtained by adding lead height (C/E) to specified chip height (H) in 1/10mm

For other sizes, voltage, tolerance contact us

DIMENSIONS J/L/D/M (In millimeters)


| | 1210 | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 40100 | 5550 | 6080 | 6560 6660 | 8060 | 80150 |
|-----------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|
| Lenght (L) | 3.80 ± 0.3 | 5.10 ± 0.4 | 5.10 ± 0.4 | 6.20 ± 0.4 | 6.20 ± 0.4 | 7.70 ± 0.4 | 8.20 ± 0.4 | 9.75 ± 0.5 | 10.80 ± 0.8 | 10.80 ± 1.0 | 14.60 ± 1.0 | 15.80 ± 1.0 | 17.40 ± 1.0 | 20.90 ± 1.0 | 20.90 ± 1.0 |
| Width (W) | 2.50 ± 0.3 | 3.20 ± 0.4 | 6.35 ± 0.4 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 8.40 ± 0.4 | 10.20 ± 0.5 | 10.20 ± 0.8 | 25.40 ± 1.0 | 12.70 ± 1.0 | 20.30 ± 1.0 | 15.20 ± 1.0 | 15.20 ± 1.0 | 38.10 ± 1.0 |
| Nb of Leads | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 10 | 5 | 8 | 6 | 6 | 15 |
| Min Height (T) | 2.8 | 2.8 | 3.0 | 3.0 | 3.1 | 3.4 | 3.5 | 3.6 | 4.0 | 4.0 | 4.3 | 4.4 | 4.5 | 4.5 | 4.5 |
| Max Height (T) | 7.2 | 9.6 | 16.2 | 16.2 | 16.2 | 16.9 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 |
| Lead Height (C) | 1.3 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 |
| lead Lenght (D) | 1.3 ± 0.3 | 1.4 ± 0.3 | 1.6 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 |
| Lead Height (E) | 1.0 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 |
| Lead Lenght (F) | 4.0 ± 1.0 | 4.0 ± 1.0 | 4.5 ± 1.0 | 5.0 ± 1.0 | 5.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 |

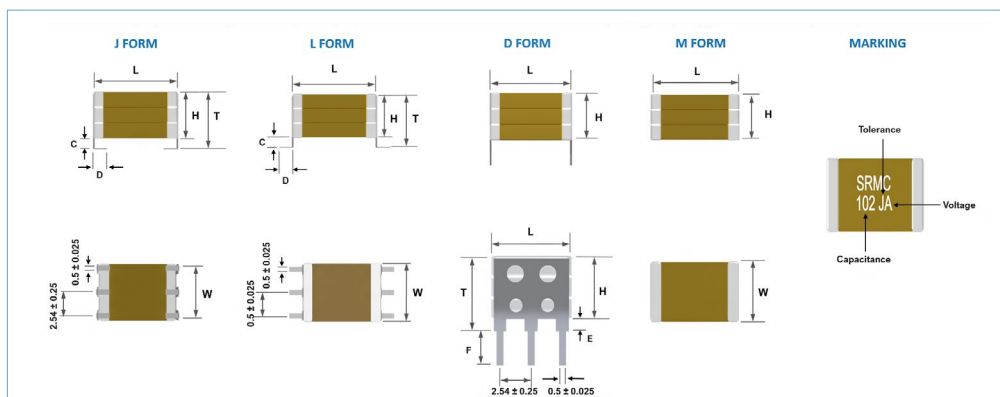

This document is subject to change without notice.

DIMENSIONS 4 WIRES (In millimeters)

| | 3033 | 3640 | 5550 | 5550 | 5550 | 6080 | 6080 | 6660 | 8060 | 40100 | 80150 |
|-----------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Lenght (L) | 9.20 ± 0.5 | 11.15 ± 0.5 | 16.00 ± 0.5 | 16.00 ± 0.5 | 16.00 ± 0.5 | 17.20 ± 0.5 | 17.20 ± 0.5 | 18.80 ± 0.5 | 22.30 ± 0.5 | 12.20 ± 0.5 | 22.70 ± 0.5 |
| Width (W) | 8.40 ± 0.5 | 10.20 ± 0.5 | 12.70 ± 0.5 | 12.70 ± 0.5 | 12.70 ± 0.5 | 20.30 ± 0.5 | 20.30 ± 0.5 | 15.20 ± 0.5 | 15.20 ± 0.5 | 25.40 ± 0.5 | 38.10 ± 0.5 |
| Lead Space (S) | 8.40 | 10.15 | 15.00 | 15.00 | 15.00 | 16.20 | 16.20 | 17.80 | 21.30 | 11.20 | 21.50 |
| Lead Width (S1) | 5.08 | 7.62 | 7.62 | 10.16 | 15.24 | 10.16 | 15.24 | 10.16 | 10.16 | 27.94 | 30.48 |
| Nb 2.54 sp (x) | 2 | 3 | 3 | 4 | 6 | 4 | 6 | 4 | 4 | 11 | 12 |
| Lead diam (d) | 0.8 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 |
| Min Height (H) | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 4 | 6 |
| Max Height (H) | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 20,1 | 18 |
| Lead Lenght (F) | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 |

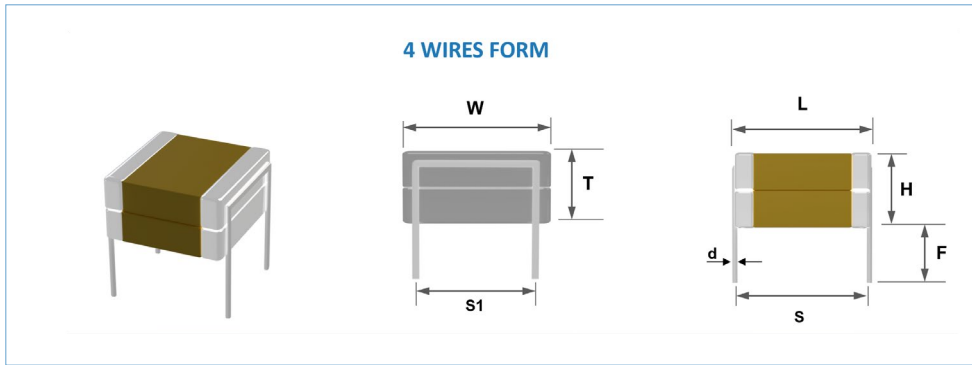

QUICK REFERENCE DATA (Max capacitance)

| | 1210 | | | 1812 | | | 1825 | | | 2220 | | | 2225 | | | 2825 | | | Height H (1/10 mm) |
|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | |
| min | 12 nF | 39 nF | 150 nF | 27 nF | 82 nF | 330 nF | 56 nF | 180 nF | 820 nF | 56 nF | 180 nF | 820 nF | 68 nF | 220 nF | 1.0 µF | 100 nF | 330 nF | 1.2 µF | |
| 16V | 220 nF | 68 nF | 22 µF | 220 nF | 150 nF | 15 µF | 82 nF | 330 nF | 2.2 µF | 470 nF | 330 nF | 10 µF | 100 nF | 390 nF | 3.3 µF | 120 nF | 470 nF | 3.3 µF | 020 |
| | 220 nF | 220 nF | 22 µF | 470 nF | 470 nF | 33 µF | 150 nF | 1.0 µF | 10 µF | 1.0 µF | 22 µF | 180 nF | 820 nF | 10 µF | 270 nF | 1.0 µF | 5.6 µF | 040 | |
| | 470 nF | 270 nF | 47 µF | 680 nF | 560 nF | 68 µF | 330 nF | 1.2 µF | 18 µF | 1.5 µF | 47 µF | 390 nF | 1.5 µF | 18 µF | 390 nF | 1.5 µF | 10 µF | 060 | |
| | | | | | | | 390 nF | 1.8 µF | 27 µF | 1.8 µF | 1.8 µF | 68 µF | 470 nF | 1.8 µF | 27 µF | 470 nF | 1.8 µF | 12 µF | 080 |
| 25V | 220 nF | 68 nF | 22 µF | 220 nF | 150 nF | 10 µF | 82 nF | 330 nF | 2.2 µF | 470 nF | 330 nF | 10 µF | 100 nF | 390 nF | 3.3 µF | 120 nF | 470 nF | 3.3 µF | 020 |
| | 470 nF | 220 nF | 2.7 µF | 68 nF | 470 nF | 2.7 µF | 150 nF | 1.0 µF | 5.6 µF | 180 nF | 1.0 µF | 6.8 µF | 180 nF | 820 nF | 4.7 µF | 270 nF | 1.0 µF | 5.6 µF | 040 |
| | | 270 nF | 2.2 µF | 150 nF | 560 nF | 3.9 µF | 330 nF | 1.2 µF | 8.2 µF | 330 nF | 1.2 µF | 8.2 µF | 390 nF | 1.5 µF | 10 µF | 390 nF | 1.5 µF | 10 µF | 060 |
| | | | | | | | 390 nF | 1.8 µF | 12 µF | 390 nF | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 080 |
| 50V | 150 nF | 68 nF | 10 µF | 220 nF | 150 nF | 2.2 µF | 82 nF | 330 nF | 2.2 µF | 470 nF | 330 nF | 4.7 µF | 100 nF | 390 nF | 3.3 µF | 120 nF | 470 nF | 3.3 µF | 020 |
| | 56 nF | 220 nF | 1.2 µF | 68 nF | 470 nF | 2.7 µF | 150 nF | 1.0 µF | 5.6 µF | 180 nF | 1.0 µF | 6.8 µF | 180 nF | 820 nF | 4.7 µF | 270 nF | 1.0 µF | 5.6 µF | 040 |
| | 68 nF | 270 nF | 2.2 µF | 150 nF | 560 nF | 3.9 µF | 330 nF | 1.2 µF | 8.2 µF | 330 nF | 1.2 µF | 8.2 µF | 390 nF | 1.5 µF | 10 µF | 390 nF | 1.5 µF | 10 µF | 060 |
| | | | | | | | 390 nF | 1.8 µF | 12 µF | 390 nF | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 080 |
| 100V | 100 nF | 68 nF | 4.7 µF | 150 nF | 150 nF | 1.0 µF | 82 nF | 330 nF | 2.2 µF | 330 nF | 330 nF | 3.3 µF | 100 nF | 390 nF | 3.3 µF | 120 nF | 470 nF | 3.3 µF | 020 |
| | 56 nF | 220 nF | 1.2 µF | 68 nF | 470 nF | 2.7 µF | 150 nF | 1.0 µF | 5.6 µF | 180 nF | 1.0 µF | 6.8 µF | 180 nF | 820 nF | 4.7 µF | 270 nF | 1.0 µF | 5.6 µF | 040 |
| | 68 nF | 270 nF | 2.2 µF | 150 nF | 560 nF | 3.9 µF | 330 nF | 1.2 µF | 8.2 µF | 330 nF | 1.2 µF | 8.2 µF | 390 nF | 1.5 µF | 10 µF | 390 nF | 1.5 µF | 10 µF | 060 |
| | | | | | | | 390 nF | 1.8 µF | 12 µF | 390 nF | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 080 |
| 250V | 18 nF | 68 nF | 390 nF | 39 nF | 150 nF | 820 nF | 82 nF | 330 nF | 1.8 µF | 82 nF | 330 nF | 1.8 µF | 100 nF | 390 nF | 2.2 µF | 120 nF | 470 nF | 2.7 µF | 020 |
| | 33 nF | 220 nF | 1.2 µF | 68 nF | 270 nF | 1.5 µF | 150 nF | 680 nF | 3.3 µF | 180 nF | 680 nF | 3.9 µF | 180 nF | 820 nF | 4.7 µF | 270 nF | 1.0 µF | 5.6 µF | 040 |
| | 68 nF | 270 nF | 1.5 µF | 150 nF | 560 nF | 3.3 µF | 330 nF | 1.2 µF | 6.8 µF | 330 nF | 1.2 µF | 6.8 µF | 390 nF | 1.5 µF | 10 µF | 390 nF | 1.5 µF | 10 µF | 060 |
| | | | | | | | 390 nF | 1.5 µF | 8.2 µF | 390 nF | 1.8 µF | 10 µF | 470 nF | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 080 |
| 500V | 15 nF | 39 nF | 180 nF | 33 nF | 82 nF | 390 nF | 68 nF | 180 nF | 820 nF | 82 nF | 220 nF | 820 nF | 100 nF | 270 nF | 1.0 µF | 120 nF | 330 nF | 1.2 µF | 020 |
| | 33 nF | 82 nF | 390 nF | 68 nF | 180 nF | 390 nF | 150 nF | 390 nF | 820 nF | 150 nF | 390 nF | 820 nF | 180 nF | 470 nF | 1.0 µF | 220 nF | 680 nF | 1.2 µF | 040 |
| | 68 nF | 120 nF | 560 nF | 100 nF | 270 nF | 820 nF | 220 nF | 560 nF | 1.8 µF | 220 nF | 560 nF | 1.8 µF | 270 nF | 820 nF | 2.2 µF | 390 nF | 1.0 µF | 2.7 µF | 060 |
| | | | | | | | 390 nF | 820 nF | 2.7 µF | 390 nF | 820 nF | 2.7 µF | 470 nF | 1.0 µF | 3.3 µF | 470 nF | 1.2 µF | 3.9 µF | 080 |
| | | | | | | 470 nF | 1.0 µF | 4.7 µF | 470 nF | 1.0 µF | 3.3 µF | 560 nF | 1.2 µF | 6.8 µF | 560 nF | 1.5 µF | 5.6 µF | 100 | |
| | | | | | | | | | | | | | | | | | | 140 | |



QUICK REFERENCE DATA (Max capacitance)

| | 3033 | | | 3640 | | | 4040 | | | 40100 | | | 5550 | | | 6080 | | | Height H (1/10 mm) |
|--------------|--------|--------|--------|---------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | |
| min | 39 nF | 120 nF | 270 nF | 56 nF | 150 nF | 390 nF | 56 nF | 180 nF | 470 nF | 150 nF | 470 nF | 1.2 µF | 100 nF | 330 nF | 820 nF | 180 nF | 560 nF | 1.5 µF | |
| 100V | 180 nF | 680 nF | 3.9 µF | <i>330 nF</i> | 1.0 µF | 5.6 µF | 270 nF | 1.0 µF | 6.8 µF | 820 nF | 2.7 µF | 18 µF | 390 nF | 1.5 µF | 10 µF | 680 nF | 2.7 µF | 15 µF | 020 |
| | 330 nF | 1.2 µF | 8.2 µF | <i>470 nF</i> | 1.8 µF | 12 µF | 270 nF | 1.0 µF | 6.8 µF | 820 nF | 2.7 µF | 18 µF | 390 nF | 1.5 µF | 10 µF | 680 nF | 2.7 µF | 15 µF | 040 |
| | 560 nF | 1.8 µF | 12 µF | <i>680 nF</i> | 2.7 µF | 18 µF | 560 nF | 2.2 µF | 12 µF | 1.5 µF | 5.6 µF | 39 µF | 820 nF | 3.3 µF | 22 µF | 1.2 µF | 5.6 µF | 33 µF | 060 |
| | 820 nF | 3.3 µF | 22 µF | <i>1.2 µF</i> | 4.7 µF | 27 µF | 1.0 µF | 3.9 µF | 27 µF | 3.3 µF | 12 µF | 82 µF | 1.2 µF | 4.7 µF | 33 µF | 1.8 µF | 8.2 µF | 47 µF | 100 |
| 200V | 180 nF | 680 nF | 3.9 µF | <i>330 nF</i> | 1.0 µF | 5.6 µF | 270 nF | 1.0 µF | 6.8 µF | 820 nF | 2.7 µF | 18 µF | 390 nF | 1.5 µF | 10 µF | 680 nF | 2.7 µF | 15 µF | 020 |
| | 330 nF | 1.2 µF | 8.2 µF | <i>470 nF</i> | 1.8 µF | 12 µF | 270 nF | 1.0 µF | 6.8 µF | 820 nF | 2.7 µF | 18 µF | 390 nF | 1.5 µF | 10 µF | 680 nF | 2.7 µF | 15 µF | 040 |
| | 560 nF | 1.8 µF | 12 µF | <i>680 nF</i> | 2.7 µF | 18 µF | 560 nF | 2.2 µF | 12 µF | 1.5 µF | 5.6 µF | 39 µF | 820 nF | 3.3 µF | 22 µF | 1.2 µF | 5.6 µF | 33 µF | 060 |
| | 820 nF | 3.3 µF | 22 µF | <i>1.2 µF</i> | 4.7 µF | 27 µF | 1.0 µF | 3.9 µF | 27 µF | 3.3 µF | 12 µF | 82 µF | 1.2 µF | 4.7 µF | 33 µF | 1.8 µF | 8.2 µF | 47 µF | 100 |
| 250V | 180 nF | 680 nF | 3.9 µF | 220 nF | 1.0 µF | 5.6 µF | 270 nF | 1.0 µF | 6.8 µF | 820 nF | 2.7 µF | 18 µF | 390 nF | 1.5 µF | 10 µF | 680 nF | 2.7 µF | 15 µF | 020 |
| | 330 nF | 1.2 µF | 8.2 µF | 470 nF | 1.8 µF | 12 µF | 270 nF | 1.0 µF | 6.8 µF | 820 nF | 2.7 µF | 18 µF | 390 nF | 1.5 µF | 10 µF | 680 nF | 2.7 µF | 15 µF | 040 |
| | 560 nF | 1.8 µF | 12 µF | 680 nF | 2.7 µF | 18 µF | 560 nF | 2.2 µF | 12 µF | 1.5 µF | 5.6 µF | 39 µF | 820 nF | 3.3 µF | 22 µF | 1.2 µF | 5.6 µF | 33 µF | 060 |
| | 820 nF | 3.3 µF | 22 µF | 1.2 µF | 4.7 µF | 27 µF | 1.0 µF | 3.9 µF | 27 µF | 3.3 µF | 12 µF | 82 µF | 1.2 µF | 4.7 µF | 33 µF | 1.8 µF | 8.2 µF | 47 µF | 100 |
| 500V | 180 nF | 470 nF | 1.8 µF | 220 nF | 680 nF | 2.7 µF | 270 nF | 680 nF | 3.3 µF | 820 nF | 2.7 µF | 12 µF | 390 nF | 1.2 µF | 5.6 µF | 680 nF | 2.2 µF | 8.2 µF | 020 |
| | 330 nF | 820 nF | 1.8 µF | 470 nF | 1.2 µF | 2.7 µF | 270 nF | 680 nF | 3.3 µF | 820 nF | 2.7 µF | 12 µF | 390 nF | 1.2 µF | 5.6 µF | 680 nF | 2.2 µF | 10 µF | 040 |
| | 560 nF | 1.2 µF | 3.9 µF | 680 nF | 1.8 µF | 5.6 µF | 560 nF | 1.5 µF | 6.8 µF | 1.5 µF | 5.6 µF | 22 µF | 820 nF | 2.7 µF | 10 µF | 1.2 µF | 4.7 µF | 060 | |
| | 820 nF | 2.2 µF | 8.2 µF | 1.2 µF | 3.3 µF | 12 µF | 1.0 µF | 2.7 µF | 12 µF | 3.3 µF | 12 µF | 47 µF | 1.2 µF | 3.9 µF | 15 µF | 1.8 µF | 6.8 µF | 27 µF | 100 |
| 630V | 120 nF | 330 nF | 1.0 µF | 180 nF | 470 nF | 1.5 µF | 220 nF | 470 nF | 1.8 µF | 820 nF | 1.8 µF | 6.8 µF | 390 nF | 820 nF | 2.7 µF | 680 nF | 1.5 µF | 4.7 µF | 020 |
| | 270 nF | 390 nF | 1.5 µF | 390 nF | 560 nF | 2.2 µF | 220 nF | 560 nF | 2.2 µF | 820 nF | 2.2 µF | 8.2 µF | 390 nF | 1.0 µF | 3.9 µF | 680 nF | 1.8 µF | 6.8 µF | 040 |
| | 390 nF | 680 nF | 2.7 µF | 560 nF | 1.0 µF | 3.9 µF | 470 nF | 1.2 µF | 4.7 µF | 1.5 µF | 4.7 µF | 18 µF | 820 nF | 1.8 µF | 8.2 µF | 1.2 µF | 3.3 µF | 060 | |
| | 680 nF | 1.5 µF | 4.7 µF | 1.0 µF | 2.2 µF | 6.8 µF | 820 nF | 2.2 µF | 6.8 µF | 3.3 µF | 8.2 µF | 27 µF | 1.2 µF | 2.7 µF | 1.8 µF | 5.6 µF | 2.2 µF | 100 | |
| 1000V | 56 nF | 120 nF | 390 nF | 82 nF | 180 nF | 560 nF | 100 nF | 180 nF | 680 nF | 390 nF | 680 nF | 2.2 µF | 180 nF | 330 nF | 1.0 µF | 270 nF | 560 nF | 1.8 µF | 020 |
| | 82 nF | 220 nF | 820 nF | 120 nF | 330 nF | 1.2 µF | 150 nF | 390 nF | 1.5 µF | 560 nF | 1.5 µF | 5.6 µF | 220 nF | 680 nF | 2.2 µF | 390 nF | 1.0 µF | 3.9 µF | 040 |
| | 180 nF | 220 nF | 820 nF | 270 nF | 330 nF | 1.2 µF | 270 nF | 390 nF | 1.5 µF | 1.0 µF | 1.5 µF | 5.6 µF | 470 nF | 680 nF | 2.2 µF | 820 nF | 1.0 µF | 3.9 µF | 060 |
| | 270 nF | 680 nF | 1.8 µF | 390 nF | 1.0 µF | 2.7 µF | 390 nF | 1.2 µF | 2.7 µF | 1.5 µF | 3.9 µF | 10 µF | 680 nF | 1.8 µF | 4.7 µF | 1.2 µF | 3.3 µF | 100 | |
| 390 nF | 820 nF | 2.7 µF | 680 nF | 1.2 µF | 3.9 µF | 680 nF | 1.5 µF | 3.9 µF | 2.7 µF | 5.6 µF | 15 µF | 1.2 µF | 2.7 µF | 6.8 µF | 2.2 µF | 4.7 µF | 12 µF | 140 | |
| | 1.2 µF | 3.3 µF | 680 nF | 1.8 µF | 4.7 µF | 820 nF | 1.8 µF | 5.6 µF | 3.3 µF | 6.8 µF | 22 µF | 1.5 µF | 3.3 µF | 10 µF | 2.7 µF | 5.6 µF | 15 µF | 180 | |

1) Max Values in italic obtained with BME parts

QUICK REFERENCE DATA (Max capacitance)

| | 6660 | | | 8060 | | | 80150 | | | Height H (1/10 mm) |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | |
| min | 150 nF | 470 nF | 1.2 µF | 180 nF | 560 nF | 1.5 µF | 470 nF | 1.2 µF | 3.3 µF | |
| 100V | 560 nF | 2.2 µF | 15 µF | 680 nF | 2.7 µF | 15 µF | 1.2 µF | 5.6 µF | 33 µF | 020 |
| | 560 nF | 2.2 µF | 15 µF | 680 nF | 2.7 µF | 15 µF | 1.2 µF | 5.6 µF | 33 µF | 040 |
| | 1.2 µF | 4.7 µF | 27 µF | 1.2 µF | 5.6 µF | 33 µF | 2.7 µF | 10 µF | 68 µF | 060 |
| | 1.8 µF | 6.8 µF | 39 µF | 1.8 µF | 8.2 µF | 47 µF | 3.9 µF | 15 µF | 100 µF | 100 |
| 200V | 2.7 µF | 12 µF | 68 µF | 3.3 µF | 12 µF | 82 µF | 6.8 µF | 27 µF | 150 µF | 140 |
| | 3.3 µF | 12 µF | 82 µF | 3.9 µF | 15 µF | 100 µF | 8.2 µF | 33 µF | 180 µF | 180 |
| | 560 nF | 2.2 µF | 15 µF | 680 nF | 2.7 µF | 15 µF | 1.2 µF | 5.6 µF | 33 µF | 020 |
| | 560 nF | 2.2 µF | 15 µF | 680 nF | 2.7 µF | 15 µF | 1.2 µF | 5.6 µF | 33 µF | 040 |
| 250V | 1.2 µF | 4.7 µF | 27 µF | 1.2 µF | 5.6 µF | 33 µF | 2.7 µF | 10 µF | 68 µF | 060 |
| | 1.8 µF | 6.8 µF | 39 µF | 1.8 µF | 8.2 µF | 47 µF | 3.9 µF | 15 µF | 100 µF | 100 |
| | 2.7 µF | 12 µF | 68 µF | 3.3 µF | 12 µF | 82 µF | 6.8 µF | 27 µF | 150 µF | 140 |
| | 3.3 µF | 12 µF | 82 µF | 3.9 µF | 15 µF | 100 µF | 8.2 µF | 33 µF | 180 µF | 180 |
| 500V | 560 nF | 2.2 µF | 15 µF | 680 nF | 2.7 µF | 15 µF | 1.2 µF | 5.6 µF | 33 µF | 020 |
| | 560 nF | 1.8 µF | 6.8 µF | 680 nF | 2.2 µF | 10 µF | 1.2 µF | 5.6 µF | 22 µF | 040 |
| | 1.2 µF | 3.9 µF | 15 µF | 1.2 µF | 4.7 µF | 18 µF | 2.7 µF | 10 µF | 47 µF | 060 |
| | 1.8 µF | 5.6 µF | 22 µF | 1.8 µF | 6.8 µF | 27 µF | 3.9 µF | 15 µF | 68 µF | 100 |
| 630V | 2.7 µF | 8.2 µF | 39 µF | 3.3 µF | 10 µF | 47 µF | 6.8 µF | 27 µF | 120 µF | 140 |
| | 3.3 µF | 10 µF | 47 µF | 3.9 µF | 12 µF | 56 µF | 8.2 µF | 33 µF | 150 µF | 180 |
| | 560 nF | 1.2 µF | 3.9 µF | 680 nF | 1.5 µF | 4.7 µF | 1.2 µF | 3.9 µF | 12 µF | 020 |
| | 560 nF | 1.5 µF | 5.6 µF | 680 nF | 1.8 µF | 6.8 µF | 1.2 µF | 4.7 µF | 18 µF | 040 |
| 1000V | 1.0 µF | 2.7 µF | 12 µF | 1.2 µF | 3.3 µF | 15 µF | 2.7 µF | 8.2 µF | 33 µF | 060 |
| | 1.5 µF | 3.9 µF | 18 µF | 1.8 µF | 5.6 µF | 22 µF | 3.9 µF | 12 µF | 56 µF | 100 |
| | 2.7 µF | 6.8 µF | 27 µF | 3.3 µF | 8.2 µF | 33 µF | 6.8 µF | 22 µF | 82 µF | 140 |
| | 3.3 µF | 8.2 µF | 33 µF | 3.9 µF | 10 µF | 39 µF | 8.2 µF | 27 µF | 100 µF | 180 |
| 1000V | 220 nF | 470 nF | 1.5 µF | 270 nF | 560 nF | 1.8 µF | 680 nF | 1.5 µF | 4.7 µF | 020 |
| | 330 nF | 820 nF | 3.3 µF | 390 nF | 1.0 µF | 3.9 µF | 1.0 µF | 2.7 µF | 10 µF | 040 |
| | 680 nF | 820 nF | 3.3 µF | 820 nF | 1.0 µF | 3.9 µF | 2.2 µF | 2.7 µF | 10 µF | 060 |
| | 1.0 µF | 2.7 µF | 6.8 µF | 1.2 µF | 3.3 µF | 8.2 µF | 3.3 µF | 8.2 µF | 22 µF | 100 |
| 1000V | 1.8 µF | 3.9 µF | 10 µF | 2.2 µF | 4.7 µF | 12 µF | 5.6 µF | 10 µF | 33 µF | 140 |
| | 2.2 µF | 4.7 µF | 12 µF | 2.7 µF | 5.6 µF | 15 µF | 5.6 µF | 12 µF | 39 µF | 180 |

This document is subject to change without notice.

STACKED CAPACITOR High Voltage


NPO N2T X7R 1KV-10KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Switch Mode Power Capacitor
- for Input / Output Filtering

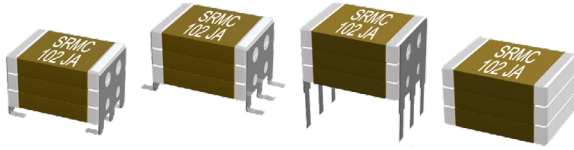

RoHS
compliant

FEATURES

- High reliability, 100% burn-in
- Low ESR and ESL design
- High frequency switch
- Custom designs with any size, voltage, capacity, leads...
- Marking

ORDERING INFORMATION


| SRMC | 2225 | Y | 102 | J | G | - | L | 100 | - | B | - |
|--------|--|---|--|--|--|-----------------------------------|---------------------------------|---|--|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | LEAD FRAME | FORM | HEIGHT (H) | COATING | PACKAGING | SPECIAL |
| SRMC | 1812 1825 2220 2225 3033 3640 4040 40100 5550 6560 6660 8060 80150 | A = NPO P = N2T Y = X7R X = BX BY = 2C1 | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ± 0.05 pF if < 10pF and 0.05% if > 10pF B = ± 0.1 pF C = ± 0.25 pF D = ± 0.5 pF F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$ | G = 1KV H = 2KV I = 3KV L = 5KV 8 = 8KV 10 = 10KV | - = Tin Plated N = SnPb Plated | L J D M U = 4 leads | 020 030 040 050 060 070 080 090 100 110 120 130 140 160 180 | - I = Conformal Coating H = EpoxyCoating | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For J, L, M form, total height (T) is obtained by adding lead height (C/E) to specified chip height (H) in 1/10mm

For other sizes, voltage, tolerance contact us

DIMENSIONS (IN MILLIMETERS)

| | 1812 | 1825 | 2220 | 2225 | 2825 | 3033 | 3640 | 4040 | 40100 | 5550 | 6080 | 6560 /6660 | 8060 | 80150 |
|-----------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Lenght (L) | 5.10 ± 0.4 | 5.10 ± 0.4 | 6.20 ± 0.4 | 6.20 ± 0.4 | 7.70 ± 0.4 | 8.20 ± 0.4 | 9.75 ± 0.5 | 10.80 ± 0.8 | 10.80 ± 1.0 | 14.60 ± 1.0 | 15.80 ± 1.0 | 17.40 ± 1.0 | 20.90 ± 1.0 | 20.90 ± 1.0 |
| Width (W) | 3.20 ± 0.4 | 6.35 ± 0.4 | 5.10 ± 0.4 | 6.35 ± 0.4 | 6.35 ± 0.4 | 8.40 ± 0.4 | 10.20 ± 0.5 | 10.20 ± 0.8 | 25.40 ± 1.0 | 12.70 ± 1.0 | 20.30 ± 1.0 | 15.20 ± 1.0 | 15.20 ± 1.0 | 38.10 ± 1.0 |
| Nb of Leads | 2 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 10 | 5 | 8 | 6 | 6 | 15 |
| Min Height (T) | 2.8 | 3.0 | 3.0 | 3.1 | 3.4 | 3.5 | 3.6 | 4.0 | 4.0 | 4.3 | 4.4 | 4.5 | 4.5 | 4.5 |
| Max Height (T) | 9.6 | 16.2 | 16.2 | 16.2 | 16.9 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 |
| Lead Height (C) | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 |
| lead Lenght (D) | 1.4 ± 0.3 | 1.6 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 |
| Lead Height (E) | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 |
| Lead Lenght (F) | 4.0 ± 1.0 | 4.5 ± 1.0 | 5.0 ± 1.0 | 5.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 |

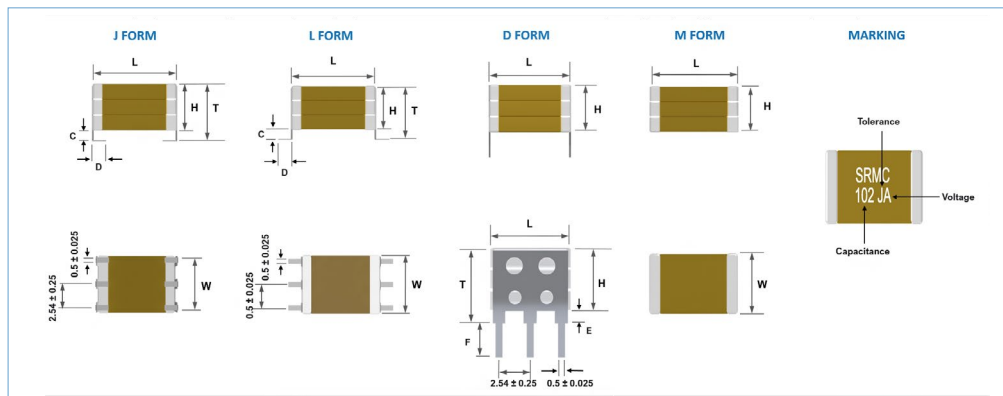

This document is subject to change without notice.

STACKED CAPACITOR High Voltage


NPO N2T X7R 1KV-10KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

DIMENSIONS 4 WIRES (In millimeters)

| | 3033 | 3640 | 5550 | 5550 | 5550 | 6080 | 6080 | 6660 | 8060 | 40100 | 80150 |
|-----------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Lenght (L) | 9.20 ± 0.5 | 11.15 ± 0.5 | 16.00 ± 0.5 | 16.00 ± 0.5 | 16.00 ± 0.5 | 17.20 ± 0.5 | 17.20 ± 0.5 | 18.80 ± 0.5 | 22.30 ± 0.5 | 12.20 ± 0.5 | 22.70 ± 0.5 |
| Width (W) | 8.40 ± 0.5 | 10.20 ± 0.5 | 12.70 ± 0.5 | 12.70 ± 0.5 | 12.70 ± 0.5 | 20.30 ± 0.5 | 20.30 ± 0.5 | 15.20 ± 0.5 | 15.20 ± 0.5 | 25.40 ± 0.5 | 38.10 ± 0.5 |
| Lead Space (S) | 8.40 | 10.15 | 15.00 | 15.00 | 15.00 | 16.20 | 16.20 | 17.80 | 21.30 | 11.20 | 21.50 |
| Lead Width (S1) | 5.08 | 7.62 | 7.62 | 10.16 | 15.24 | 10.16 | 15.24 | 10.16 | 10.16 | 27.94 | 30.48 |
| Nb 2.54 sp (x) | 2 | 3 | 3 | 4 | 6 | 4 | 6 | 4 | 4 | 11 | 12 |
| Lead diam (d) | 0.8 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 |
| Min Height (H) | 3.5 | 3.6 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 4.5 | 4.5 | 4 | 4.5 |
| Max Height (H) | 20,1 | 20,1 | 20,1 | 20,1 | 20,1 | 20,1 | 20,1 | 20,1 | 20,1 | 20,1 | 20,1 |
| Lead Lenght (F) | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 | 25 ± 1.0 |

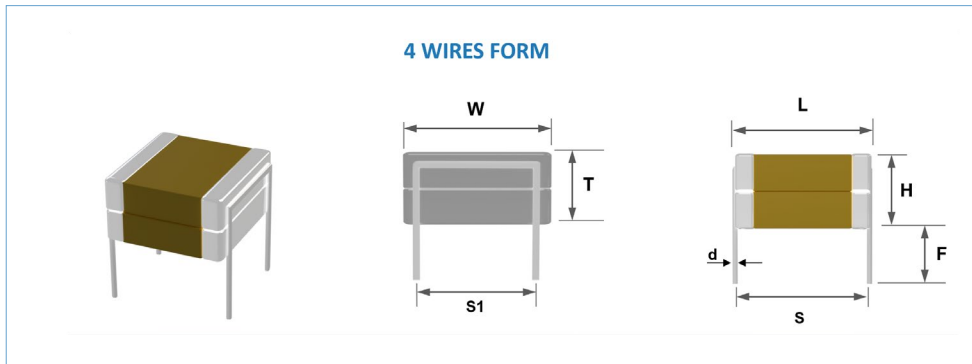

QUICK REFERENCE DATA (Max capacitance)

| | 1812 | | | 1825 | | | 2220 | | | 2225 | | | 3033 | | | 3640 | | | Height H (1/10 mm) | |
|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------------|-----|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | | |
| min | 12 pF | 39 pF | 1.0 nF | 33 pF | 100 pF | 2.2 nF | 82 pF | 220 pF | 470 pF | 100 pF | 220 pF | 560 pF | 180 pF | 560 pF | 1.2 nF | 270 pF | 820 pF | 1.8 nF | | |
| 1KV | 12 nF | 22 nF | 68 nF | 27 nF | 56 nF | 150 nF | 27 nF | 56 nF | 150 nF | 33 nF | 68 nF | 220 nF | 56 nF | 120 nF | 390 nF | 82 nF | 180 nF | 560 nF | 560 nF | 020 |
| | 18 nF | 47 nF | 120 nF | 39 nF | 100 nF | 330 nF | 39 nF | 100 nF | 390 nF | 47 nF | 120 nF | 470 nF | 82 nF | 220 nF | 820 nF | 120 nF | 330 nF | 1.2 μF | 040 | |
| | 33 nF | 47 nF | 120 nF | 68 nF | 100 nF | 330 nF | 82 nF | 100 nF | 390 nF | 100 nF | 120 nF | 470 nF | 180 nF | 220 nF | 820 nF | 270 nF | 330 nF | 1.2 μF | 060 | |
| | | | | 120 nF | 270 nF | 680 nF | 120 nF | 330 nF | 820 nF | 150 nF | 390 nF | 1.0 μF | 270 nF | 680 nF | 1.8 μF | 390 nF | 1.0 μF | 2.7 μF | 100 | |
| 2KV | 2.2 nF | 3.9 nF | 12 nF | 4.7 nF | 10 nF | 33 nF | 5.6 nF | 10 nF | 33 nF | 6.8 nF | 12 nF | 39 nF | 12 nF | 22 nF | 82 nF | 18 nF | 33 nF | 120 nF | 020 | |
| | 4.7 nF | 6.8 nF | 22 nF | 12 nF | 15 nF | 56 nF | 12 nF | 15 nF | 68 nF | 18 nF | 22 nF | 100 nF | 27 nF | 39 nF | 180 nF | 47 nF | 56 nF | 270 nF | 040 | |
| | 4.7 nF | 12 nF | 22 nF | 12 nF | 33 nF | 56 nF | 12 nF | 33 nF | 68 nF | 18 nF | 39 nF | 100 nF | 27 nF | 82 nF | 180 nF | 47 nF | 120 nF | 270 nF | 060 | |
| | | | | 22 nF | 47 nF | 120 nF | 27 nF | 47 nF | 150 nF | 33 nF | 56 nF | 180 nF | 100 nF | 56 nF | 120 nF | 390 nF | 180 nF | 180 nF | 560 nF | 100 |
| 3KV | 820 pF | 1.5 nF | 5.6 nF | 1.8 nF | 3.3 nF | 12 nF | 1.8 nF | 3.9 nF | 12 nF | 2.7 nF | 4.7 nF | 18 nF | 4.7 nF | 8.2 nF | 33 nF | 6.8 nF | 12 nF | 47 nF | 020 | |
| | 1.2 nF | 2.7 nF | 10 nF | 2.7 nF | 5.6 nF | 27 nF | 2.7 nF | 6.8 nF | 27 nF | 3.9 nF | 10 nF | 33 nF | 8.2 nF | 18 nF | 68 nF | 12 nF | 27 nF | 100 nF | 040 | |
| | 2.2 nF | 5.6 nF | 10 nF | 5.6 nF | 12 nF | 27 nF | 5.6 nF | 6.8 nF | 27 nF | 8.2 nF | 10 nF | 33 nF | 15 nF | 18 nF | 68 nF | 22 nF | 27 nF | 100 nF | 060 | |
| | | | | 8.2 nF | 18 nF | 47 nF | 8.2 nF | 15 nF | 56 nF | 12 nF | 18 nF | 68 nF | 22 nF | 33 nF | 120 nF | 33 nF | 47 nF | 180 nF | 100 | |
| 5KV | 220 pF | 470 pF | 1.5 nF | 560 pF | 1.0 nF | 3.3 nF | 560 pF | 1.2 nF | 3.9 nF | 680 pF | 1.5 nF | 4.7 nF | 15 nF | 2.7 nF | 10 nF | 2.2 nF | 10 nF | 3.9 nF | 020 | |
| | 390 pF | 820 pF | 2.7 nF | 1.2 nF | 2.2 nF | 8.2 nF | 1.5 nF | 2.2 nF | 10 nF | 1.8 nF | 3.3 nF | 12 nF | 3.9 nF | 5.6 nF | 22 nF | 4.7 nF | 8.2 nF | 33 nF | 040 | |
| | 390 pF | 820 pF | 2.7 nF | 1.2 nF | 2.2 nF | 8.2 nF | 1.5 nF | 2.2 nF | 10 nF | 1.8 nF | 3.3 nF | 12 nF | 3.9 nF | 5.6 nF | 22 nF | 4.7 nF | 8.2 nF | 33 nF | 060 | |
| | | | | 2.2 nF | 4.7 nF | 15 nF | 2.2 nF | 4.7 nF | 18 nF | 3.9 nF | 6.8 nF | 27 nF | 6.8 nF | 12 nF | 47 nF | 15 nF | 18 nF | 68 nF | 100 | |
| 8KV | 82 pF | 120 pF | 390 pF | 180 pF | 270 pF | 1.0 nF | 220 pF | 390 pF | 1.2 nF | 270 pF | 470 pF | 1.5 nF | 560 pF | 1.0 nF | 2.7 nF | 680 pF | 1.5 nF | 3.9 nF | 020 | |
| | 150 pF | 270 pF | 1.0 nF | 390 pF | 680 pF | 2.7 nF | 390 pF | 820 pF | 2.7 nF | 560 pF | 1.2 nF | 3.9 nF | 1.0 nF | 2.2 nF | 6.8 nF | 1.5 nF | 3.3 nF | 10 nF | 040 | |
| | 150 pF | 270 pF | 1.0 nF | 390 pF | 680 pF | 2.7 nF | 390 pF | 820 pF | 2.7 nF | 560 pF | 1.2 nF | 3.9 nF | 1.0 nF | 2.2 nF | 6.8 nF | 1.5 nF | 3.3 nF | 10 nF | 060 | |
| | | | | 820 pF | 1.5 nF | 5.6 nF | 820 pF | 1.8 nF | 5.6 nF | 1.0 nF | 2.2 nF | 8.2 nF | 1.8 nF | 4.7 nF | 15 nF | 2.7 nF | 6.8 nF | 22 nF | 100 | |
| 10KV | 39 pF | 39 pF | | 100 pF | 100 pF | | 120 pF | 220 pF | 680 pF | 150 pF | 220 pF | 820 pF | 330 pF | 560 pF | 1.8 nF | 670 pF | 820 pF | 2.7 nF | 020 | |
| | 100 pF | 100 pF | | 220 pF | 270 pF | | 270 pF | 470 pF | 1.5 nF | 390 pF | 680 pF | 1.8 nF | 680 pF | 1.2 nF | 3.9 nF | 1.0 nF | 1.8 nF | 5.6 nF | 040 | |
| | 100 pF | 100 pF | | 220 pF | 270 pF | | 270 pF | 470 pF | 1.5 nF | 390 pF | 680 pF | 1.8 nF | 680 pF | 1.2 nF | 3.9 nF | 1.0 nF | 1.8 nF | 5.6 nF | 060 | |
| | | | | 470 pF | 560 pF | 820 pF | 560 pF | 1.0 nF | 3.9 nF | 1.2 nF | 5.6 nF | 1.2 nF | 5.6 nF | 1.5 nF | 2.7 nF | 10 nF | 2.2 nF | 3.9 nF | 15 nF | 100 |
| | | | 680 pF | 820 pF | | | | | 1.2 nF | 1.8 nF | 6.8 nF | 2.2 nF | 3.9 nF | 15 nF | 3.3 nF | 5.6 nF | 22 nF | 140 | | |
| | | | | | | | | | | | | | | | | | | | 180 | |

This document is subject to change without notice.



QUICK REFERENCE DATA (Max capacitance)

| | 4040 | | | 40100 | | | 5550 | | | 6660 | | | 8060 | | | 80150 | | | Height H (1/10 mm) |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------------------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | |
| | 330 pF | 820 pF | 1.8 nF | 820 pF | 2.2 nF | 4.7 nF | 560 pF | 1.5 nF | 3.3 nF | 820 pF | 2.2 nF | 4.7 nF | 1.0 nF | 2.7 nF | 5.6 nF | 2.2 nF | 6.8 nF | 15 nF | |
| 1KV | 100 nF | 180 nF | 680 nF | 220 nF | 470 nF | 1.5 µF | 180 nF | 330 nF | 1.0 µF | 220 nF | 470 nF | 1.5 µF | 270 nF | 560 nF | 1.8 µF | 680 nF | 1.5 µF | 4.7 µF | 020 |
| | 150 nF | 390 nF | 1.5 µF | 330 nF | 1.0 µF | 3.3 µF | 220 nF | 680 nF | 2.2 µF | 330 nF | 820 nF | 3.3 µF | 390 nF | 1.0 µF | 3.9 µF | 1.0 µF | 2.7 µF | 10 µF | 040 |
| | 270 nF | 390 nF | 1.5 µF | 680 nF | 1.0 µF | 3.3 µF | 470 nF | 680 nF | 2.2 µF | 680 nF | 820 nF | 3.3 µF | 820 nF | 1.0 µF | 3.9 µF | 2.2 µF | 2.7 µF | 10 µF | 060 |
| | 390 nF | 1.2 µF | 2.7 µF | 1.0 µF | 2.7 µF | 6.8 µF | 680 nF | 1.8 µF | 4.7 µF | 1.0 µF | 2.7 µF | 6.8 µF | 1.2 µF | 3.3 µF | 8.2 µF | 3.3 µF | 8.2 µF | 22 µF | 100 |
| | 680 nF | 1.5 µF | 3.9 µF | 1.8 µF | 3.9 µF | 10 µF | 1.2 µF | 2.7 µF | 6.8 µF | 1.8 µF | 3.9 µF | 10 µF | 2.2 µF | 4.7 µF | 12 µF | 5.6 µF | 10 µF | 33 µF | 140 |
| 820 nF | 1.8 µF | 5.6 µF | 2.2 µF | 4.7 µF | 15 µF | 1.5 µF | 3.3 µF | 10 µF | 2.2 µF | 4.7 µF | 12 µF | 2.7 µF | 5.6 µF | 15 µF | 5.6 µF | 12 µF | 39 µF | 180 | |
| 2KV | 18 nF | 39 nF | 120 nF | 47 nF | 100 nF | 330 nF | 33 nF | 68 nF | 220 nF | 47 nF | 100 nF | 330 nF | 56 nF | 120 nF | 390 nF | 150 nF | 270 nF | 1.0 µF | 020 |
| | 47 nF | 68 nF | 270 nF | 120 nF | 150 nF | 680 nF | 82 nF | 120 nF | 470 nF | 120 nF | 150 nF | 680 nF | 150 nF | 180 nF | 820 nF | 390 nF | 470 nF | 2.2 µF | 040 |
| | 47 nF | 120 nF | 270 nF | 120 nF | 330 nF | 680 nF | 82 nF | 220 nF | 470 nF | 120 nF | 330 nF | 680 nF | 150 nF | 390 nF | 820 nF | 390 nF | 1.0 µF | 2.2 µF | 060 |
| | 100 nF | 180 nF | 560 nF | 220 nF | 470 nF | 1.5 µF | 150 nF | 330 nF | 1.0 µF | 220 nF | 470 nF | 1.5 µF | 270 nF | 560 nF | 1.8 µF | 680 nF | 1.5 µF | 4.7 µF | 100 |
| | 150 nF | 270 nF | 820 nF | 390 nF | 680 nF | 2.2 µF | 220 nF | 470 nF | 1.5 µF | 330 nF | 680 nF | 2.2 µF | 390 nF | 820 nF | 2.7 µF | 1.0 µF | 1.8 µF | 6.8 µF | 140 |
| 180 nF | 390 nF | 1.2 µF | 470 nF | 1.0 µF | 2.7 µF | 330 nF | 680 nF | 2.2 µF | 470 nF | 1.0 µF | 2.7 µF | 560 nF | 1.2 µF | 3.3 µF | 1.5 µF | 2.7 µF | 8.2 µF | 180 | |
| 3KV | 8.2 nF | 15 nF | 56 nF | 18 nF | 33 nF | 120 nF | 12 nF | 22 nF | 82 nF | 18 nF | 33 nF | 120 nF | 22 nF | 39 nF | 150 nF | 56 nF | 100 nF | 390 nF | 020 |
| | 12 nF | 27 nF | 100 nF | 33 nF | 68 nF | 270 nF | 22 nF | 47 nF | 180 nF | 27 nF | 68 nF | 270 nF | 39 nF | 82 nF | 330 nF | 82 nF | 220 nF | 820 nF | 040 |
| | 22 nF | 27 nF | 100 nF | 56 nF | 68 nF | 270 nF | 39 nF | 47 nF | 180 nF | 56 nF | 68 nF | 270 nF | 68 nF | 82 nF | 330 nF | 180 nF | 220 nF | 820 nF | 060 |
| | 39 nF | 56 nF | 220 nF | 100 nF | 150 nF | 560 nF | 68 nF | 100 nF | 390 nF | 82 nF | 150 nF | 560 nF | 100 nF | 180 nF | 680 nF | 270 nF | 390 nF | 1.5 µF | 100 |
| | 47 nF | 82 nF | 330 nF | 120 nF | 220 nF | 820 nF | 82 nF | 150 nF | 560 nF | 120 nF | 220 nF | 820 nF | 150 nF | 270 nF | 1.0 µF | 390 nF | 680 nF | 2.2 µF | 140 |
| 68 nF | 120 nF | 390 nF | 180 nF | 270 nF | 1.0 µF | 120 nF | 180 nF | 680 nF | 180 nF | 220 nF | 1.0 µF | 220 nF | 330 nF | 1.2 µF | 560 nF | 820 nF | 3.3 µF | 180 | |
| 5KV | 2.2 nF | 4.7 nF | 18 nF | 5.6 nF | 12 nF | 39 nF | 3.9 nF | 8.2 nF | 27 nF | 5.6 nF | 12 nF | 39 nF | 6.8 nF | 12 nF | 47 nF | 18 nF | 33 nF | 120 nF | 020 |
| | 5.6 nF | 10 nF | 39 nF | 15 nF | 22 nF | 100 nF | 10 nF | 18 nF | 68 nF | 15 nF | 22 nF | 100 nF | 18 nF | 27 nF | 120 nF | 39 nF | 68 nF | 270 nF | 040 |
| | 5.6 nF | 10 nF | 39 nF | 15 nF | 22 nF | 100 nF | 10 nF | 18 nF | 68 nF | 15 nF | 22 nF | 100 nF | 18 nF | 27 nF | 120 nF | 39 nF | 68 nF | 270 nF | 060 |
| | 12 nF | 18 nF | 82 nF | 27 nF | 47 nF | 180 nF | 18 nF | 33 nF | 120 nF | 27 nF | 47 nF | 180 nF | 33 nF | 56 nF | 220 nF | 82 nF | 150 nF | 560 nF | 100 |
| | 18 nF | 27 nF | 120 nF | 39 nF | 68 nF | 270 nF | 27 nF | 47 nF | 180 nF | 39 nF | 68 nF | 270 nF | 47 nF | 82 nF | 330 nF | 120 nF | 220 nF | 820 nF | 140 |
| 22 nF | 39 nF | 150 nF | 56 nF | 100 nF | 390 nF | 39 nF | 68 nF | 270 nF | 56 nF | 100 nF | 390 nF | 68 nF | 120 nF | 470 nF | 180 nF | 270 nF | 1.2 µF | 180 | |
| 8KV | 820 pF | 1.5 nF | 4.7 nF | 2.2 nF | 3.9 nF | 12 nF | 1.5 nF | 2.7 nF | 8.2 nF | 1.8 nF | 3.9 nF | 12 nF | 2.2 nF | 4.7 nF | 15 nF | 5.6 nF | 12 nF | 33 nF | 020 |
| | 1.5 nF | 3.9 nF | 12 nF | 3.9 nF | 10 nF | 27 nF | 2.7 nF | 6.8 nF | 22 nF | 3.9 nF | 8.2 nF | 27 nF | 4.7 nF | 10 nF | 33 nF | 12 nF | 27 nF | 82 nF | 040 |
| | 1.5 nF | 3.9 nF | 12 nF | 3.9 nF | 10 nF | 27 nF | 2.7 nF | 6.8 nF | 22 nF | 3.9 nF | 8.2 nF | 27 nF | 4.7 nF | 10 nF | 33 nF | 12 nF | 27 nF | 82 nF | 060 |
| | 3.3 nF | 6.8 nF | 22 nF | 8.2 nF | 18 nF | 56 nF | 5.6 nF | 12 nF | 39 nF | 8.2 nF | 18 nF | 56 nF | 10 nF | 22 nF | 68 nF | 22 nF | 56 nF | 180 nF | 100 |
| | 4.7 nF | 12 nF | 39 nF | 12 nF | 27 nF | 82 nF | 8.2 nF | 18 nF | 56 nF | 12 nF | 27 nF | 82 nF | 15 nF | 33 nF | 100 nF | 39 nF | 82 nF | 270 nF | 140 |
| 8.2 nF | 15 nF | 47 nF | 22 nF | 39 nF | 120 nF | 15 nF | 27 nF | 82 nF | 18 nF | 39 nF | 120 nF | 22 nF | 47 nF | 150 nF | 56 nF | 100 nF | 330 nF | 180 | |
| 10KV | 470 pF | 1.0 nF | 2.7 nF | 1.2 nF | 2.2 nF | 6.8 nF | 820 pF | 1.5 nF | 4.7 nF | 1.2 nF | 2.2 nF | 6.8 nF | 1.5 nF | 2.7 nF | 8.2 nF | 3.9 nF | 6.8 nF | 22 nF | 020 |
| | 1.2 nF | 2.2 nF | 5.6 nF | 2.7 nF | 5.6 nF | 15 nF | 1.8 nF | 3.9 nF | 10 nF | 2.7 nF | 5.6 nF | 15 nF | 3.3 nF | 6.8 nF | 18 nF | 8.2 nF | 15 nF | 47 nF | 040 |
| | 1.2 nF | 2.2 nF | 5.6 nF | 2.7 nF | 5.6 nF | 15 nF | 1.8 nF | 3.9 nF | 10 nF | 2.7 nF | 5.6 nF | 15 nF | 3.3 nF | 6.8 nF | 18 nF | 8.2 nF | 15 nF | 47 nF | 060 |
| | 2.2 nF | 3.9 nF | 18 nF | 5.6 nF | 10 nF | 47 nF | 3.9 nF | 6.8 nF | 33 nF | 5.6 nF | 10 nF | 47 nF | 6.8 nF | 12 nF | 56 nF | 18 nF | 33 nF | 120 nF | 100 |
| | 3.3 nF | 6.8 nF | 22 nF | 8.2 nF | 15 nF | 56 nF | 5.6 nF | 10 nF | 39 nF | 8.2 nF | 15 nF | 56 nF | 10 nF | 18 nF | 68 nF | 27 nF | 47 nF | 180 nF | 140 |
| 4.7 nF | 8.2 nF | 27 nF | 12 nF | 22 nF | 68 nF | 8.2 nF | 15 nF | 47 nF | 12 nF | 22 nF | 68 nF | 12 nF | 27 nF | 82 nF | 33 nF | 68 nF | 220 nF | 180 | |

STACKED CAPACITOR Vertical


NPO N2T X7R 25V-10KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Switch Mode Power Capacitor
- DC/DC Converter

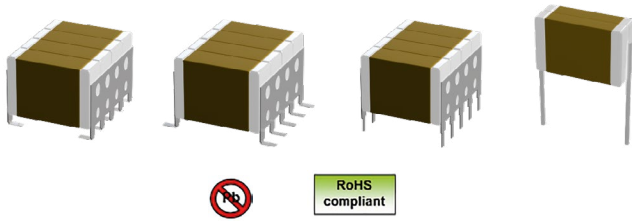

RoHS compliant

FEATURES

- Low ESR and ESL design
- Chips mounted vertically for better ESL
- 1210 with two Chips per row
- Available with 2 leads termination
- Competitors design equivalent

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

DISSIPATION FACTOR:
NPO/N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
 ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DILECTRIC STRENGTH TEST :
2.5U ≤ 200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

BURN IN :
Chips 24H+Stack 48H 125°C 2U U<500V | 1.5U 500≤U<1000 | 1.2U 1000≤U≤2000 | 1U U>2000


ORDERING INFORMATION

| SRTV | 2225 | Y | 102 | J | A | - | L | 2 | - | B | - |
|--------|--|---|--|--|--|----------------------------------|--|--------------|---|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | LEAD FRAME | FORM | LEADS | COATING | PACKAGING | SPECIAL |
| SRTV | 1210 1812 2220 2225 2825 3033 3640 4040 5550 6660 8060 | A = NPO P = N2T Y = X7R X = BX BY = 2C1 | Expressed in picofarads (pF). significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | X = 25V A = 50V B = 100V C = 200V E = 500V F = 630V G = 1000V O = 1500V H = 2000V I = 3000V L = 5000V 10 = 10000V | -- Tin Plated N = SnPb Plated | J L D T = 2 leads JP = plain J Lead | - 1 10 | - I = Conformal Coating H = Epoxy Coating | B = Reel V = Bulk | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

DIMENSIONS (IN MILLIMETERS)

| | 1210 | 1812 | 2220 | 2225 | 3033 | 3640 | 4040 | 5440 | 5550 | 6560 | 6080 | 8060 |
|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Lenght (L) | 3.80 ± 0.3 | 5.10 ± 0.4 | 6.20 ± 0.4 | 6.20 ± 0.4 | 8.20 ± 0.4 | 10.00 ± 0.4 | 10.80 ± 0.4 | 14.30 ± 0.4 | 14.60 ± 0.4 | 17.10 ± 0.4 | 15.80 ± 0.4 | 20.90 ± 0.4 |
| Width(W) 2 Leads | 5.80 -0+2.5 | | | | | | | | | | | |
| Width(W) 3 Leads | 5.80 -0+2.5 | 5.80 -0+2.5 | 5.80 -0+2.5 | 5.80 -0+2.5 | 5.80 -0+2.5 | 5.80 -0+2.5 | 5.80 -0+2.5 | | | | | |
| Width(W) 4 Leads | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 | 8.30 -0+2.5 |
| Width(W) 5 Leads | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 | 10.90 -0+2.5 |
| Width(W) 6 Leads | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 | 13.40 -0+2.5 |
| Width(W) 7 Leads | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 | 15.90 -0+2.5 |
| Width(W) 8 Leads | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 | 18.50 -0+2.5 |
| Width(W) 9 Leads | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 | 21.00 -0+2.5 |
| Width(W) 10 Leads | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 | 23.60 -0+2.5 |
| Width(W) 11 Leads | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 | 26.10 -0+2.5 |
| Height (H) | 5.30 ± 0.3 | 3.20 ± 0.4 | 5.10 ± 0.4 | 6.35 ± 0.4 | 8.40 ± 0.4 | 10.20 ± 0.4 | 10.20 ± 0.4 | 10.20 ± 0.4 | 12.70 ± 0.4 | 15.20 ± 0.4 | 20.30 ± 0.4 | 15.20 ± 0.4 |
| Height (T) | 6.60 ± 0.3 | 5.00 ± 0.4 | 6.90 ± 0.4 | 8.15 ± 0.4 | 10.20 ± 0.4 | 12.00 ± 0.4 | 12.00 ± 0.4 | 12.00 ± 0.4 | 14.50 ± 0.4 | 17.00 ± 0.4 | 22.10 ± 0.4 | 17.00 ± 0.4 |
| Lead Height (C) | 1.3 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 |
| lead Lenght (D) | 1.3 ± 0.3 | 1.4 ± 0.3 | 1.6 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 | 1.8 ± 0.3 |
| Lead Height (E) | 1.0 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 | 1.3 ± 0.3 |
| Lead Lenght (F) | 4.0 ± 1.0 | 4.0 ± 1.0 | 4.5 ± 1.0 | 5.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 | 6.0 ± 1.0 |

Number of leads represent the number individual legs of the lead frame.

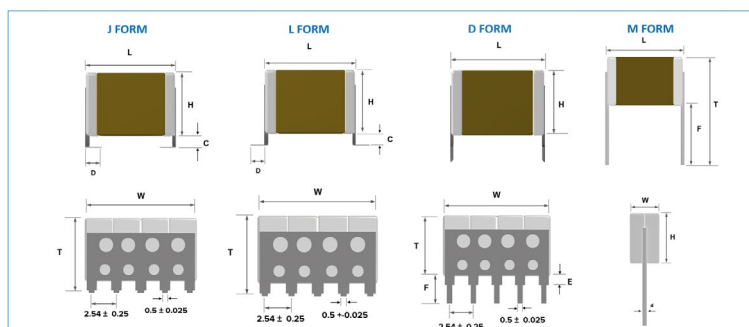

This document is subject to change without notice.

STACKED CAPACITOR Vertical

NPO N2T X7R 25V-10KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

QUICK REFERENCE DATA (Max capacitance in µF)

| | Leads | 1210 | | | 1812 | | | 2220 | | | 2225 | | | 3033 | | | 3740 | | | Leads |
|-------------|-------------|---------------|---------------|---------------|---------------|---------------|--------|---------------|---------------|---------------|--------------|--------|--------------|--------------|--------|--------|--------|--------|--------|--------|
| | | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | |
| min | | 820 pF | 1.2 nF | 6.8 nF | 1.8 nF | 3.3 nF | 18 nF | 3.9 nF | 6.8 nF | 39 nF | 4.7 nF | 8.2 nF | 56 nF | 8.2 nF | 15 nF | 100 nF | 12 nF | 22 nF | 150 nF | |
| 25V | 2 | <i>820 nF</i> | 270 nF | 39 µF | 220 nF | 390 nF | 22 µF | <i>470 nF</i> | 1.0 µF | <i>47 µF</i> | 270 nF | 1.0 µF | <i>10 µF</i> | 330 nF | 1.2 µF | 8.2 µF | 470 nF | 1.8 µF | 12 µF | 2 |
| | 3 | <i>820 nF</i> | 390 nF | <i>82 µF</i> | <i>390 nF</i> | 680 nF | 39 µF | <i>820 nF</i> | 1.5 µF | <i>82 µF</i> | 470 nF | 1.8 µF | <i>18 µF</i> | 680 nF | 2.7 µF | 15 µF | 680 nF | 2.7 µF | 18 µF | 3 |
| | 4 | <i>1.2 µF</i> | 560 nF | <i>120 µF</i> | <i>560 nF</i> | 1.0 µF | 56 µF | <i>1.2 µF</i> | 2.2 µF | <i>120 µF</i> | 680 nF | 2.7 µF | <i>27 µF</i> | 820 nF | 3.3 µF | 18 µF | 1.2 µF | 4.7 µF | 27 µF | 4 |
| | 5 | <i>1.5 µF</i> | 680 nF | <i>150 µF</i> | <i>820 nF</i> | 1.2 µF | 82 µF | <i>1.8 µF</i> | 2.7 µF | <i>180 µF</i> | 680 nF | 2.7 µF | <i>39 µF</i> | 1.0 µF | 3.9 µF | 22 µF | 1.2 µF | 5.6 µF | 33 µF | 5 |
| | 6 | <i>2.2 µF</i> | 820 nF | <i>220 µF</i> | <i>1.0 µF</i> | 1.5 µF | 100 µF | <i>2.2 µF</i> | 3.3 µF | <i>220 µF</i> | 1.0 µF | 3.9 µF | <i>47 µF</i> | 1.2 µF | 4.7 µF | 33 µF | 1.5 µF | 6.8 µF | 39 µF | 6 |
| | 7 | <i>2.2 µF</i> | 820 nF | <i>220 µF</i> | <i>1.2 µF</i> | 1.8 µF | 120 µF | <i>2.7 µF</i> | 3.9 µF | <i>270 µF</i> | 1.2 µF | 4.7 µF | <i>56 µF</i> | 1.5 µF | 5.6 µF | 33 µF | 1.8 µF | 6.8 µF | 47 µF | 7 |
| | 8 | <i>2.7 µF</i> | 1.0 µF | <i>270 µF</i> | <i>1.5 µF</i> | 2.2 µF | 150 µF | <i>2.7 µF</i> | 4.7 µF | <i>270 µF</i> | 1.2 µF | 4.7 µF | <i>68 µF</i> | 1.8 µF | 6.8 µF | 39 µF | 2.2 µF | 8.2 µF | 56 µF | 8 |
| | 9 | <i>3.3 µF</i> | 1.2 µF | <i>330 µF</i> | <i>1.5 µF</i> | 2.2 µF | 150 µF | <i>3.3 µF</i> | 5.6 µF | <i>330 µF</i> | 1.5 µF | 5.6 µF | <i>68 µF</i> | 1.8 µF | 6.8 µF | 47 µF | 2.7 µF | 10 µF | 56 µF | 9 |
| | 10 | <i>3.3 µF</i> | 1.2 µF | <i>330 µF</i> | <i>1.5 µF</i> | 2.7 µF | 150 µF | <i>3.3 µF</i> | 5.6 µF | <i>330 µF</i> | 1.5 µF | 5.6 µF | <i>68 µF</i> | 2.2 µF | 8.2 µF | 47 µF | 2.7 µF | 10 µF | 68 µF | 10 |
| | 50V | 2 | <i>560 nF</i> | 180 nF | 39 µF | 220 nF | 390 nF | 6.8 µF | <i>470 nF</i> | 1.0 µF | <i>47 µF</i> | 270 nF | 1.0 µF | <i>10 µF</i> | 330 nF | 1.2 µF | 8.2 µF | 470 nF | 1.8 µF | 12 µF |
| 3 | | <i>560 nF</i> | 330 nF | <i>82 µF</i> | <i>390 nF</i> | 680 nF | 12 µF | <i>820 nF</i> | 1.5 µF | <i>82 µF</i> | 470 nF | 1.8 µF | <i>18 µF</i> | 680 nF | 2.7 µF | 15 µF | 680 nF | 2.7 µF | 18 µF | 3 |
| 4 | | <i>820 nF</i> | 470 nF | <i>120 µF</i> | <i>560 nF</i> | 1.0 µF | 18 µF | <i>1.2 µF</i> | 2.2 µF | <i>120 µF</i> | 680 nF | 2.7 µF | <i>27 µF</i> | 820 nF | 3.3 µF | 18 µF | 1.2 µF | 4.7 µF | 27 µF | 4 |
| 5 | | <i>1.2 µF</i> | 560 nF | <i>150 µF</i> | <i>820 nF</i> | 1.2 µF | 27 µF | <i>1.8 µF</i> | 2.7 µF | <i>180 µF</i> | 680 nF | 2.7 µF | <i>39 µF</i> | 1.0 µF | 3.9 µF | 22 µF | 1.2 µF | 5.6 µF | 33 µF | 5 |
| 6 | | <i>1.5 µF</i> | 680 nF | <i>220 µF</i> | <i>1.0 µF</i> | 1.5 µF | 33 µF | <i>2.2 µF</i> | 3.3 µF | <i>220 µF</i> | 1.0 µF | 3.9 µF | <i>47 µF</i> | 1.2 µF | 4.7 µF | 33 µF | 1.5 µF | 6.8 µF | 39 µF | 6 |
| 7 | | <i>1.8 µF</i> | 820 nF | <i>220 µF</i> | <i>1.2 µF</i> | 1.8 µF | 39 µF | <i>2.7 µF</i> | 3.9 µF | <i>270 µF</i> | 1.2 µF | 4.7 µF | <i>56 µF</i> | 1.5 µF | 5.6 µF | 33 µF | 1.8 µF | 6.8 µF | 47 µF | 7 |
| 8 | | <i>1.8 µF</i> | 1.0 µF | <i>270 µF</i> | <i>1.5 µF</i> | 2.2 µF | 47 µF | <i>2.7 µF</i> | 4.7 µF | <i>270 µF</i> | 1.2 µF | 4.7 µF | <i>68 µF</i> | 1.8 µF | 6.8 µF | 39 µF | 2.2 µF | 8.2 µF | 56 µF | 8 |
| 9 | | <i>2.2 µF</i> | 1.0 µF | <i>330 µF</i> | <i>1.5 µF</i> | 2.2 µF | 47 µF | <i>3.3 µF</i> | 5.6 µF | <i>330 µF</i> | 1.5 µF | 5.6 µF | <i>68 µF</i> | 1.8 µF | 6.8 µF | 47 µF | 2.7 µF | 10 µF | 56 µF | 9 |
| 10 | | <i>2.2 µF</i> | 1.0 µF | <i>330 µF</i> | <i>1.5 µF</i> | 2.7 µF | 47 µF | <i>3.3 µF</i> | 5.6 µF | <i>330 µF</i> | 1.5 µF | 5.6 µF | <i>68 µF</i> | 2.2 µF | 8.2 µF | 47 µF | 2.7 µF | 10 µF | 68 µF | 10 |
| 100V | | 2 | <i>390 nF</i> | 180 nF | 18 µF | 150 nF | 390 nF | 4.7 µF | <i>330 nF</i> | 1.0 µF | <i>22 µF</i> | 270 nF | 1.0 µF | <i>10 µF</i> | 330 nF | 1.2 µF | 8.2 µF | 470 nF | 1.8 µF | 12 µF |
| | 3 | <i>390 nF</i> | 330 nF | 39 µF | 270 nF | 680 nF | 8.2 µF | <i>560 nF</i> | 1.5 µF | 39 µF | 470 nF | 1.8 µF | <i>18 µF</i> | 680 nF | 2.7 µF | 15 µF | 680 nF | 2.7 µF | 18 µF | 3 |
| | 4 | <i>560 nF</i> | 470 nF | 56 µF | 390 nF | 1.0 µF | 12 µF | <i>820 nF</i> | 2.2 µF | 56 µF | 680 nF | 2.7 µF | <i>27 µF</i> | 820 nF | 3.3 µF | 18 µF | 1.2 µF | 4.7 µF | 27 µF | 4 |
| | 5 | <i>680 nF</i> | 560 nF | 68 µF | 560 nF | 1.2 µF | 18 µF | <i>1.2 µF</i> | 2.7 µF | <i>82 µF</i> | 680 nF | 2.7 µF | <i>39 µF</i> | 1.0 µF | 3.9 µF | 22 µF | 1.2 µF | 5.6 µF | 33 µF | 5 |
| | 6 | <i>1.0 µF</i> | 680 nF | <i>100 µF</i> | <i>680 nF</i> | 1.5 µF | 22 µF | <i>1.5 µF</i> | 3.3 µF | <i>100 µF</i> | 1.0 µF | 3.9 µF | <i>47 µF</i> | 1.2 µF | 4.7 µF | 33 µF | 1.5 µF | 6.8 µF | 39 µF | 6 |
| | 7 | <i>1.2 µF</i> | 820 nF | <i>120 µF</i> | <i>820 nF</i> | 1.8 µF | 27 µF | <i>1.8 µF</i> | 3.9 µF | <i>120 µF</i> | 1.2 µF | 4.7 µF | <i>56 µF</i> | 1.5 µF | 5.6 µF | 33 µF | 1.8 µF | 6.8 µF | 47 µF | 7 |
| | 8 | <i>1.2 µF</i> | 1.0 µF | <i>120 µF</i> | <i>1.0 µF</i> | 2.2 µF | 27 µF | <i>2.2 µF</i> | 4.7 µF | <i>150 µF</i> | 1.2 µF | 4.7 µF | <i>68 µF</i> | 1.8 µF | 6.8 µF | 39 µF | 2.2 µF | 8.2 µF | 56 µF | 8 |
| | 9 | <i>1.5 µF</i> | 1.0 µF | <i>150 µF</i> | <i>1.2 µF</i> | 2.2 µF | 33 µF | <i>2.2 µF</i> | 5.6 µF | <i>150 µF</i> | 1.5 µF | 5.6 µF | <i>68 µF</i> | 1.8 µF | 6.8 µF | 47 µF | 2.7 µF | 10 µF | 56 µF | 9 |
| | 10 | <i>1.5 µF</i> | 1.2 µF | <i>150 µF</i> | <i>1.2 µF</i> | 2.2 µF | 33 µF | <i>2.2 µF</i> | 5.6 µF | <i>150 µF</i> | 1.5 µF | 5.6 µF | <i>68 µF</i> | 2.2 µF | 8.2 µF | 47 µF | 2.7 µF | 10 µF | 68 µF | 10 |
| | 200V | 2 | <i>180 nF</i> | 560 nF | 3.3 µF | <i>100 nF</i> | 560 nF | 3.3 µF | <i>150 nF</i> | 1.2 µF | 8.2 µF | 270 nF | 1.0 µF | 6.8 µF | 330 nF | 1.2 µF | 8.2 µF | 470 nF | 1.8 µF | 12 µF |
| 3 | | <i>180 nF</i> | 820 nF | 4.7 µF | <i>180 nF</i> | 820 nF | 4.7 µF | <i>270 nF</i> | 1.8 µF | 12 µF | 470 nF | 1.8 µF | 12 µF | 680 nF | 2.7 µF | 15 µF | 680 nF | 2.7 µF | 18 µF | 3 |
| 4 | | <i>270 nF</i> | 1.0 µF | 6.8 µF | <i>270 nF</i> | 1.0 µF | 6.8 µF | <i>390 nF</i> | 2.7 µF | 15 µF | 560 nF | 2.7 µF | 15 µF | 820 nF | 3.3 µF | 18 µF | 1.2 µF | 4.7 µF | 27 µF | 4 |
| 5 | | <i>330 nF</i> | 1.2 µF | 8.2 µF | <i>390 nF</i> | 1.2 µF | 8.2 µF | <i>560 nF</i> | 3.3 µF | 18 µF | 680 nF | 3.3 µF | 22 µF | 1.0 µF | 4.7 µF | 27 µF | 1.2 µF | 5.6 µF | 33 µF | 5 |
| 6 | | <i>470 nF</i> | 1.5 µF | 10 µF | <i>470 nF</i> | 1.5 µF | 10 µF | <i>680 nF</i> | 3.9 µF | 22 µF | 1.0 µF | 3.9 µF | 27 µF | 1.2 µF | 4.7 µF | 33 µF | 1.5 µF | 6.8 µF | 39 µF | 6 |
| 7 | | <i>560 nF</i> | 1.8 µF | 12 µF | <i>560 nF</i> | 1.8 µF | 12 µF | <i>820 nF</i> | 4.7 µF | 27 µF | 1.2 µF | 4.7 µF | 27 µF | 1.5 µF | 6.8 µF | 39 µF | 1.8 µF | 8.2 µF | 47 µF | 7 |
| 8 | | <i>560 nF</i> | 2.2 µF | 12 µF | <i>680 nF</i> | 2.2 µF | 15 µF | <i>1.0 µF</i> | 4.7 µF | 33 µF | 1.2 µF | 5.6 µF | 33 µF | 1.8 µF | 6.8 µF | 39 µF | 2.2 µF | 8.2 µF | 56 µF | 8 |
| 9 | | <i>680 nF</i> | 2.2 µF | 15 µF | <i>680 nF</i> | 2.2 µF | 15 µF | <i>1.2 µF</i> | 5.6 µF | 33 µF | 1.5 µF | 5.6 µF | 39 µF | 1.8 µF | 8.2 µF | 47 µF | 2.7 µF | 10 µF | 56 µF | 9 |
| 10 | | <i>680 nF</i> | 2.7 µF | 18 µF | <i>680 nF</i> | 2.7 µF | 18 µF | <i>1.2 µF</i> | 5.6 µF | 39 µF | 1.5 µF | 6.8 µF | 47 µF | 2.2 µF | 8.2 µF | 56 µF | 2.7 µF | 12 µF | 68 µF | 10 |
| 500V | | 2 | 82 nF | 150 nF | 680 nF | 100 nF | 180 nF | 680 nF | 220 nF | 390 nF | 1.5 µF | 270 nF | 470 nF | 2.2 µF | 330 nF | 820 nF | 3.9 µF | 470 nF | 1.2 µF | 5.6 µF |
| | 3 | 150 nF | 330 nF | 1.0 µF | 150 nF | 330 nF | 1.0 µF | 390 nF | 820 nF | 2.2 µF | 470 nF | 1.0 µF | 3.3 µF | 680 nF | 1.8 µF | 6.8 µF | 680 nF | 1.8 µF | 8.2 µF | 3 |
| | 4 | 220 nF | 390 nF | 1.8 µF | 180 nF | 390 nF | 1.8 µF | 390 nF | 1.0 µF | 3.9 µF | 560 nF | 1.2 µF | 4.7 µF | 820 nF | 2.2 µF | 8.2 µF | 1.2 µF | 3.3 µF | 12 µF | 4 |
| | 5 | 270 nF | 560 nF | 1.8 µF | 270 nF | 470 nF | 2.2 µF | 560 nF | 1.2 µF | 4.7 µF | 680 nF | 1.5 µF | 5.6 µF | 1.2 µF | 2.7 µF | 10 µF | 1.2 µF | 3.9 µF | 15 µF | 5 |
| | 6 | 270 nF | 680 nF | 2.2 µF | 330 nF | 680 nF | 2.2 µF | 680 nF | 1.5 µF | 5.6 µF | 820 nF | 1.8 µF | 6.8 µF | 1.2 µF | 3.3 µF | 12 µF | 1.2 µF | 4.7 µF | 18 µF | 6 |
| | 7 | 330 nF | 680 nF | 2.7 µF | 390 nF | 680 nF | 3.3 µF | 820 nF | 1.8 µF | 6.8 µF | 1.0 µF | 2.2 µF | 8.2 µF | 1.5 µF | 3.9 µF | 15 µF | 2.2 µF | 5.6 µF | 22 µF | 7 |
| | 8 | 390 nF | 820 nF | 3.3 µF | 390 nF | 820 nF | 3.3 µF | 1.0 µF | 2.2 µF | 8.2 µF | 1.2 µF | 2.7 µF | 10 µF | 1.8 µF | 3.9 µF | 18 µF | 2.2 µF | 6.8 µF | 27 µF | 8 |
| | 9 | 470 nF | 1.0 µF | 3.9 µF | 470 nF | 1.0 µF | 3.9 µF | 1.0 µF | 2.2 µF | 8.2 µF | 1.2 µF | 2.7 µF | 12 µF | 2.2 µF | 4.7 µF | 18 µF | 2.7 µF | 6.8 µF | 27 µF | 9 |
| | 10 | 560 nF | 1.0 µF | 4.7 µF | 560 nF | 1.0 µF | 3.9 µF | 1.2 µF | 2.2 µF | 10 µF | 1.5 µF | 3.3 µF | 12 µF | 2.2 µF | 5.6 µF | 22 µF | 2.7 µF | 8.2 µF | 33 µF | 10 |
| | 630V | 2 | 68 nF | 120 nF | 470 nF | 47 nF | 120 nF | 560 nF | 120 nF | 270 nF | 1.2 µF | 150 nF | 390 nF | 1.5 µF | 270 nF | 680 nF | 2.7 µF | 390 nF | 1.0 µF | 3.9 µF |
| 3 | | 100 nF | 180 nF | 820 nF | 100 nF | 180 nF | 820 nF | 220 nF | 470 nF | 1.8 µF | 270 nF | 560 nF | 2.2 µF | 470 nF | 1.0 µF | 3.9 µF | 560 nF | 1.5 µF | 5.6 µF | 3 |
| 4 | | 150 nF | 270 nF | 1.0 µF | 120 nF | 270 nF | 1.0 µF | 270 nF | 560 nF | 2.2 µF | 330 nF | 680 nF | 3.3 µF | 470 nF | 1.2 µF | 5.6 µF | 1.0 µF | 1.8 µF | 8.2 µF | 4 |
| 5 | | 150 nF | 330 nF | 1.2 µF | 180 nF | 330 nF | 1.2 µF | 390 nF | 680 nF | 3.3 µF | 470 nF | 1.0 µF | 3.9 µF | 820 nF | 1.8 µF | 6.8 µF | 1.2 µF | 2.7 µF | 10 µF | 5 |
| 6 | | 220 nF | 470 nF | 1.5 µF | 180 nF | 390 nF | 1.5 µF | 470 nF | 820 nF | 3.9 µF | 560 nF | 1.2 µF | 4.7 µF | 1.0 µF | 1.8 µF | 8.2 µF | 1.2 µF | 2.7 µF | 12 µF | 6 |
| 7 | | 220 nF | 470 nF | 1.8 µF</ | | | | | | | | | | | | | | | | |

STACKED CAPACITOR High Compact


10V - 2000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Smoothing signals
- Energy storage
- Converters, inverters

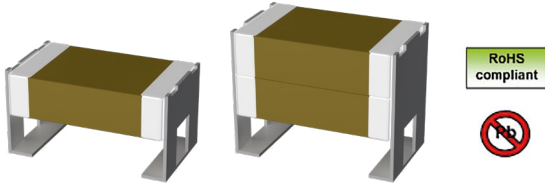

FEATURES

- Low ESR and ESL design
- Auto range based on AECQ -200 generic requirement
- Extended range based on commercial grade
- High Reliability Copper Beryllium Lead Frame
- Available in Tin or SnPb Plating

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :

NPO, X7R : - 55°C, + 125°C
X5R : - 55°C, + 85°C
Y5V : - 25°C, + 85°C

TEMPERATURE COEFFICIENT :

X7R : ± 15% with 0Vdc applied
X5R : ± 15% with 0Vdc applied
Y5V : +30% -80% with 0Vdc applied

DISSIPATION FACTOR :

NPO : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
 : ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 5% (10V), ≤ 3.5% (16V and 25V) and ≤ 2.5% (50V to 2000V)
X5R : ≤ 15% (6.3V), ≤ 10% (16V, 25V, 35V)
Y5V : ≤ 12.5% (16V)

INSULATION RESISTANCE (IR) :

25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :

2.5U U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

ORDERING INFORMATION

| SRH | D | 1210 | Y | 106 | K | Q | - | A | B | - |
|-------|---------------------------|----------------------|--|--|--|---|-----------------------------------|----------------------------|-----------|------------------------------|
| SERIE | CHIPS | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | LEAD FRAME | RANGE | PACKAGING | SPECIAL |
| SRH | S = 1 chip D = 2 chips | 1210 1812 2220 | A = NPO Y = X7R S = X5R V = Y5V | Expressed in picofarads (pF) The first two digits are significant, the third digit gives the number of noughts Example : 102 = 1 000pF | J = ± 5% (1 chip NPO) K = ± 10% (1 chip Class II/ 2 chips NPO) M = ± 20% (1 or 2 chips Class II) | Q = 10V J = 16 V X = 25 V A = 50 V U = 63 V B = 100 V P = 250 V E = 500 V F = 630 V G = 1000 V O = 1500 V H = 2000 V | - = Tin Plated N = SnPb Plated | A = AECQ E = Commercial | B = Reel | Dxx = Reliability parameters |


For any other size, voltage and tolerance please contact us.

DIMENSIONS J (In millimeters)

| 1 CHIP STACK | 1210 | 1812 | 2220 |
|--------------------|-------------|-------------|-------------|
| Length (L) | 3.50 ± 0.30 | 5.00 ± 0.45 | 6.00 ± 0.50 |
| Width (W) | 2.60 ± 0.30 | 3.5 ± 0.50 | 5.00 ± 0.50 |
| Max Height std (T) | 3.35 ± 0.10 | 2.90 ± 0.20 | 3.50 ± 0.30 |
| Max Height alt (T) | 3.20 ± 0.10 | 4.10 ± 0.20 | 4.10 ± 0.30 |
| Lead Width (D) | 0.80 ± 0.15 | 1.10 ± 0.30 | 1.60 ± 0.30 |

| 2 CHIPS STACK | 1210 | 1812 | 2220 |
|--------------------|-------------|-------------|-------------|
| Length (L) | 3.50 ± 0.30 | 5.00 ± 0.45 | 6.00 ± 0.50 |
| Width (W) | 2.60 ± 0.30 | 3.5 ± 0.50 | 5.00 ± 0.50 |
| Max Height std (T) | 6.15 ± 0.15 | 5.00 ± 0.5 | 5.00 ± 0.50 |
| Max Height alt (T) | 5.20 ± 0.15 | 7.20 ± 0.50 | 7.20 ± 0.50 |
| Lead Width (D) | 0.80 ± 0.15 | 1.10 ± 0.30 | 1.60 ± 0.30 |

Refere to Value Chart for Height std or Height alt

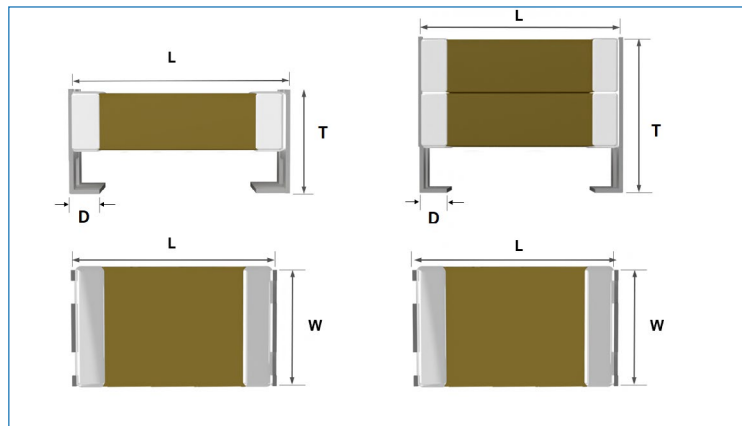

This document is subject to change without notice.

STACKED CAPACITOR High Compact

10V - 2000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

VALUES CHART

| SIZE | | | 1210 | | | | | | | 1812 | | | | | | | 2220 | | | | | | | | | | | | |
|--------------|-------|--------|--------|-------|-------|-------|-------|--------|--------|--------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|--------|--------|--------|--------|--|
| DIELECTRIC | | | X7R | | | | | | | X7R | | | | | | | X7R | | | | | | | | | | | | |
| MAX AUTO | | | 47 µF | 47 µF | 47 µF | 22 µF | 10 µF | 1.5 µF | 330 nF | 330 nF | 22 µF | 22 µF | 22 µF | 10 µF | 4.7 µF | 1.5 µF | 470 nF | 220 nF | 220 nF | 47 µF | 47 µF | 22 µF | 22 µF | 22 µF | 2.2 µF | 1.2 µF | 1.2 µF | 470 nF | |
| MAX NON AUTO | | | 100 µF | 47 µF | 47 µF | 22 µF | 10 µF | 1.5 µF | 330 nF | 330 nF | 22 µF | 68 µF | 22 µF | 22 µF | 10 µF | 2.2 µF | 1 µF | 470 nF | 220 nF | 100 µF | 100 µF | 47 µF | 22 µF | 22 µF | 4.7 µF | 2.2 µF | 2.2 µF | 470 nF | |
| Nb. chip | CODE | CAP | 10V | 16V | 25V | 50V | 100V | 250V | 500V | 630V | 10V | 16V | 25V | 50V | 100V | 250V | 500V | 630V | 1000V | 16V | 25V | 50V | 63V | 100V | 250V | 500V | 630V | 1000V | |
| 1 chip | 104 | 100 nF | | | | | | | A/E | A/E | | | | | | A/E | A/E | A/E | | | | | | | | | | | |
| | 154 | 150 nF | | | | | | | A/E | A/E | | | | | | | | | | | | | | | | | | | |
| | 224 | 220 nF | | | | | | | A/E | | | | | | | | A/E | E | | | | | | | | | | A/E | |
| | 334 | 330 nF | | | | | | | | | | | | | | | E | | | | | | | | | | | | |
| | 474 | 470 nF | | | | | | | A/E | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 564 | 560 nF | | | | | | | | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 684 | 680 nF | | | | | | | E | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 105 | 1.0 µF | | | | | | | | | | | | | | | E | | | | | | | | A/E | E | E | | |
| | 225 | 2.2 µF | | | | | | | A/E | | | | | | | | | | | | | | | | A/E | E | | | |
| | 475 | 4.7 µF | | | | | | | A/E | | | | | | A/E | E | | | | | | | | | A/E | | | | |
| | 565 | 5.6 µF | | | | | | | | A/E | | | | | | | | | | | | | | | | A/E | | | |
| | 685 | 6.8 µF | | | | | | | | A/E | | | | | | | | | | | | | | | | A/E | | | |
| | 825 | 8.2 µF | | | | | | | | A/E | | | | | | | | | | | | | | | | A/E | | | |
| | 106 | 10 µF | | A/E | A/E | A/E | A/E | A/E | | | | | | | | | | | | | | | | | A/E | A/E | A/E | A/E | |
| | 156 | 15 µF | | | | | | | | | | | | | | | | | | | | | | | | A/E | | | |
| 226 | 22 µF | | A/E | A/E | A/E | | | | | | | | | | | | | | | | | | | | A/E | | | | |
| 476 | 47 µF | | E | | | | | | | | | | | | | | | | | | | | | | E | E | | | |
| 2 chips | 225 | 220 nF | | | | | | | A/E | A/E | | | | | | | A/E | A/E | A/E | | | | | | | | | | |
| | 335 | 330 nF | | | | | | | A/E | A/E | | | | | | | | | | | | | | | | | | | |
| | 474 | 470 nF | | | | | | | A/E | | | | | | | | | | | | | | | | | | | A/E | |
| | 664 | 660 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 105 | 1.0 µF | | | | | | | A/E | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 125 | 1.2 µF | | | | | | | | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 155 | 1.5 µF | | | | | | | E | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 225 | 2.2 µF | | | | | | | | | | | | | | | | | | | | | | | | A/E | E | E | |
| | 475 | 4.7 µF | | | | | | | | | | | | | | | | | | | | | | | | A/E | | | |
| | 106 | 10 µF | | | | | | | A/E | A/E | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 166 | 15 µF | | | | | | | | A/E | A/E | A/E | | | | | | | | | | | | | | A/E | | | |
| | 226 | 22 µF | | A/E | A/E | A/E | A/E | | | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 336 | 33 µF | | | | | | | | | | | | | | | | | | | | | | | | | E | | |
| | 476 | 47 µF | | A/E | A/E | A/E | | | | | | | | | | | | | | | | | | | | A/E | A/E | A/E | |
| | 107 | 100 µF | | E | | | | | | | | | | | | | | | | | | | | | | E | E | | |

A : Auto generic range E : Commercial range White : Height std Black : Height alt

| SIZE | | | 1210 | | | | | | | 1812 | | | | | | | 2220 | | | | | | | | | | | |
|--------------|--------|--------|--------|--------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|-------|-------|--------|--------|--------|--------|--------|--------|--------|-------|-------|---|---|
| DIELECTRIC | | | NPO | | | | | | | NPO | | | | | | | NPO | | | | | | | | | | | |
| MAX AUTO | | | 200 nF | 200 nF | 94 nF | 66 nF | 66 nF | 44 nF | - | - | 300 nF | 200 nF | 200 nF | 94 nF | 94 nF | - | - | - | 940 nF | 440 nF | 300 nF | 200 nF | 300 nF | 300 nF | 66 nF | - | - | |
| MAX NON AUTO | | | 300 nF | 200 nF | 94 nF | 66 nF | 66 nF | 66 nF | 4.4 nF | 4.4 nF | 440 nF | 300 nF | 200 nF | 140 nF | 140 nF | 44 nF | 16 nF | 9.4 nF | 940 nF | 660 nF | 300 nF | 300 nF | 300 nF | 200 nF | 66 nF | 66 nF | | |
| Nb. chip | CODE | CAP | 50V | 100V | 250V | 500V | 630V | 1000V | 1500V | 2000V | 50V | 100V | 250V | 500V | 630V | 1000V | 1500V | 2000V | 50V | 100V | 250V | 500V | 630V | 1000V | 1500V | 2000V | | |
| 1 chip | 122 | 1.2 nF | | | | | | | | | | | | | | | | E | | | | | | | | | | |
| | 222 | 2.2 nF | | | | | | | | | | | | | | | | A/E | E | | | | | | | | | |
| | 103 | 10 nF | | | | | | | | | | | | | | | | A/E | | | | | | | | | | |
| | 223 | 22 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 333 | 33 nF | | | | | | | | | | | | | | | | | | | | | | | | A/E | E | E |
| | 473 | 47 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 683 | 68 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 104 | 100 nF | | A/E | A/E | | | | | | | | | | | | | | | | | | | | | | | |
| | 154 | 150 nF | | E | | | | | | | | | | | | | | | | | | | | | | | | |
| | 224 | 220 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 334 | 330 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 474 | 470 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 chips | 224 | 2.4 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 442 | 4.4 nF | | | | | | | | | | | | | | | | | | | | | | | | | E | |
| | 203 | 20 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 443 | 44 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 663 | 66 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 943 | 94 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 143 | 140 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 204 | 220 nF | | A/E | A/E | | | | | | | | | | | | | | | | | | | | | | | |
| | 304 | 300 nF | | E | | | | | | | | | | | | | | | | | | | | | | | | |
| | 444 | 440 nF | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 664 | 660 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 944 | 940 nF | | | | | | | | | | | | | | | | | | | | | | | | | | | |

A : Auto generic range E : Commercial range White : Height std Black : Height alt

This document is subject to change without notice.

| SIZE | | | 1210 | | | | 1812 |
|------------|------|--------|------|-----|-----|-----|------|
| DIELECTRIC | | | X5R | | | | Y5V |
| Nb chip | CODE | CAP | 6.3V | 16V | 25V | 35V | 16V |
| 1 chip | 106 | 10 µF | | | | E | |
| | 226 | 22 µF | | | | E | |
| | 476 | 47 µF | | E | E | | E |
| | 107 | 100 µF | | E | | | |
| | 227 | 220 µF | E | | | | |
| 2 chips | 226 | 22 µF | | | | E | |
| | 476 | 47 µF | | | | E | |
| | 107 | 100 µF | | E | E | | E |
| | 227 | 220 µF | | E | | | |
| | 477 | 470 µF | E | | | | |

A : Auto generic range **E** : Commercial range *White* : Height std *Black* : Height alt

Contact us for any other voltage, capacitance value, tolerance...


AECQ QUALITY STANDARD

Our components are all subject so strict internal qualifications. For this series, our auto generic range is based on AECQ standards. This means that our chips will meet the quality requirements defined by the AEC.


The Auto generic range of our high compact series are designed to meet the Automotive industry standard, but will not require submitting a SCD (Source Controlled Drawing). This series is therefore not AEC qualified, and will not be primarily addressed to Automotive customers. These quality standards include specific tests, such as : Shear test, board flex, environmental tests, and these stacks insure good performance and reliability.

TYPICAL CHARACTERISTICS

Board Flex Breaking

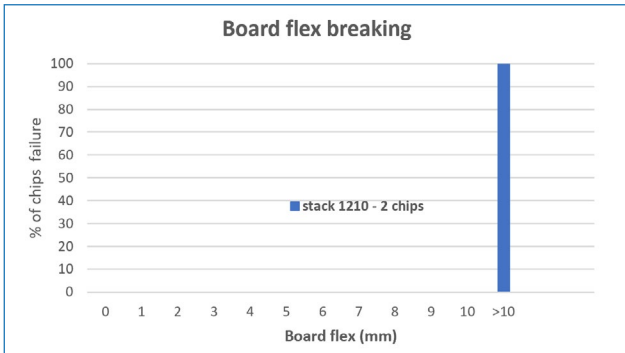

Shear test

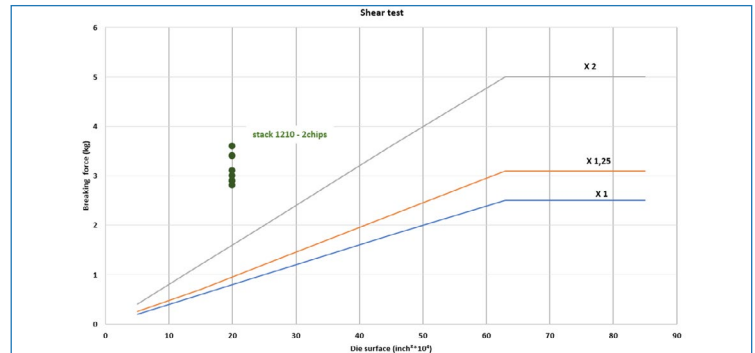

RADIAL CAPACITOR Dipped High Power

NPO N2T X7R 25V-1000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Severe environment
- Historical design



FEATURES

- Highly reliable design
- Epoxy coating option
- Available in NPO, N2T, BX, 2X1, X7R
- Non magnetic option
- Equivalence to most competitors design (cf file)

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

DISSIPATION FACTOR:
NPO/N2T: ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5Un U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

BURN IN :
Chips 24H+Stack 48H 125°C 2U U<500V | 1.5U 500≤U<1000 | 1.2U U=1000

ORDERING INFORMATION


| SRMC | 41 | Y | 102 | J | A | - | - | H | V | - |
|--------|----------|---|---|--|---|----------------------------|--------------------------------------|--|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | LEAD | COATING | PACKAGING | SPECIAL |
| SRMC | 31 to 96 | A = NPO P = N2T Y = X7R X = BX BY = 2C1 | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | B = ± 0.1pF C = ± 0,25pF D = ± 0,5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | X = 25V A = 50V B = 100V C = 200V E = 500V G = 1000V | - = Sn C = Non magnetic | - = Default A,C,D Form B = B Form | - = Conformal Coating H = Epoxy Coating | V = Bulk B = Ammo | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us

DIMENSIONS (in millimeters)

| SIZE | 31 | 32 | 38 | 40 | 41 | 43 | 44 | 45 | 47 | 48 | 49 | 52 | 54 | 58 |
|------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Lenght (L) max | 3.8 | 5.0 | 6.4 | 3.8 | 5.1 | 6.5 | 7.6 | 10.1 | 8.1 | 5.1 | 9.4 | 6.6 | 9.0 | 11.9 |
| Height A (W) max | 3.8 | 5.0 | 5.6 | 3.8 | - | 5.8 | 7.6 | 11.7 | 7.1 | - | 7.6 | - | 7.5 | 10.2 |
| Height B (W) max | 6.3 | 7.5 | 8.1 | 6.3 | 7.6 | 8.3 | 10.1 | 14.4 | 9.6 | 6.3 | 10.1 | 8.1 | 10.0 | 12.7 |
| Height C (W) max | - | 5.0 | 5.6 | - | - | - | 7.6 | 11.7 | 7.1 | - | - | - | - | - |
| Height D (W) max | - | - | - | 3.8 | 5.1 | - | - | - | - | 3.8 | - | 5.6 | - | - |
| Width (H) max | 2.5 | 3.2 | 5.0 | 2.5 | 3.2 | 3.8 | 4.5 | 4.5 | 5.0 | 4.0 | 5.0 | 4.0 | 4.0 | 5.0 |
| Lead spacing (LS) ±0.5 | 2.54 | 2.54 | 4.30 | 5.08 | 5.08 | 5.08 | 5.08 | 5.08 | 5.60 | 6.40 | 7.00 | 7.62 | 7.62 | 9.50 |
| Lead diameter (d) ±0.1 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 |
| Default Lead type | A | C | V | D | D | A | C | C | C | D | A | D | A | A |

| SIZE | 63 | 68 | 72 | 74 | 76 | 80 | 82 | 84 | 88 | 90 | 91 | 92 | 96 | 96 |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Lenght (L) max | 12.7 | 14.5 | 13.2 | 17.0 | 17.0 | 18.7 | 19.6 | 20.0 | 22.1 | 25.0 | 26.7 | 30.0 | 42.5 | 0.0 |
| Height A (W) max | 12.3 | 12.7 | - | 14.0 | 12.5 | 22.5 | 18.3 | 17.5 | 16.8 | 19.0 | 12.7 | 22.5 | 21.0 | 21.0 |
| Height B (W) max | 13.5 | 15.0 | 15.0 | 15.0 | 15.0 | 25.0 | 20.8 | 20.0 | 19.3 | 21.5 | 15.4 | 25.0 | 23.5 | 23.5 |
| Height C (W) max | - | - | - | - | - | 22.5 | 18.3 | - | - | - | - | - | - | - |
| Height D (W) max | - | 12.7 | 12.5 | - | - | 0.0 | - | - | - | - | - | - | - | - |
| Width (H) max | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| Lead spacing (LS) ±0.5 | 10.16 | 12.00 | 12.70 | 14.60 | 15.24 | 15.24 | 17.10 | 17.80 | 20.30 | 21.00 | 22.90 | 27.94 | 40.64 | 40.64 |
| Lead diameter (d) ±0.1 | 0.6 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 1.0 | 1.0 |
| Default Lead type | A | D | D | A | A | A | C | A | A | A | A | A | A | A |

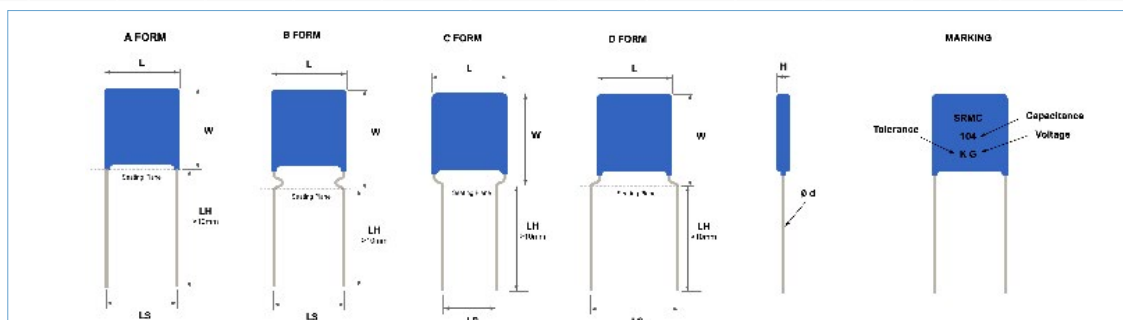

This document is subject to change without notice.

RADIAL CAPACITOR Dipped High Power

NPO N2T X7R 25V-1000V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

QUICK REFERENCE DATA (Max capacitance)

| | SRMC31 | | | SRMC32 | | | SRMC38 | | | SRMC40 | | | SRMC41 | | | SRMC43 | | | SRMC44 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 10 pF | 47 pF | 100 pF | 1.0 pF | 10 pF | 33 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 10 pF | 47 pF | 100 pF |
| 25V | 150 nF | 680 nF | 3.9 μF | 470 nF | 330 nF | 47 μF | 220 nF | 39 nF | 10 μF | 82 nF | 330 nF | 2.2 μF | 220 nF | 120 nF | 22 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 50V | 150 nF | 680 nF | 3.9 μF | 470 nF | 330 nF | 47 μF | 220 nF | 39 nF | 10 μF | 82 nF | 330 nF | 2.2 μF | 220 nF | 120 nF | 6.8 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 100V | 150 nF | 680 nF | 3.9 μF | 330 nF | 330 nF | 22 μF | 100 nF | 39 nF | 2.2 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 120 nF | 4.7 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 200V | 150 nF | 680 nF | 3.9 μF | 150 nF | 330 nF | 1.8 μF | 22 nF | 39 nF | 220 nF | 82 nF | 330 nF | 2.2 μF | 100 nF | 120 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 250V | 150 nF | 680 nF | 3.9 μF | 150 nF | 330 nF | 1.8 μF | 22 nF | 39 nF | 220 nF | 82 nF | 330 nF | 1.8 μF | 100 nF | 120 nF | 820 nF | 82 nF | 330 nF | 1.8 μF | 150 nF | 680 nF | 3.9 μF |
| 500V | 150 nF | 470 nF | 1.8 μF | 68 nF | 220 nF | 820 nF | 8.2 nF | 27 nF | 82 nF | 82 nF | 270 nF | 1.0 μF | 33 nF | 100 nF | 330 nF | 82 nF | 270 nF | 1.0 μF | 150 nF | 470 nF | 1.8 μF |
| 630V | 120 nF | 390 nF | 1.2 μF | 56 nF | 180 nF | 560 nF | 6.8 nF | 18 nF | 47 nF | 68 nF | 220 nF | 680 nF | 27 nF | 82 nF | 270 nF | 68 nF | 220 nF | 680 nF | 120 nF | 390 nF | 1.2 μF |
| 1000V | 82 nF | 270 nF | 820 nF | 39 nF | 120 nF | 330 nF | 2.7 nF | 8.2 nF | 15 nF | 39 nF | 120 nF | 390 nF | 15 nF | 47 nF | 120 nF | 39 nF | 120 nF | 390 nF | 82 nF | 270 nF | 820 nF |

| | SRMC45 | | | SRMC47 | | | SRMC48 | | | SRMC49 | | | SRMC52 | | | SRMC54 | | | SRMC58 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 10 pF | 47 pF | 100 pF | 1.0 pF | 10 pF | 33 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 10 pF | 47 pF | 100 pF |
| 25V | 150 nF | 680 nF | 3.9 μF | 470 nF | 330 nF | 47 μF | 220 nF | 39 nF | 10 μF | 82 nF | 330 nF | 2.2 μF | 220 nF | 120 nF | 22 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 50V | 150 nF | 680 nF | 3.9 μF | 470 nF | 330 nF | 47 μF | 220 nF | 39 nF | 10 μF | 82 nF | 330 nF | 2.2 μF | 220 nF | 120 nF | 6.8 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 100V | 150 nF | 680 nF | 3.9 μF | 330 nF | 330 nF | 22 μF | 100 nF | 39 nF | 2.2 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 120 nF | 4.7 μF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 200V | 150 nF | 680 nF | 3.9 μF | 150 nF | 330 nF | 1.8 μF | 22 nF | 39 nF | 220 nF | 82 nF | 330 nF | 2.2 μF | 100 nF | 120 nF | 820 nF | 82 nF | 330 nF | 2.2 μF | 150 nF | 680 nF | 3.9 μF |
| 250V | 150 nF | 680 nF | 3.9 μF | 150 nF | 330 nF | 1.8 μF | 22 nF | 39 nF | 220 nF | 82 nF | 330 nF | 1.8 μF | 100 nF | 120 nF | 820 nF | 82 nF | 330 nF | 1.8 μF | 150 nF | 680 nF | 3.9 μF |
| 500V | 150 nF | 470 nF | 1.8 μF | 68 nF | 220 nF | 820 nF | 8.2 nF | 27 nF | 82 nF | 82 nF | 270 nF | 1.0 μF | 33 nF | 100 nF | 330 nF | 82 nF | 270 nF | 1.0 μF | 150 nF | 470 nF | 1.8 μF |
| 630V | 120 nF | 390 nF | 1.2 μF | 56 nF | 180 nF | 560 nF | 6.8 nF | 18 nF | 47 nF | 68 nF | 220 nF | 680 nF | 27 nF | 82 nF | 270 nF | 68 nF | 220 nF | 680 nF | 120 nF | 390 nF | 1.2 μF |
| 1000V | 82 nF | 270 nF | 820 nF | 39 nF | 120 nF | 330 nF | 2.7 nF | 8.2 nF | 15 nF | 39 nF | 120 nF | 390 nF | 15 nF | 47 nF | 120 nF | 39 nF | 120 nF | 390 nF | 82 nF | 270 nF | 820 nF |

| | SRMC60 | | | SRMC63 | | | SRMC68 | | | SRMC72 | | | SRMC74 | | | SRMC76 | | | SRMC80 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 33 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 33 pF | 100 pF |
| 100V | 150 nF | 680 nF | 3.9 μF | 270 nF | 1.0 μF | 5.6 μF | 270 nF | 1.0 μF | 6.8 μF | 220 nF | 820 nF | 5.6 μF | 390 nF | 1.5 μF | 10 μF | 330 nF | 1.2 μF | 8.2 μF | 560 nF | 2.2 μF | 15 μF |
| 200V | 150 nF | 680 nF | 3.9 μF | 270 nF | 1.0 μF | 5.6 μF | 270 nF | 1.0 μF | 6.8 μF | 220 nF | 820 nF | 5.6 μF | 390 nF | 1.5 μF | 10 μF | 330 nF | 1.2 μF | 8.2 μF | 560 nF | 2.2 μF | 15 μF |
| 250V | 150 nF | 680 nF | 3.9 μF | 270 nF | 1.0 μF | 5.6 μF | 270 nF | 1.0 μF | 6.8 μF | 220 nF | 820 nF | 5.6 μF | 390 nF | 1.5 μF | 10 μF | 330 nF | 1.2 μF | 8.2 μF | 560 nF | 2.2 μF | 15 μF |
| 300V | 150 nF | 680 nF | 3.3 μF | 270 nF | 1.0 μF | 5.6 μF | 270 nF | 1.0 μF | 5.6 μF | 220 nF | 820 nF | 4.7 μF | 390 nF | 1.5 μF | 8.2 μF | 330 nF | 1.2 μF | 6.8 μF | 560 nF | 2.2 μF | 15 μF |
| 500V | 150 nF | 470 nF | 1.8 μF | 270 nF | 820 nF | 2.7 μF | 270 nF | 820 nF | 3.3 μF | 220 nF | 680 nF | 2.7 μF | 390 nF | 1.5 μF | 4.7 μF | 330 nF | 1.0 μF | 3.9 μF | 560 nF | 2.2 μF | 8.2 μF |
| 630V | 120 nF | 390 nF | 1.2 μF | 220 nF | 680 nF | 2.2 μF | 220 nF | 680 nF | 2.7 μF | 180 nF | 560 nF | 1.8 μF | 330 nF | 1.2 μF | 3.9 μF | 270 nF | 820 nF | 2.7 μF | 560 nF | 1.8 μF | 6.8 μF |
| 1000V | 82 nF | 270 nF | 820 nF | 120 nF | 390 nF | 1.2 μF | 150 nF | 470 nF | 1.5 μF | 120 nF | 390 nF | 1.2 μF | 220 nF | 680 nF | 2.2 μF | 180 nF | 560 nF | 1.8 μF | 390 nF | 1.2 μF | 3.9 μF |

| | SRMC82 | | | SRMC84 | | | SRMC88 | | | SRMC90 | | | SRMC91 | | | SRMC92 | | | SRMC96 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 10 pF | 33 pF | 100 pF | 10 pF | 33 pF | 100 pF | 10 pF | 33 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 33 pF | 100 pF | 22 pF | 68 pF | 180 pF | 22 pF | 68 pF | 180 pF |
| 100V | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 15 μF | 560 nF | 2.2 μF | 15 μF | 470 nF | 1.8 μF | 12 μF | 820 nF | 2.7 μF | 18 μF | 1.0 μF | 3.9 μF | 27 μF |
| 200V | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 15 μF | 560 nF | 2.2 μF | 15 μF | 470 nF | 1.8 μF | 12 μF | 820 nF | 2.7 μF | 18 μF | 1.0 μF | 3.9 μF | 27 μF |
| 250V | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 15 μF | 560 nF | 2.2 μF | 15 μF | 470 nF | 1.8 μF | 12 μF | 820 nF | 2.7 μF | 18 μF | 1.0 μF | 3.9 μF | 27 μF |
| 300V | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 15 μF | 560 nF | 2.2 μF | 15 μF | 470 nF | 1.8 μF | 12 μF | 820 nF | 2.7 μF | 18 μF | 1.0 μF | 3.9 μF | 27 μF |
| 500V | 560 nF | 1.8 μF | 6.8 μF | 560 nF | 1.8 μF | 6.8 μF | 560 nF | 2.2 μF | 8.2 μF | 560 nF | 2.2 μF | 8.2 μF | 470 nF | 1.8 μF | 6.8 μF | 820 nF | 2.7 μF | 12 μF | 1.0 μF | 3.9 μF | 18 μF |
| 630V | 470 nF | 1.5 μF | 5.6 μF | 470 nF | 1.5 μF | 5.6 μF | 560 nF | 1.8 μF | 5.6 μF | 560 nF | 1.8 μF | 6.8 μF | 470 nF | 1.5 μF | 4.7 μF | 820 nF | 2.7 μF | 8.2 μF | 1.0 μF | 3.9 μF | 12 μF |
| 1000V | 330 nF | 1.0 μF | 3.3 μF | 330 nF | 1.0 μF | 3.3 μF | 390 nF | 1.2 μF | 3.9 μF | 390 nF | 1.2 μF | 3.9 μF | 270 nF | 820 nF | 2.7 μF | 470 nF | 1.5 μF | 4.7 μF | 680 nF | 2.2 μF | 6.8 μF |

1) Max Values in italic obtained with BME parts

This document is subject to change without notice.

RADIAL CAPACITOR Dipped High Voltage

NPO N2T X7R 1KV-15KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Severe environment
- Historical design



FEATURES

- Highly reliable design
- Epoxy coating option
- Available in NPO, N2T, BX, 2X1, X7R
- Non magnetic option
- Equivalence to most concurrent design (cf file)
- Marking on larger components

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

DISSIPATION FACTOR:
NPO/N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
 ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz
2C1, BX : Q2,5% max

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
1.2Un for 5s with 50mA max charging current

BURN IN :
Chips 24H+Stack 48H 125°C 1.2U 1000≤U≤2000 | 1U U>2000

ORDERING INFORMATION


| SRMC | 41 | Y | 104 | K | G | - | - | H | V | - |
|--------|----------|---|---|--|--|----------------------------|---|--|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | LEAD | COATING | PACKAGING | SPECIAL |
| SRMC | 31 to 96 | A = NPO P = N2T X = BX Y = X7R BY = 2C1 | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | B = ± 0,1pF C = ± 0,25pF D = ± 0,5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | G = 1000V O = 1500V H = 2000V I = 3000V L = 5000V 6 = 6000V 8 = 8000V 10 = 10kV 12 = 12kV 15 = 15kV | - = Sn C = Non magnetic | - = Default A = A Form B = B Form C = C Form D = D Form | - = Conformal Coating H = Epoxy Coating | V = Bulk B = Ammo | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us

DIMENSIONS (in millimeters)

| SIZE | 31 | 32 | 38 | 40 | 41 | 43 | 44 | 45 | 47 | 48 | 49 | 52 | 54 | 58 |
|------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Lenght (L) max | 3.8 | 5.0 | 6.4 | 3.8 | 5.1 | 6.5 | 7.6 | 10.1 | 8.1 | 5.1 | 9.4 | 6.6 | 9.0 | 11.9 |
| Height A (W) max | 3.8 | 5.0 | 5.6 | 3.8 | - | 5.8 | 7.6 | 11.7 | 7.1 | - | 7.6 | - | 7.5 | 10.2 |
| Height B (W) max | 6.3 | 7.5 | 8.1 | 6.3 | 7.6 | 8.3 | 10.1 | 14.4 | 9.6 | 6.3 | 10.1 | 8.1 | 10.0 | 12.7 |
| Height C (W) max | - | 5.0 | 5.6 | - | - | - | 7.6 | 11.7 | 7.1 | - | - | - | - | - |
| Height D (W) max | - | - | - | 3.8 | 5.1 | - | - | - | - | 3.8 | - | 5.6 | - | - |
| Width (H) max | 2.5 | 3.2 | 5.0 | 2.5 | 3.2 | 3.8 | 4.5 | 4.5 | 5.0 | 4.0 | 5.0 | 4.0 | 4.0 | 5.0 |
| Lead spacing (LS) ±0.5 | 2.54 | 2.54 | 4.30 | 5.08 | 5.08 | 5.08 | 5.08 | 5.08 | 5.60 | 6.40 | 7.00 | 7.62 | 7.62 | 9.50 |
| Lead diameter (d) ±0.1 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 |
| Default Lead type | A | C | V | D | D | A | C | C | C | D | A | D | A | A |

| SIZE | 63 | 68 | 72 | 74 | 76 | 80 | 82 | 84 | 88 | 90 | 91 | 92 | 96 | 96 |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Lenght (L) max | 12.7 | 14.5 | 13.2 | 17.0 | 17.0 | 18.7 | 19.6 | 20.0 | 22.1 | 25.0 | 26.7 | 30.0 | 42.5 | 0.0 |
| Height A (W) max | 12.3 | 12.7 | - | 14.0 | 12.5 | 22.5 | 18.3 | 17.5 | 16.8 | 19.0 | 12.7 | 22.5 | 21.0 | 21.0 |
| Height B (W) max | 13.5 | 15.0 | 15.0 | 15.0 | 15.0 | 25.0 | 20.8 | 20.0 | 19.3 | 21.5 | 15.4 | 25.0 | 23.5 | 23.5 |
| Height C (W) max | - | - | - | - | - | 22.5 | 18.3 | - | - | - | - | - | - | - |
| Height D (W) max | - | 12.7 | 12.5 | - | - | 0.0 | - | - | - | - | - | - | - | - |
| Width (H) max | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| Lead spacing (LS) ±0.5 | 10.16 | 12.00 | 12.70 | 14.60 | 15.24 | 15.24 | 17.10 | 17.80 | 20.30 | 21.00 | 22.90 | 27.94 | 40.64 | 40.64 |
| Lead diameter (d) ±0.1 | 0.6 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 1.0 | 1.0 |
| Default Lead type | A | D | D | A | A | A | C | A | A | A | A | A | A | A |

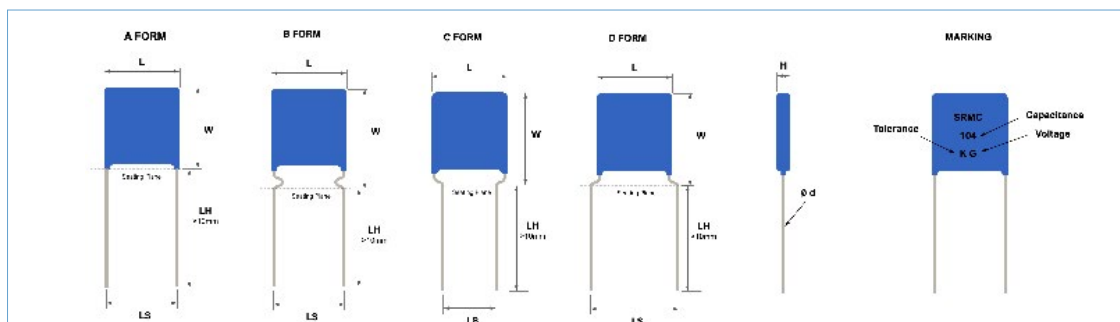

This document is subject to change without notice.



QUICK REFERENCE DATA (Max capacitance)

| | SRMC31 | | | SRMC32 | | | SRMC38 | | | SRMC40 | | | SRMC41 | | | SRMC43/59 | | | SRMC44 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 0.1 pF | 1.0 pF | 6.8 pF | 0.4 pF | 4.7 pF | 10 pF | 0.4 pF | 4.7 pF | 10 pF | 0.1 pF | 1.0 pF | 6.8 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF |
| 1KV | 820 pF | 2.2 nF | 5.6 nF | 6.8 nF | 22 nF | 47 nF | 6.8 nF | 22 nF | 47 nF | 820 pF | 2.2 nF | 5.6 nF | 6.8 nF | 22 nF | 47 nF | 15 nF | 47 nF | 120 nF | 39 nF | 120 nF | 330 nF |
| 1,5KV | 330 pF | 820 pF | 1.8 nF | 2.7 nF | 6.8 nF | 15 nF | 2.7 nF | 6.8 nF | 15 nF | 330 pF | 820 pF | 1.8 nF | 2.7 nF | 6.8 nF | 15 nF | 8.2 nF | 22 nF | 39 nF | 18 nF | 56 nF | 100 nF |
| 2KV | 150 pF | 390 pF | 820 pF | 1.5 nF | 3.3 nF | 8.2 nF | 1.5 nF | 3.3 nF | 8.2 nF | 150 pF | 390 pF | 820 pF | 1.5 nF | 3.3 nF | 8.2 nF | 3.9 nF | 8.2 nF | 22 nF | 12 nF | 22 nF | 68 nF |
| 2,5KV | | | | 820 pF | 1.8 nF | 4.7 nF | 820 pF | 1.8 nF | 4.7 nF | | | | 820 pF | 1.8 nF | 4.7 nF | 2.2 nF | 5.6 nF | 12 nF | 6.8 nF | 12 nF | 39 nF |
| 3KV | | | | 470 pF | 1.2 nF | 2.7 nF | 470 pF | 1.2 nF | 2.7 nF | | | | 470 pF | 1.2 nF | 2.7 nF | 1.2 nF | 3.3 nF | 8.2 nF | 2.7 nF | 10 nF | 27 nF |
| 4KV | | | | 220 pF | 680 pF | 1.5 nF | 220 pF | 680 pF | 1.5 nF | | | | 220 pF | 680 pF | 1.5 nF | 680 pF | 1.8 nF | 4.7 nF | 1.8 nF | 4.7 nF | 15 nF |
| 5KV | | | | | | | | | | | | | | | | 390 pF | 1.2 nF | 2.7 nF | 1.2 nF | 3.3 nF | 8.2 nF |
| 6KV | | | | | | | | | | | | | | | | 270 pF | 820 pF | 1.8 nF | 680 pF | 2.2 nF | 5.6 nF |
| 8KV | | | | | | | | | | | | | | | | 150 pF | 390 pF | 1.0 nF | 330 pF | 1.2 nF | 2.7 nF |
| 10KV | | | | | | | | | | | | | | | | 82 pF | 220 pF | | 270 pF | 680 pF | 1.2 nF |

| | SRMC45 | | | SRMC47 | | | SRMC48 | | | SRMC49 | | | SRMC52 | | | SRMC54 | | | SRMC58 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 10 pF | 47 pF | 100 pF | 1.0 pF | 10 pF | 33 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 10 pF | 47 pF | 100 pF |
| 1KV | 82 nF | 270 nF | 820 nF | 39 nF | 120 nF | 330 nF | 2.7 nF | 8.2 nF | 15 nF | 39 nF | 120 nF | 390 nF | 15 nF | 47 nF | 120 nF | 39 nF | 120 nF | 390 nF | 82 nF | 270 nF | 820 nF |
| 1,5KV | 47 nF | 120 nF | 220 nF | 18 nF | 56 nF | 100 nF | 1.0 nF | 2.7 nF | 5.6 nF | 22 nF | 68 nF | 120 nF | 8.2 nF | 22 nF | 39 nF | 22 nF | 68 nF | 120 nF | 47 nF | 120 nF | 220 nF |
| 2KV | 27 nF | 56 nF | 180 nF | 12 nF | 22 nF | 68 nF | 560 pF | 1.2 nF | 2.7 nF | 15 nF | 27 nF | 82 nF | 3.9 nF | 8.2 nF | 22 nF | 15 nF | 27 nF | 82 nF | 27 nF | 56 nF | 180 nF |
| 2,5KV | 15 nF | 33 nF | 100 nF | 6.8 nF | 12 nF | 39 nF | 270 pF | 680 pF | 1.5 nF | 8.2 nF | 15 nF | 47 nF | 2.2 nF | 5.6 nF | 12 nF | 8.2 nF | 15 nF | 47 nF | 15 nF | 33 nF | 100 nF |
| 3KV | 6.8 nF | 27 nF | 56 nF | 2.7 nF | 10 nF | 27 nF | 180 pF | 470 pF | 1.0 nF | 3.3 nF | 12 nF | 27 nF | 1.2 nF | 3.3 nF | 8.2 nF | 3.3 nF | 12 nF | 27 nF | 6.8 nF | 27 nF | 56 nF |
| 4KV | 4.7 nF | 12 nF | 39 nF | 1.8 nF | 4.7 nF | 15 nF | 82 pF | 220 pF | 470 pF | 2.2 nF | 5.6 nF | 18 nF | 680 pF | 1.8 nF | 4.7 nF | 2.2 nF | 5.6 nF | 18 nF | 4.7 nF | 12 nF | 39 nF |
| 5KV | 3.3 nF | 8.2 nF | 22 nF | 1.2 nF | 3.3 nF | 8.2 nF | | | | 1.5 nF | 3.9 nF | 10 nF | 390 pF | 1.2 nF | 2.7 nF | 1.5 nF | 3.9 nF | 10 nF | 3.3 nF | 8.2 nF | 22 nF |
| 6KV | 1.8 nF | 5.6 nF | 12 nF | 680 pF | 2.2 nF | 5.6 nF | | | | 820 pF | 2.7 nF | 6.8 nF | 270 pF | 820 pF | 1.8 nF | 820 pF | 2.7 nF | 6.8 nF | 1.8 nF | 5.6 nF | 12 nF |
| 8KV | 820 pF | 2.7 nF | 6.8 nF | 330 pF | 1.2 nF | 2.7 nF | | | | 390 pF | 1.5 nF | 3.3 nF | 150 pF | 390 pF | 1.0 nF | 390 pF | 1.5 nF | 3.3 nF | 820 pF | 2.7 nF | 6.8 nF |
| 10KV | 560 pF | 1.8 nF | 3.3 nF | 270 pF | 680 pF | 1.2 nF | | | | 270 pF | 820 pF | 1.5 nF | 82 pF | 220 pF | | 270 pF | 820 pF | 1.5 nF | 560 pF | 1.8 nF | 3.3 nF |
| 12KV | 390 pF | 1.2 nF | 2.2 nF | | | | | | | | | | | | | | | | 390 pF | 1.2 nF | 2.2 nF |

| | SRMC60 | | | SRMC63 | | | SRMC68 | | | SRMC72 | | | SRMC74 | | | SRMC76 | | | SRMC80 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 33 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 33 pF | 100 pF |
| 1KV | 82 nF | 270 nF | 820 nF | 120 nF | 390 nF | 1.2 μF | 150 nF | 470 nF | 1.5 μF | 120 nF | 390 nF | 1.2 μF | 220 nF | 680 nF | 2.2 μF | 180 nF | 560 nF | 1.8 μF | 390 nF | 1.2 μF | 3.9 μF |
| 1,5KV | 47 nF | 120 nF | 220 nF | 68 nF | 220 nF | 390 nF | 82 nF | 270 nF | 390 nF | 68 nF | 180 nF | 330 nF | 120 nF | 390 nF | 680 nF | 100 nF | 270 nF | 560 nF | 220 nF | 680 nF | 1.2 μF |
| 2KV | 27 nF | 56 nF | 180 nF | 47 nF | 82 nF | 180 nF | 47 nF | 100 nF | 330 nF | 39 nF | 82 nF | 270 nF | 82 nF | 150 nF | 470 nF | 56 nF | 120 nF | 390 nF | 120 nF | 270 nF | 820 nF |
| 2,5KV | 15 nF | 33 nF | 100 nF | 27 nF | 56 nF | 180 nF | 27 nF | 56 nF | 180 nF | 22 nF | 47 nF | 150 nF | 47 nF | 100 nF | 270 nF | 33 nF | 68 nF | 220 nF | 82 nF | 150 nF | 560 nF |
| 3KV | 6.8 nF | 27 nF | 56 nF | 12 nF | 39 nF | 100 nF | 12 nF | 47 nF | 120 nF | 10 nF | 39 nF | 82 nF | 18 nF | 68 nF | 180 nF | 15 nF | 56 nF | 120 nF | 33 nF | 120 nF | 270 nF |
| 4KV | 4.7 nF | 12 nF | 39 nF | 8.2 nF | 18 nF | 56 nF | 8.2 nF | 22 nF | 68 nF | 6.8 nF | 18 nF | 56 nF | 12 nF | 33 nF | 100 nF | 10 nF | 27 nF | 82 nF | 22 nF | 56 nF | 180 nF |
| 5KV | 3.3 nF | 8.2 nF | 22 nF | 5.6 nF | 12 nF | 33 nF | 5.6 nF | 15 nF | 39 nF | 4.7 nF | 12 nF | 33 nF | 8.2 nF | 22 nF | 56 nF | 6.8 nF | 18 nF | 47 nF | 15 nF | 39 nF | 100 nF |
| 8KV | 820 pF | 2.7 nF | 6.8 nF | 1.5 nF | 4.7 nF | 12 nF | 1.5 nF | 5.6 nF | 12 nF | 1.2 nF | 4.7 nF | 10 nF | 2.2 nF | 8.2 nF | 18 nF | 1.8 nF | 6.8 nF | 15 nF | 3.9 nF | 15 nF | 33 nF |
| 10KV | 560 pF | 1.8 nF | 3.3 nF | 1.0 nF | 2.7 nF | 5.6 nF | 1.2 nF | 3.3 nF | 5.6 nF | 820 pF | 2.7 nF | 4.7 nF | 1.8 nF | 4.7 nF | 10 nF | 1.2 nF | 3.9 nF | 6.8 nF | 2.7 nF | 8.2 nF | 15 nF |
| 12KV | 390 pF | 1.2 nF | 2.2 nF | 680 pF | 1.8 nF | 3.9 nF | 680 pF | 2.2 nF | 4.7 nF | 560 pF | 1.8 nF | 3.3 nF | 1.0 nF | 3.3 nF | 6.8 nF | 820 pF | 2.7 nF | 5.6 nF | 1.8 nF | 5.6 nF | 12 nF |
| 15KV | | | | 390 pF | 1.2 nF | | 470 pF | 1.2 nF | | 330 pF | 1.0 nF | | 680 pF | 1.8 nF | | 560 pF | 1.5 nF | | 1.2 nF | 3.3 nF | |

| | SRMC82 | | | SRMC84 | | | SRMC88 | | | SRMC81/90 | | | SRMC91 | | | SRMC92 | | | SRMC96 | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| min | 10 pF | 33 pF | 100 pF | 10 pF | 33 pF | 100 pF | 10 pF | 33 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 33 pF | 100 pF | 22 pF | 68 pF | 180 pF | 22 pF | 68 pF | 180 pF |
| 1KV | 330 nF | 1.0 μF | 3.3 μF | 330 nF | 1.0 μF | 3.3 μF | 390 nF | 1.2 μF | 3.9 μF | 390 nF | 1.2 μF | 3.9 μF | 270 nF | 820 nF | 2.7 μF | 470 nF | 1.5 μF | 4.7 μF | 680 nF | 2.2 μF | 6.8 μF |
| 1,5KV | 180 nF | 560 nF | 1.0 μF | 180 nF | 560 nF | 1.0 μF | 220 nF | 560 nF | 1.0 μF | 220 nF | 680 nF | 1.2 μF | 150 nF | 470 nF | 820 nF | 270 nF | 820 nF | 1.5 μF | 390 nF | 1.2 μF | 2.2 μF |
| 2KV | 100 nF | 220 nF | 680 nF | 100 nF | 220 nF | 680 nF | 120 nF | 220 nF | 820 nF | 120 nF | 270 nF | 820 nF | 100 nF | 180 nF | 680 nF | 180 nF | 330 nF | 1.0 μF | 270 nF | 470 nF | 1.5 μF |
| 2,5KV | 56 nF | 120 nF | 390 nF | 56 nF | 120 nF | 390 nF | 68 nF | 150 nF | 470 nF | 82 nF | 150 nF | 560 nF | 56 nF | 120 nF | 390 nF | 100 nF | 220 nF | 680 nF | 150 nF | 330 nF | 1.0 μF |
| 3KV | 27 nF | 100 nF | 220 nF | 27 nF | 100 nF | 220 nF | 33 nF | 120 nF | 270 nF | 33 nF | 120 nF | 270 nF | 27 nF | 100 nF | 220 nF | 47 nF | 180 nF | 390 nF | 68 nF | 270 nF | 560 nF |
| 4KV | 18 nF | 47 nF | 150 nF | 18 nF | 47 nF | 150 nF | 22 nF | 56 nF | 150 nF | 22 nF | 56 nF | 180 nF | 18 nF | 47 nF | 120 nF | 27 nF | 82 nF | 220 nF | 47 nF | 120 nF | 330 nF |
| 5KV | 12 nF | 33 nF | 82 nF | 12 nF | 33 nF | 82 nF | 15 nF | 39 nF | 100 nF | 15 nF | 39 nF | 100 nF | 12 nF | 27 nF | 82 nF | 22 nF | 56 nF | 120 nF | 33 nF | 82 nF | 220 nF |
| 8KV | 3.3 nF | 12 nF | 27 nF | 3.3 nF | 12 nF | 27 nF | 3.9 nF | 12 nF | 33 nF | 3.9 nF | 15 nF | 33 nF | 3.3 nF | 10 nF | 27 nF | 5.6 nF | 18 nF | 47 nF | 8.2 nF | 27 nF | 68 nF |
| 10KV | 2.2 nF | 6.8 nF | 12 nF | 2.2 nF | 6.8 nF | 12 nF | 2.7 nF | 8.2 nF | 15 nF | 2.7 nF | 8.2 nF | 15 nF | 2.2 nF | 6.8 nF | 12 nF | 3.9 nF | 12 nF | 22 nF | 5.6 nF | 15 nF | 33 nF |
| 12KV | 1.5 nF | 4.7 nF | 10 nF | 1.5 nF | 4.7 nF | 10 nF | 1.8 nF | 5.6 nF | 10 nF | 1.8 nF | 5.6 nF | 12 nF | 1.5 nF | 3.9 nF | 8.2 nF | 2.2 nF | 6.8 nF | 15 nF | 3.9 nF | 10 nF | 22 nF |
| 15KV | 1.0 nF | 2.7 nF | | 1.0 nF | 2.7 nF | | 1.0 nF | 3.3 nF | | 1.2 nF | 3.3 nF | | 820 pF | 2.7 nF | | 1.5 nF | 4.7 nF | | 2.2 nF | 6.8 nF | |

This document is subject to change without notice.

RADIAL CAPACITOR Encapsulated


NPO N2T X7R 25V-15KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Severe environment
- Historical design



RoHS
compliant

FEATURES

- Leded radial MLCC capacitor
- Epoxy molded
- High reliability, 100% burn in
- Available in NPO, N2T, BX, 2X1, X7R
- Equivalent to wide range of competitors design
- Custom voltage, package size, capacitance value on request
- Tested in accordance to CECC 32100 and AEC-Q200
- NPO version CECC 30600 et NFC 83-131 compliant
- X7R version CECC 30700 et NFC 83-132 compliant
- 2C1 version NF 83-132 compliant
- High Reliability option : 168 hours burn in
- Laser marked

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :

X7R, N2T : - 55°C, + 125°C
NPO : - 55°C, + 125°C

TEMPERATURE COEFFICIENT :

NPO : ± 30ppm
N2T : -2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

DISSIPATION FACTOR:

NPO/N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :

25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :

2.5U U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

BURN IN :

Chips 24H+Stack 48H 125°C 2U U<500V | 1.5U 500≤U<1000 | 1.2U
1000≤U≤2000 | 1U U>2000

ORDERING INFORMATION


| SR | 41 | Y | 102 | J | A | - | V | XX |
|--------|----------------|---|---|---|---|----------------------------|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | TERMINATION | PACKAGING | SPECIAL |
| SR | 41 to 94 | A = NPO P = N2T X = BX Y = X7R BY=2C1 | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 134OR0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0,25pF D = ± 0,5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | X = 25 V A = 50 V U = 63 V B = 100 V C = 200 V P = 250 V E = 500 V F = 630 V G = 1 KV H = 2 KV I = 3 KV K = 4 KV L = 5 KV 6 = 6 KV 8 = 8 KV 10 = 10 KV 15 = 15 KV | - : Sn C = Non magnetic | V = Bulk T = Tray | - BM = BME Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us

DIMENSIONS (in millimeters)

| SIZE | SR41 | SR43 | SR45 | SR47 | SR50 | SR60 | SR64 | SR65 |
|------------------------|------|------|------|------|------|------|------|------|
| Length (L) max | 4.0 | 5.0 | 7.5 | 4.0 | 5.0 | 7.5 | 10.0 | 10.5 |
| Height (W) max | 4.5 | 5.0 | 7.5 | 4.5 | 5.0 | 7.5 | 11.0 | 9.0 |
| Width (T) max | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 3.5 | 6.5 |
| Lead spacing (LS) ±0.5 | 2.54 | 2.54 | 4.32 | 5.08 | 5.08 | 5.08 | 5.08 | 7.62 |
| Lead diameter (d) ±0.1 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 |

| SIZE | SR68 | SR70 | SR74 | SR78 | SR82 | SR86 | SR90 | SR94 |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Length (L) max | 13.0 | 13.0 | 18.4 | 18.0 | 20.0 | 28.5 | 31.0 | 45.0 |
| Height (W) max | 12.0 | 12.0 | 12.7 | 16.0 | 19.0 | 19.0 | 24.0 | 23.0 |
| Width (T) max | 3.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| Lead spacing (LS) ±0.5 | 10.16 | 10.16 | 12.20 | 15.24 | 17.80 | 19.80 | 27.90 | 40.60 |
| Lead diameter (d) ±0.1 | 0.8 | 0.8 | 0.8 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |

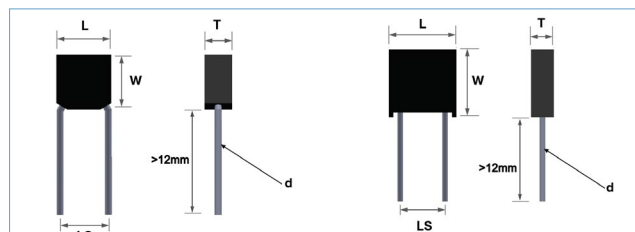

This document is subject to change without notice.

RADIAL CAPACITOR Encapsulated

NPO N2T X7R 25V-15KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

QUICK REFERENCE DATA (Max capacitance)

| | SR41 | | | SR43 | | | SR45 | | | SR47 | | |
|-------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | =Datas Radi- | 0.3 pF | 2.2 pF | 0.4 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 0.1 pF | 0.3 pF | 2.2 pF |
| 25V | 15 nF | 5.6 nF | 39 nF | 220 nF | 56 nF | 390 nF | 470 nF | 270 nF | 2.2 μF | 15 nF | 5.6 nF | 39 nF |
| 50V | 10 nF | 5.6 nF | 39 nF | 150 nF | 56 nF | 390 nF | 470 nF | 270 nF | 2.2 μF | 10 nF | 5.6 nF | 39 nF |
| 100V | 10 nF | 5.6 nF | 39 nF | 100 nF | 56 nF | 390 nF | 330 nF | 270 nF | 2.2 μF | 10 nF | 5.6 nF | 39 nF |
| 200V | 2.2 nF | 4.7 nF | 33 nF | 47 nF | 56 nF | 390 nF | 220 nF | 270 nF | 2.2 μF | 2.2 nF | 4.7 nF | 33 nF |
| 500V | 560 pF | 1.8 nF | 4.7 nF | 10 nF | 33 nF | 100 nF | 56 nF | 150 nF | 470 nF | 560 pF | 1.8 nF | 4.7 nF |
| 630V | 330 pF | 1.0 nF | 2.7 nF | 6.8 nF | 18 nF | 56 nF | 33 nF | 100 nF | 270 nF | 330 pF | 1.0 nF | 2.7 nF |
| 1000V | 120 pF | 390 pF | 820 pF | 2.7 nF | 8.2 nF | 15 nF | 12 nF | 39 nF | 82 nF | 120 pF | 390 pF | 820 pF |
| 2000V | | | | 390 pF | 1.2 nF | 2.7 nF | 2.2 nF | 6.8 nF | 18 nF | | | |

| | SR50 | | | SR60 | | | SR64 | | | SR65 | | |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 220 nF | 68 nF | 390 nF | 470 nF | 330 nF | 1.8 μF | 120 nF | 470 nF | 2.7 μF | 150 nF | 680 nF | 3.9 μF |
| 25V | 150 nF | 68 nF | 390 nF | 470 nF | 330 nF | 1.8 μF | 120 nF | 470 nF | 2.7 μF | 150 nF | 680 nF | 3.9 μF |
| 50V | 100 nF | 68 nF | 390 nF | 330 nF | 330 nF | 1.8 μF | 120 nF | 470 nF | 2.7 μF | 150 nF | 680 nF | 3.9 μF |
| 100V | 47 nF | 68 nF | 390 nF | 220 nF | 330 nF | 1.8 μF | 120 nF | 470 nF | 2.7 μF | 150 nF | 680 nF | 3.9 μF |
| 200V | 15 nF | 33 nF | 120 nF | 68 nF | 150 nF | 560 nF | 120 nF | 270 nF | 1.2 μF | 150 nF | 390 nF | 1.8 μF |
| 500V | 12 nF | 22 nF | 68 nF | 47 nF | 100 nF | 330 nF | 82 nF | 220 nF | 1.0 μF | 120 nF | 330 nF | 1.2 μF |
| 630V | 3.9 nF | 8.2 nF | 22 nF | 18 nF | 39 nF | 120 nF | 56 nF | 150 nF | 560 nF | 82 nF | 220 nF | 820 nF |
| 1000V | 820 pF | 1.2 nF | 3.9 nF | 3.3 nF | 6.8 nF | 22 nF | 18 nF | 27 nF | 120 nF | 27 nF | 39 nF | 180 nF |
| 2000V | 270 pF | 470 pF | 1.5 nF | 1.2 nF | 2.7 nF | 8.2 nF | 4.7 nF | 12 nF | 39 nF | 6.8 nF | 15 nF | 56 nF |
| 3000V | 120 pF | 180 pF | 820 pF | 680 pF | 1.2 nF | 4.7 nF | 3.3 nF | 6.8 nF | 27 nF | 4.7 nF | 10 nF | 39 nF |
| 4000V | | | | 390 pF | 820 pF | 2.7 nF | 2.2 nF | 3.9 nF | 15 nF | 3.3 nF | 5.6 nF | 22 nF |
| 5000V | | | | 120 pF | 220 pF | 680 pF | 680 pF | 1.5 nF | 4.7 nF | 1.0 nF | 2.2 nF | 6.8 nF |
| 8000V | | | | 68 pF | 150 pF | 390 pF | 470 pF | 820 pF | 2.2 nF | 680 pF | 1.2 nF | 3.3 nF |
| 10KV | | | | | | | | | | 470 pF | 820 pF | 2.2 nF |
| 12KV | | | | | | | | | | 270 pF | 560 pF | 1.8 nF |

| | SR68 | | | SR70 | | | SR74 | | | SR78 | | |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 10 pF | 47 pF | 100 pF | 10 pF | 47 pF | 100 pF | 10 pF | 33 pF | 100 pF | 10 pF | 47 pF | 100 pF |
| 100V | 220 nF | 820 nF | 5.6 μF | 270 nF | 1.0 μF | 5.6 μF | 270 nF | 1.0 μF | 6.8 μF | 330 nF | 1.2 μF | 8.2 μF |
| 200V | 220 nF | 820 nF | 5.6 μF | 270 nF | 1.0 μF | 5.6 μF | 270 nF | 1.0 μF | 6.8 μF | 330 nF | 1.2 μF | 8.2 μF |
| 500V | 220 nF | 560 nF | 2.7 μF | 270 nF | 680 nF | 2.7 μF | 270 nF | 820 nF | 3.3 μF | 330 nF | 1.0 μF | 3.9 μF |
| 630V | 180 nF | 470 nF | 1.8 μF | 220 nF | 560 nF | 2.2 μF | 220 nF | 560 nF | 2.7 μF | 270 nF | 680 nF | 2.7 μF |
| 1KV | 120 nF | 330 nF | 1.2 μF | 120 nF | 330 nF | 1.2 μF | 150 nF | 390 nF | 1.5 μF | 180 nF | 470 nF | 1.8 μF |
| 2KV | 39 nF | 56 nF | 270 nF | 47 nF | 56 nF | 270 nF | 47 nF | 68 nF | 330 nF | 56 nF | 82 nF | 390 nF |
| 3KV | 10 nF | 22 nF | 82 nF | 12 nF | 27 nF | 100 nF | 12 nF | 27 nF | 120 nF | 15 nF | 33 nF | 120 nF |
| 4KV | 6.8 nF | 15 nF | 56 nF | 8.2 nF | 15 nF | 56 nF | 8.2 nF | 18 nF | 68 nF | 10 nF | 22 nF | 82 nF |
| 5KV | 4.7 nF | 8.2 nF | 33 nF | 5.6 nF | 10 nF | 33 nF | 5.6 nF | 10 nF | 39 nF | 6.8 nF | 12 nF | 47 nF |
| 6KV | 2.7 nF | 5.6 nF | 18 nF | 2.7 nF | 5.6 nF | 22 nF | 3.3 nF | 6.8 nF | 22 nF | 3.9 nF | 8.2 nF | 27 nF |
| 8KV | 1.2 nF | 3.3 nF | 10 nF | 1.5 nF | 3.3 nF | 12 nF | 1.8 nF | 3.9 nF | 12 nF | 2.2 nF | 4.7 nF | 15 nF |
| 10KV | 1.0 nF | 1.8 nF | 4.7 nF | 1.0 nF | 5.6 nF | 1.2 nF | 1.2 nF | 2.2 nF | 5.6 nF | 1.5 nF | 2.7 nF | 6.8 nF |
| 12KV | 680 pF | 1.2 nF | 3.3 nF | 680 pF | 1.2 nF | 3.9 nF | 820 pF | 1.5 nF | 4.7 nF | 1.0 nF | 1.8 nF | 5.6 nF |
| 15KV | 390 pF | 680 pF | | 470 pF | 820 pF | | 470 pF | 820 pF | | 560 pF | 1.0 nF | |

| | SR82 | | | SR86 | | | SR90 | | | SR94 | | |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 10 pF | 33 pF | 100 pF | 10 pF | 47 pF | 100 pF | 22 pF | 68 pF | 180 pF | 22 pF | 68 pF | 180 pF |
| 100V | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 15 μF | 820 nF | 3.3 μF | 18 μF | 1.0 μF | 3.9 μF | 27 μF |
| 200V | 560 nF | 2.2 μF | 12 μF | 560 nF | 2.2 μF | 15 μF | 820 nF | 3.3 μF | 18 μF | 1.0 μF | 3.9 μF | 27 μF |
| 500V | 560 nF | 1.8 μF | 6.8 μF | 560 nF | 2.2 μF | 8.2 μF | 820 nF | 2.7 μF | 12 μF | 1.0 μF | 3.9 μF | 18 μF |
| 630V | 470 nF | 1.2 μF | 5.6 μF | 560 nF | 1.5 μF | 6.8 μF | 820 nF | 2.2 μF | 8.2 μF | 1.0 μF | 3.3 μF | 12 μF |
| 1KV | 330 nF | 820 nF | 3.3 μF | 390 nF | 1.0 μF | 3.9 μF | 560 nF | 1.5 μF | 5.6 μF | 820 nF | 2.2 μF | 8.2 μF |
| 2KV | 100 nF | 150 nF | 680 nF | 120 nF | 180 nF | 820 nF | 180 nF | 220 nF | 1.2 μF | 270 nF | 390 nF | 1.8 μF |
| 3KV | 27 nF | 68 nF | 220 nF | 33 nF | 82 nF | 270 nF | 47 nF | 100 nF | 390 nF | 68 nF | 150 nF | 560 nF |
| 4KV | 18 nF | 39 nF | 150 nF | 22 nF | 47 nF | 180 nF | 33 nF | 68 nF | 220 nF | 47 nF | 100 nF | 330 nF |
| 5KV | 12 nF | 22 nF | 82 nF | 15 nF | 27 nF | 100 nF | 22 nF | 39 nF | 150 nF | 33 nF | 56 nF | 220 nF |
| 6KV | 6.8 nF | 15 nF | 56 nF | 8.2 nF | 18 nF | 68 nF | 12 nF | 27 nF | 82 nF | 18 nF | 39 nF | 120 nF |
| 8KV | 3.9 nF | 8.2 nF | 27 nF | 4.7 nF | 10 nF | 33 nF | 5.6 nF | 15 nF | 47 nF | 8.2 nF | 22 nF | 68 nF |
| 10KV | 2.7 nF | 4.7 nF | 12 nF | 3.3 nF | 5.6 nF | 15 nF | 4.7 nF | 8.2 nF | 22 nF | 6.8 nF | 12 nF | 33 nF |
| 12KV | 1.8 nF | 3.3 nF | 10 nF | 2.2 nF | 3.9 nF | 12 nF | 2.7 nF | 5.6 nF | 15 nF | 4.7 nF | 8.2 nF | 22 nF |
| 15KV | 1.0 nF | 1.8 nF | | 1.2 nF | 2.2 nF | | 1.8 nF | 3.3 nF | | 2.7 nF | 4.7 nF | |

1) Max Values in italic obtained with BME part

AXIAL CAPACITOR Encapsulated

NPO N2T X7R 25V-5KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Severe environment
- Historical design



FEATURES

- Leaded radial MLCC capacitor
- Epoxy molded
- High reliability. 100% burn in
- Available in NPO. N2T. BX. 2X1. X7R
- Equivalent to wide range of competitors design
- Custom voltage. package size. capacitance value on request
- Tested in accordance to CECC 32100 and AEC-Q200
- NPO version CECC 30600 et NFC 83-131 compliant
- X7R version CECC 30700 et NFC 83-132 compliant
- 2C1 version NF 83-132 compliant
- High Reliability option : 168 hours burn in

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
X7R. N2T : - 55°C. + 125°C
NPO : - 55°C. + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : -2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

DISSIPATION FACTOR:
NPO/N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5U U≤200V | U+250V 200<U≤500 | 1.5U 500<U<1000 | 1.2U U≥1000
for 5s with 50mA max charging current

BURN IN :
Chips 24H+Stack 48H 125°C 2U U<500V | 1.5U 500≤U<1000 | 1.2U
1000≤U≤2000 | 1U U>2000


ORDERING INFORMATION

| SA | 70 | Y | 102 | J | A | V | - |
|--------|----------------------------|---|---|--|---|----------------------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | PACKAGING | SPECIAL |
| SA | 40 50 60 70 80 | A = NPO P = N2T X = BX Y = X7R BY=2C1 | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% | X = 25 V A = 50 V U = 63 V B = 100 V C = 200 V P = 250 V E = 500 V F = 630 V G = 1 KV H = 2 KV I = 3 KV K = 4 KV L = 5 KV | V = Bulk T = Tray | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us

DIMENSIONS (in millimeters)

| SIZE | SA40 | SA50 | SA60 | SA70 | SA75 | SA80 | SA90 |
|------------------------|------|------|------|------|------|------|------|
| Length (L) ±0.4 | 4.3 | 6.4 | 6.6 | 10.0 | 11.0 | 12.7 | 17.5 |
| Diameter (D) ±0.4 | 2.5 | 2.5 | 3.9 | 3.9 | 5.5 | 6.4 | 8.9 |
| Lead diameter (d) ±0.1 | 0.5 | 0.5 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 |
| Lead minimal length | 38 | 38 | 38 | 38 | 38 | 38 | 38 |

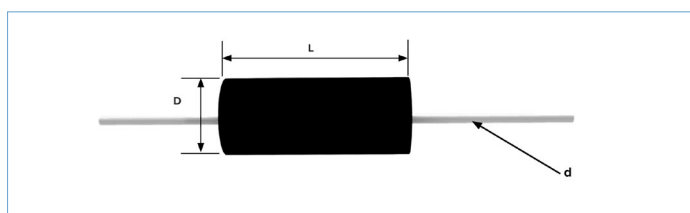

This document is subject to change without notice.

AXIAL CAPACITOR Encapsulated

NPO N2T X7R 25V-5KV



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

QUICK REFERENCE DATA (Max capacitance)

| | SA40 | | | SA50 | | | SA60 | | | SA70 | | |
|-------|--------|--------|-------------|--------|--------|-------------|--------|--------|-------------|--------|--------|-------------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 0.1 pF | 0.3 pF | 2.2 pF | 0.1 pF | 1.0 pF | 6.8 pF | 0.4 pF | 4.7 pF | 10 pF | 0.4 pF | 4.7 pF | 10 pF |
| 25V | 27 nF | 5.6 nF | 1.0 μ F | 470 nF | 15 nF | 4.7 μ F | 220 nF | 68 nF | 22 μ F | 220 nF | 68 nF | 22 μ F |
| 50V | 10 nF | 5.6 nF | 1.0 μ F | 47 nF | 15 nF | 4.7 μ F | 150 nF | 68 nF | 10 μ F | 150 nF | 68 nF | 10 μ F |
| 100V | 10 nF | 5.6 nF | 100 nF | 33 nF | 15 nF | 1.0 μ F | 100 nF | 68 nF | 4.7 μ F | 100 nF | 68 nF | 4.7 μ F |
| 200V | 2.2 nF | 5.6 nF | 39 nF | 10 nF | 15 nF | 100 nF | 47 nF | 68 nF | 390 nF | 47 nF | 68 nF | 390 nF |
| 250V | 2.2 nF | 5.6 nF | 27 nF | 10 nF | 15 nF | 82 nF | 47 nF | 68 nF | 330 nF | 47 nF | 68 nF | 330 nF |
| 500V | 1.0 nF | 2.7 nF | 6.8 nF | 3.3 nF | 10 nF | 27 nF | 39 nF | 47 nF | 180 nF | 39 nF | 47 nF | 180 nF |
| 630V | 680 pF | 1.5 nF | 3.9 nF | 2.7 nF | 6.8 nF | 15 nF | 39 nF | 39 nF | 120 nF | 39 nF | 39 nF | 120 nF |
| 1000V | 220 pF | 560 pF | 1.2 nF | 1.0 nF | 2.2 nF | 5.6 nF | 33 nF | 22 nF | 47 nF | 33 nF | 22 nF | 47 nF |
| 1500V | 68 pF | 180 pF | 390 pF | 270 pF | 680 pF | 2.2 nF | 2.7 nF | 6.8 nF | 18 nF | 2.7 nF | 6.8 nF | 18 nF |
| 2000V | | | | 150 pF | 390 pF | 820 pF | 1.2 nF | 3.3 nF | 8.2 nF | 1.2 nF | 3.3 nF | 8.2 nF |

| | SA75 | | | SA80 | | | SA90 | | |
|-------|--------|--------|-------------|--------|--------|-------------|--------|--------|-------------|
| | NPO | N2T | X7R | NPO | N2T | X7R | NPO | N2T | X7R |
| Min | 1.0 pF | 4.7 pF | 10 pF | 1.0 pF | 10 pF | 33 pF | 1.0 pF | 10 pF | 33 pF |
| 25V | 220 nF | 120 nF | 22 μ F | 470 nF | 330 nF | 47 μ F | 470 nF | 330 nF | 47 μ F |
| 50V | 220 nF | 120 nF | 6.8 μ F | 470 nF | 330 nF | 47 μ F | 470 nF | 330 nF | 47 μ F |
| 100V | 150 nF | 120 nF | 4.7 μ F | 330 nF | 330 nF | 15 μ F | 330 nF | 330 nF | 15 μ F |
| 200V | 100 nF | 120 nF | 820 nF | 150 nF | 330 nF | 1.8 μ F | 150 nF | 330 nF | 2.2 μ F |
| 250V | 100 nF | 120 nF | 820 nF | 150 nF | 330 nF | 1.8 μ F | 150 nF | 330 nF | 1.8 μ F |
| 500V | 47 nF | 100 nF | 330 nF | 100 nF | 220 nF | 820 nF | 100 nF | 270 nF | 1.0 μ F |
| 630V | 47 nF | 82 nF | 270 nF | 100 nF | 180 nF | 560 nF | 100 nF | 220 nF | 680 nF |
| 1000V | 15 nF | 47 nF | 120 nF | 100 nF | 120 nF | 330 nF | 100 nF | 120 nF | 390 nF |
| 1500V | 8.2 nF | 18 nF | 56 nF | 18 nF | 56 nF | 150 nF | 22 nF | 68 nF | 180 nF |
| 2000V | 3.9 nF | 8.2 nF | 22 nF | 12 nF | 22 nF | 68 nF | 12 nF | 27 nF | 82 nF |

1) Max Values in italic obtained with BME part

This document is subject to change without notice.

4 LEADS CAPACITOR Encapsulated


X7R 50V-500V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

APPLICATIONS

- Severe environment
- Historical design



FEATURES

- 4 Leaded radial MLCC capacitor
- Epoxy molded
- High reliability. 100% burn in
- Equivalent to concurrent design
- Straight or Crossed Electrodes
- Marking

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
X7R, N2T : - 55°C, + 125°C

TEMPERATURE COEFFICIENT :
X7R : ± 15% with 0Vdc applied

DISSIPATION FACTOR:
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
2.5U U≤200V | U+250V 200<U≤500

BURN IN :
Chips 24H+Stack 48H 125°C 2U U<500V | 1.5U 500≤

QUICK REFERENCE DATA (Max capacitance)

| | SF10/15 | SF20/25 | SF30/35 | SF40/45 | SF50/55 |
|------|---------|---------|---------|---------|---------|
| | X7R | X7R | X7R | X7R | X7R |
| Min | 1 µF | 1.5 µF | 1.8 µF | 3.3 µF | 5.6 µF |
| 50V | 18 µF | 27 µF | 39 µF | 82 µF | 120 µF |
| 100V | 5.6 µF | 10 µF | 18 µF | 27 µF | 39 µF |
| 200V | 2.7 µF | 3.9 µF | 6.8 µF | 12 µF | 18 µF |
| 500V | 1.5 µF | 1.8 µF | 3.3 µF | 5.6 µF | 8.2 µF |


ORDERING INFORMATION

| SF | 70 | Y | 102 | M | A | V | - |
|--------|--|------------|---|------------------------|---|-----------|---|
| SERIES | SIZE | DIELECTRIC | CAPACITANCE | TOLERANCE | VOLTAGE | PACKAGING | SPECIAL |
| SF | 10 15 20 25 30 35 40 45 50 55 | Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1 000pF For special values R is used as decimal separator Example 12R7 = 12.7pF 1340R0 = 1340pF | K = ± 10% M = ± 20% | A = 50 V B = 100 V C = 200 V E = 500 V | V = Bulk | - Dxx = Reliability spec Exx = Sorting spec |

For other sizes, voltage, tolerance contact us

DIMENSIONS (in millimeters)

| SIZE | SF10 | SF15 | SF20 | SF25 | SF30 | SF35 | SF40 | SF45 | SF50 | SF55 |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Lenght (L) ±0.5 | 20.0 | 20.0 | 20.0 | 20.0 | 20.0 | 20.0 | 20.0 | 20.0 | 20.0 | 20.0 |
| Width (W) ±0.5 | 19.0 | 20.0 | 19.0 | 20.0 | 19.0 | 20.0 | 19.0 | 20.0 | 19.0 | 20.0 |
| Height (T) max | 6.5 | 6.5 | 8.0 | 8.0 | 12.5 | 12.5 | 20.0 | 20.0 | 30.0 | 30.0 |
| Lead Spacing (S) ±0.5 | 17.8 | 15.24 | 17.8 | 15.24 | 17.8 | 15.24 | 17.8 | 15.24 | 17.8 | 15.24 |
| Lead Spacing (S1) ±0.5 | 10.16 | 12.7 | 10.16 | 12.7 | 10.16 | 12.7 | 10.16 | 12.7 | 10.16 | 12.7 |
| Lead diameter (d) ±0.1 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| Lead lenght (F) min | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |

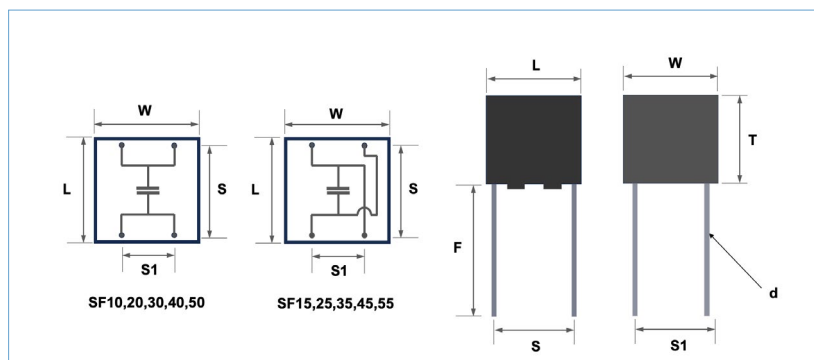

This document is subject to change without notice.

4 LEADS CAPACITOR Encapsulated

X7R 50V-500V



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

QUICK REFERENCE DATA (Max capacitance)

| | SF10/15 | SF20/25 | SF30/35 | SF40/45 | SF50/55 |
|------|-------------|-------------|-------------|-------------|-------------|
| | X7R | X7R | X7R | X7R | X7R |
| Min | 1 μ F | 1.5 μ F | 1.8 μ F | 3.3 μ F | 5.6 μ F |
| 50V | 18 μ F | 27 μ F | 39 μ F | 82 μ F | 120 μ F |
| 100V | 5.6 μ F | 10 μ F | 18 μ F | 27 μ F | 39 μ F |
| 200V | 2.7 μ F | 3.9 μ F | 6.8 μ F | 12 μ F | 18 μ F |
| 500V | 1.5 μ F | 1.8 μ F | 3.3 μ F | 5.6 μ F | 8.2 μ F |

This document is subject to change without notice.

APPLICATIONS

- If good electronic design dictates whenever it is possible to use standard components with multiple sources, some special needs can be only addressed with a custom developed product, as to allow gain in performance, compacity, reliability.
- With our highly flexible production, our offer in standard products covers a wide range of products, always without obsolescence.
- In addition to this standard range, designer can work with SRT-Microcéramique engineers to develop any combination of ceramic, voltage, capacity, package, reliability program to fit their exact needs.

OBSOLESCENCE

- The need to produce and maintain some electronic design for tens of years, often collides with the obsolescence policies of the major manufacturers. SRT-Microcéramique can provide strict equivalents to competitors designs, SMD, Stacks, Dipped, Encapsulated radials, axials... and insure its production overtime with its no obsolescence policy.

FORMAT

- For cross references needs or specific designs we can propose any SMD format between 0402 and 80300.
- Barcap, 4 corners, discs, arrays... can be proposed

CERAMIC

- In addition to its wide range of ceramic, type 1, type 2, N2T for power and pulse application, SRT-Microcéramique can also offer positive temperature coefficients, high temperature type 1 etc...

VOLTAGE

- Any specific voltage that is not in our standard range can be added (1100V, 1200V etc...) in order to optimize the component design.
- Very high voltage design up to 32KV.

CAPACITY

- Specific capacitance values that are not in the standard ISO range can be proposed.
- The codification of the specific P/N is based on the capacitance in picofarad with R as a decimal separator
- ex : 45,3pf = 45R3, 8320pf = 8320R0, 12.2nF = 12200R0

TERMINATION

- Any combination of components and termination, even if not present in our standard catalog can be proposed.
- Change of termination on any component, even if not produced by SRT, especially high value BME products is possible : Gold termination, dipped lead, dipped SAC, Silver-Palladium etc...

PACKAGE

- Any combination of stacks, leaded, dipped, encapsulated in any specific format can be proposed with PME SRT components or qualified BME high capacitance components.

SORTING


- SRT-Microcéramique, proposes on a regular basis, very high precision sorting for some of its customers.
- Up to 0.05% in Type 1, on specific value or cells.

RELIABILITY

- Depending on the Reliability need of the component, specific qualifications and testing programs can be agreed upon in addition to our standard process.
- Burn-In, LAT, RCS etc...
- SRT-Microcéramique regularly works with space, medical and defense customers.

DESIGN PROCESS

- Working directly with our engineers and depending on the development difficulty, custom design can be proposed in 8 to 10 weeks.
- The first samples could require some tooling and development cost, but every effort will be made to propose consistent and as competitive as possible price for production volume.
- A specific datasheet for the custom product will be provided and the no obsolescence policy will guarantee the production over the years.

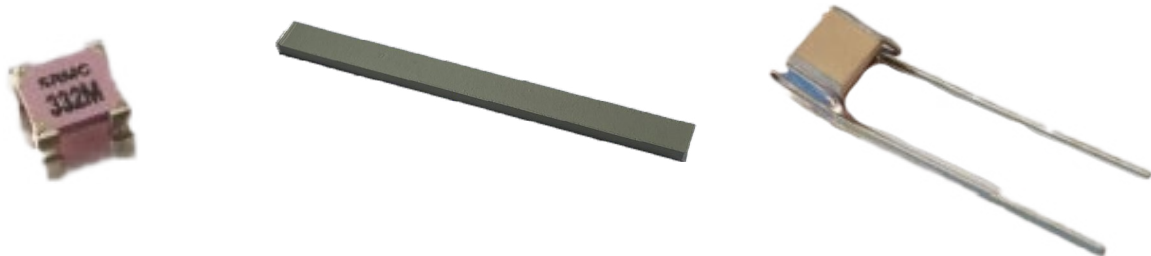



SIZE

| SRT | EXXELIA | AVX | SYFER |
|-------------------|--|-----------|-------|
| 0306 (on demand) | | 0306/LD16 | |
| 0402 | CEC/CNC 19 ...SHL | 0402 | 0402 |
| 0403 (on demand) | CEC/CNC 17 | | |
| 0405 (on demand) | | | |
| 0504 | CEC/CNC 1 | | |
| 0505 | ...SHA | | |
| 0508 | CER/CNR 2 | 0508/LD17 | |
| 0603 | CEC/CNC 19 R14 ...SHS | 0603 | 0603 |
| 0612 (on demand) | CER/CNR 12 | 0612/LD18 | |
| 0709 (on demand) | ...SHR | | |
| 0711 (on demand) | ...SHD | | |
| 0805 | CEC/CNC 2 R15 ...SHF | 0805 | 0805 |
| 0907 (on demand) | CEC/CNC 18 | | |
| 1005 (on demand) | CEC/CNC 8 | | |
| 1111 | ...SHB/...NHB | | |
| 1206 | CEC/CNC 12 R18 ...SHN | 1206 | 1206 |
| 1210 | CEC/CNC 4 S41 ...SHT | 1210 | 1210 |
| 1515 | C1/C2/C4 78 | | |
| 1605 | CEC/CNC 9 | | |
| 1806 | CEC/CNC 3 | | |
| 1808 | | | 1808 |
| 1812 | CEC/CNC 6 S43 C1/C2/C4 79 | 1812 | 1812 |
| 1825 | CEC/CNC 70 C1/C2/C4 90 | 1825 | 1825 |
| 2210 (on demand) | CEC/CNC 5 | | |
| 2220 | CEC/CNC 7 S47 C1/C2/C4 80 ...CLX | 2220 | 2220 |
| 2225 | CEC/CNC 71 C1/C2/C4 91 ...R2225 ...CPX | 2225 | 2225 |
| 2528 (on demand) | CEC/CNC W | | |
| 2825 | C1/C2/C4 81 | | |
| 3030 (on demand) | CEC/CNC X | | |
| 3040 (on demand) | CEC/CNC 72 | | |
| 3033 | ...R3033 | | |
| 3333 | C1/C2/C4 82 | | |
| 3640 | | 3640 | 3640 |
| 3740 | ...R3740 | | |
| 4040 | C1/C2/C4 83 ...CPE/...CLE | | |
| 5440 | C1/C2/C4 84 ...R5440 | | |
| 5550 | C1/C2/C4 89 ...R5550 | | 5550 |
| 6080 | ...R6080 | | |
| 6560 | C1/C2/C4 85 | | |
| 7065 | ...CLF | | |
| 8060 | ...R8060 | | 8060 |
| 45107 (on demand) | ...R45107 | | |
| 11283 (on demand) | C1/C2/C4 87 | | |
| 16080 (on demand) | C1/C2/C4 88 | | |

CERAMIC

| CERAM | SRT | EXXELIA | AVX | SYFER |
|--------|---------|--------------------------------|------|---------------|
| NPO | xxA... | CEC CER ...R..N C1... | ...A | C/Q/U/A/K/F/G |
| BX | xxX... | CNC | | B |
| 2C1 | xxBY... | CNC | | R |
| X7R | xxY... | CNC CNR ...R..X ...R...T C2... | ...C | X/J/S/E/D |
| High Q | xxQ... | ...CH ...SH ...CL ...CP | | |



TERMINATION

| CERAM | SRT | EXXELIA | AVX | SYFER |
|------------------------|-----------|---------|-----|-------|
| Ag | Q | Q | | |
| Ag+Ni+dipSn/Pb60/40 | H | T | | |
| Ag/Pd/Pt+dipSn/Pb60/40 | on demand | H | | |
| Ag+Ni +eISn/Pb95/5 | I | C | | |
| Ag+Ni +eISn/Pb60/40 | on demand | D | | |
| Ag+Ni +dipSn/Pb60/40 | H | E | | |
| Ag+Ni+Au | W | G | G | |
| Ag+PoLY+Ni+Sn/Pb95/5 | on demand | YC | | |
| Ag+PoLY+Ni+Sn/Pb60/40 | on demand | YD | | |
| Ag+ Poly +Ni+Au | on demand | YG | | |
| Ag/Pd/Pt ROHS | F | W | | |
| Ag ROHS | Q | QW | | |
| Ag/Pd/Pt+ dip Sn ROHS | on demand | HW | | |
| Ag+Ni+ eI SnAg ROHS | on demand | CW | | |
| Ag + Ni + eI Sn ROHS | X | EW | T | J |
| Ag + Ni + Au ROHS | W | GW | | |
| Ag+Poly+Ni+Sn ROHS | P | YCW | Z/X | H |
| Ag+ Poly +Ni+Au ROHS | on demand | YGW | | |
| Sn/Cu/Ag | C | C | | 2 |
| Ag/Pd | F | A | 1 | F |

RADIAL CAPACITOR Dipped

Cross References



SIZE

| LEAD SP MM | SRT | EXXELIA | AVX | SYFER |
|------------|--------|--|------------------------|-------------------------------------|
| 2,54 | SRMC31 | TC 77-5 TCN 72-5 | SR15 | 8111M LE0805 |
| | SRMC32 | TCE TCX TCN TXR 78-5 TCN 73-5 | SR20 | 8121M LR1206 |
| 4,32 | SRMC38 | TKD 79 TKD 90 | SV01 | LE1515 |
| 5,08 | SRMC40 | TCE TCX TCN TXR 77-1 TCE TCX TCN TXR 78-1 TCN 72-1 | | LD0805 8111N LD1206 LD1210 |
| | SRMC41 | TCL 79 TCL 90 TCF 78 TCN 73-1 | SR21 | |
| | SRMC43 | TCF 79 TCL 80 TCL 91 non magn S43 | | LE1812 |
| | SRMC44 | TCE TCX TCN TXR 79-5 TCN 74-5 R 2225 TCF 80 TCF 90 TCF 91 non magn S47 | SV13/SV63 SR30 | 8131M LB2225 |
| | SRMC45 | TCE TCX TCN TXR 80-5 TCN 75-5 TEF 3033 R 3033 | SR40 SV14/SV64 | 8141M |
| 5,60 | SRMC47 | TKD 80 TKD 91 | SV02/SV52 | |
| 6,35 | SRMC48 | | SR22 | LQ1206 |
| 7,00 | SRMC49 | TKD 81 | SV03/SV53 | LE2520 |
| 7,62 | SRMC52 | | SR27 | |
| | SRMC54 | TCL 81 TCF 81 | SV04/SV54 | 8121T 8131T |
| 9,52 | SRMC58 | TKD 82 | SV05/SV55 | LE3530 |
| 10,16 | SRMC60 | TCL 82 TCF 82 | | |
| | SRMC63 | R 3740 TEF 3740 TCE TCX TCN TXR 76-5 | SR50 SV15/SV65 | 8151M |
| 12,10 | SRMC68 | TKD 83 | SV07/SV57 | LE4540 |
| 12,70 | SRMC72 | TCL 83 TCF 83 | | |
| | SRMC74 | TKD 84 TEF 5550 | SV08/SV58 | 8161M LE5550 |
| 15,24 | SRMC76 | TCL 84 TCL 89 R 5550 TCF 84 | | |
| | SRMC80 | R 6080 TEF 6080 | | |
| 17,10 | SRMC82 | TKD 85 | SV09/SV59 | LE6560 8165M |
| | SRMC84 | TCL 85 TCF 85 R 6560 | | |
| 20,30 | SRMC88 | R 8060 | SV17/SV67 SV16/SV66 | LE7565 |
| 21,00 | SRMC90 | TEF 8060 | | 8111M |
| | SRMC91 | TKD 87 | SV10 | |
| 29,94 | SRMC92 | TCL 87 TCF 87 | SV11 | |
| | SRMC96 | TKD 88 TCL 88 TCF 88 | | |

CERAMIC/TERMINATION

| CERAM | SRT | EXXELIA | AVX | SYFER |
|-------|------------|--|------------------------|-----------------|
| NPO | SRMCxxA... | TCE... | SRxxxA... | 81...C... |
| | | Non magnetic N... TCK1... TCL1... TCF1... TKD1... | SLxxxA... ARxxxA... | LE0805 |
| BX | SRMCxxX... | TCX... | SR20 | 8121M LR1206 |
| X7R | SRMCxxY... | TXR... | SRxxxC... | 81...X... |
| | | Non magnetic X... TCK2... TCL2... TCF2... TKD2... | SLxxxC... ARxxxC... | |

This document is subject to change without notice.



SIZE

| LEAD SP MM | SRT | EXXELIA | AVX | SYFER |
|------------|-----------|--|------|------------|
| 2.54 | SR41 | TCE TCX TCN TXR 61 LA 1 LA 2 TCE 11 L/Y TCN 31 Y TCE 13 L/Y | | |
| | SR43 | TCE TCX TCN TXR 62 TCE 11 L/I TCN 31 I TCE 13 L/I | MR04 | |
| 4.32 | SR45 | | | Syfer 1515 |
| 5.08 | SR47 | TCE TCX TCN TXR 62N CK 05 TCE 11 NY TCN 31 NY TCE 13 NY | | |
| | SR50 | TCE TCX TCN TXR 50 TCE TCX TCN TXR 62N LA 3 TCE 11 N/I TCN 31 N/I TCE 13 N/I TCN 19 low capa | MR05 | |
| | SR60 | TCE TCX TCN TXRK 79 TCE TCX TCN TXRK 90 CK 06 TCE TCX TCN TXR 60 TCE TCX TCN TXR 63 LA 5A LA 5B LA 5C TCE TCX TCN TXRK 80 TCE TCX TCN TXRK 91 TCE 11 L/J TCN 30 J TCE 13 L/J TCN 31 J TCN 19 high capa | MR06 | |
| | SR64 | TCE TCX TCN TXR 64 TCE 11 L/O TCN 30 O TCE 13 L/O TCN 31 O | | Syfer 2520 |
| 7.62 | SR65 | TCE TCX TCN TXRK 81 | | - |
| 10.16 | SR68 | | MR07 | |
| | SR70 | TCE TCX TCN TXRK 82 | MR08 | Syfer 4540 |
| | SF10/SF15 | TCN83-1/TCN-86-1 | | |
| | SF20/SF25 | TCN83-2/TCN-86-2 | | |
| | SF30/SF35 | TCN83-3/TCN-86-3 | | |
| | SF40/SF45 | TCN83-4/TCN-86-4 | | |
| | SF50/SF55 | TCN83-5/TCN-86-5 | | |
| 12.20 | SR74 | TCE TCX TCN TXRK 83 | | Syfer 5550 |
| 15.20 | SR78 | TCE TCX TCN TXRK 84 TCE TCX TCN TXRK 89 | | |
| 17.30 | SR82 | TCE TCX TCN TXRK 85 | | Syfer 6560 |
| 19.80 | SR86 | | | Syfer 7565 |
| 27.90 | SR90 | TCE TCX TCN TXRK 87 | | |
| 40.60 | SR94 | TCE TCX TCN TXRK 88 | | |

CERAMIC/TERMINATION

| CERAM | SRT | EXXELIA | AVX | SYFER |
|-------|----------|----------------------------|-----------|-----------------------|
| NPO | SRxxA... | TCE... TCK1... LA1-5 | MRxxxA... | xxxxN... xxxxRN... |
| BX | SRxxX... | TCX... | | |
| 2C1 | SRxxBY | CK5... CK6... | | |
| X7R | SRxxY... | TCN TCK2 TCK4 | MRxxxC... | xxxxB... xxxxRB... |



SIZE

| DIAMETER | SRT | EXXELIA | AVX | KEMET |
|----------|---------|----------|---------|---------|
| 2.5 | SA40... | TC52R... | MA10... | C114... |
| | SA50... | | MA20... | C124... |
| 3.9 | SA60... | TC53R... | | |
| | SA70... | TC54R... | MA30... | C192... |
| 5.5 | SA75... | TC55R... | | |
| 6.4 | SA80... | | MA40... | C202... |

CERAMIC/TERMINATION

| CERAM | SRT | EXXELIA | AVX | KEMET |
|-------|----------|---------|-----------|-----------|
| NPO | SAXxA... | TCE... | MA...A... | C....G... |
| BX | SAXX... | TCX... | | C....X... |
| 2C1 | SAXxBY | TCN... | | |
| X7R | SAXxY... | TXR... | MA...C... | C....R... |



SIZE

| SRT | EXXELIA | AVX |
|-----------|------------|-----------------|
| SRMC1210 | | |
| SRMC1812 | | |
| SRMC1825 | | |
| SRMC2220 | | |
| SRMC2225 | SC00 | |
| SRMC2825 | | |
| SRMC3033 | SC01/TEV53 | CH42-44/CH41-44 |
| SRMC3640 | SC02/TEV54 | CH52-54/CH51-54 |
| SRMC4040 | | |
| SRMC40150 | | CH82-84/CH81-84 |
| SRMC5550 | SC04/TEV55 | CH62-64/CH61-64 |
| SRMC6080 | SC06/TEV56 | CH72-74/CH71-74 |
| SRMC60110 | | CH87-89/CH86-89 |
| SRMC6660 | SC05 | |
| SRMC8060 | SC07/TEV65 | CH77-79/CH76-79 |
| SRMC80100 | SC10 | |
| SRMC80150 | SC12/TEV58 | CH92-94/CH91-94 |

FORM

| FORM | SRT | EXXELIA | AVX |
|---------|----------|-----------------|---------|
| L | ...L... | ...DL... | ...0A7 |
| J | ...J... | ...DJ... | ...0A8 |
| D | ...D... | ...DN... | ...0A0 |
| M | ...M... | | |
| 4 Wires | ...Ux... | ...U4.../TEV... | ...3xx4 |

CERAMIC

| CERAM | SRT | EXXELIA | AVX |
|-------|---------|-----------------|---------|
| NPO | ...A... | | |
| X7R | ...Y... | ...X.../...T... | ...C... |



SIZE

| SRT | EXXELIA | KEMET |
|-------------|------------|-------------|
| SRTV1210... | | |
| SRTV1812... | | |
| SRTV2220... | | L1G...69... |
| SRTV2225... | | L1G...70... |
| SRTV3033... | ..SV01... | |
| SRTV3640... | ..SV02... | |
| SRTV4040... | | |
| SRTV5440... | | |
| SRTV5550... | ...SV01... | |
| SRTV6560... | ...SV05... | |
| SRTV6080... | ...SV07... | |
| SRTV8060... | ...SV07... | |

EXEMPLE

- SRT : SRTV3740Y106KAT6BE25 = Exxelia : 500SV02X106KW2C



SERIES

| EXXELIA | LECLANCHE CAPACITORS |
|---------|----------------------|
| A64 | CKM 501-4BDF |
| A64S | MKP d |
| A74 | CKM 501-4BDF |
| BIK | PPM g |
| HT77 | KN g |
| KM 311 | CKM 311 |
| KM 501 | CKM 501 |
| KM 94 | MKS SMD |
| KM711 | MKP df / MKS df |
| KM82 | MKS gb |
| KSP4 | KC-4 |
| MKT | MKT b |
| MPA4W | CKT 501-4BDF |
| PHM912 | MKNHV |
| PLP3 | PPM r |
| PLS3 | KPh/KSh |
| PM 50 | MKT g |
| PM 60 | MKT d |
| PM 7 | MKT df |
| PM 89 | MKT-4 a |
| PM 90 | MKT-4 g |
| PM 94 | MKT SMD |
| PM90-R2 | MKT SMF |
| PMA 64 | MKT g/ga |
| PMR 64 | MKP g |
| PP 20 | PPM h |
| PP 78 A | PPM d |
| PP 78 R | PPM g |
| PP12W | PPM c2 |
| PPS 16 | KP |
| PRM 4 | CKM 501-4BG |
| R64S | MKP g |
| RA 1 | KPS d |
| RA 2 | KPS d |
| RA 3 | KPS d |
| RA 4 | KPS d |
| RA 75 | KPS d |
| SP270UL | MKS df |
| SP2767 | PPM 110-1.0 dv (K) |
| SP289UL | MKS df |
| SP2961 | MKT-4 50-4.7 a (K) |
| SP2962 | MKT-4 50-15.0 a (K) |
| SP2986W | PAM 85-2.0 cv2 (K) |
| SP3187 | PPM 150-047 c (K) |
| SP3188 | PPM 210-025 c (K) |



SRT
MICROCÉRAMIQUE
MLCC CAPACITORS

www.srt-mc.com

Rue Mons
Parc Technologique de L'oratoire
41100 Vendôme - France



*For any inquiry please contact
our commercial engineer team :*

T + 33 2 54 67 50 50

@ contact@srt-mc.com